


VHF DIGITAL TRANSCEIVER
NX-200(S)
SERVICE MANUAL
K version

KENWOOD

JVC KENWOOD Corporation

© 2011-10 PRINTED IN JAPAN
B51-8991-00 (Y) 330

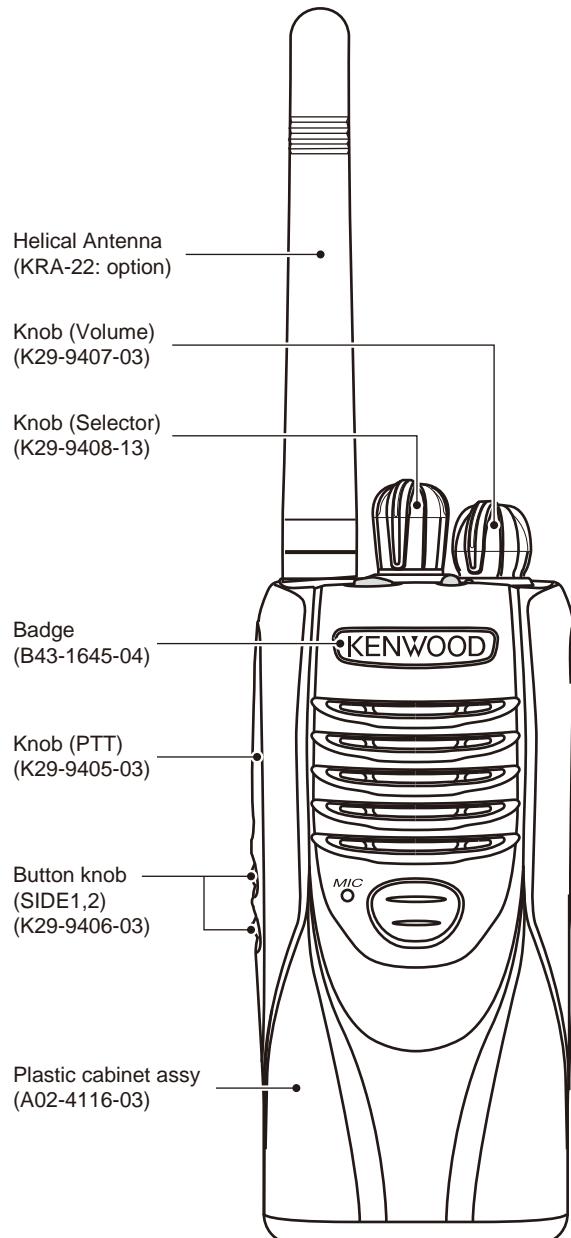

CONTENTS

GENERAL	2
SYSTEM SET-UP	3
REALIGNMENT	4
INSTALLATION	6
DISASSEMBLY FOR REPAIR	7
CIRCUIT DESCRIPTION	11
COMPONENTS DESCRIPTION	17
PARTS LIST	19
EXPLODED VIEW	30
PACKING	31
TROUBLE SHOOTING	32
ADJUSTMENT	36
TERMINAL FUNCTION	54
PC BOARD	
CONTROL UNIT (X53-4432-75)	62
TX-RX UNIT (X57-7820-10)	66
INTERCONNECTION DIAGRAM	70
SCHEMATIC DIAGRAM	72
BLOCK DIAGRAM	86
LEVEL DIAGRAM	90
OPTIONAL ACCESSORIES	
KNB-47L (Li-ion Battery Pack)	91
KNB-48L (Li-ion Battery Pack)	91
SPECIFICATIONS	BACK COVER

Does not come with antenna. Antenna is available as an option.

This product complies with the **RoHS** directive for the European market.



This product uses Lead Free solder.

NX-200(S)

Document Copyrights

Copyright 2011 by JVC KENWOOD Corporation. All rights reserved.

No part of this manual may be reproduced, translated, distributed, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, for any purpose without the prior written permission of JVC KENWOOD Corporation.

Disclaimer

While every precaution has been taken in the preparation of this manual, JVC KENWOOD Corporation assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein. JVC KENWOOD Corporation reserves the right to make changes to any products herein at any time for improvement purposes.

Firmware Copyrights

The title to and ownership of copyrights for firmware embedded in Kenwood product memories are reserved for JVC KENWOOD Corporation. Any modifying, reverse engineering, copy, reproducing or disclosing on an Internet website of the firmware is strictly prohibited without prior written consent of JVC KENWOOD Corporation. Furthermore, any reselling, assigning or transferring of the firmware is also strictly prohibited without embedding the firmware in Kenwood product memories.

Transceivers containing AMBE+2™ Vocoder:

The AMBE+2™ voice coding technology is embedded in the firmware under the license of Digital Voice Systems, Inc.

GENERAL

INTRODUCTION

SCOPE OF THIS MANUAL

This manual is intended for use by experienced technicians familiar with similar types of commercial grade communications equipment. It contains all required service information for the equipment and is current as of the publication date. Changes which may occur after publication are covered by either Service Bulletins or Manual Revisions. These are issued as required.

ORDERING REPLACEMENT PARTS

When ordering replacement parts or equipment information, the full part identification number should be included. This applies to all parts : components, kits, or chassis. If the part number is not known, include the chassis or kit number of which it is a part, and a sufficient description of the required component for proper identification.

PERSONAL SAFETY

The following precautions are recommended for personal safety:

- DO NOT transmit until all RF connectors are verified secure and any open connectors are properly terminated.
- SHUT OFF and DO NOT operate this equipment near electrical blasting caps or in an explosive atmosphere.
- This equipment should be serviced by a qualified technician only.


SERVICE

This transceiver is designed for easy servicing. Refer to the schematic diagrams, printed circuit board views, and alignment procedures contained within.

NOTE

You must use KPG-111D version 2.70 or later for this transceiver. KPG-111D versions earlier than version 2.70 will not work properly.


SYSTEM SET-UP

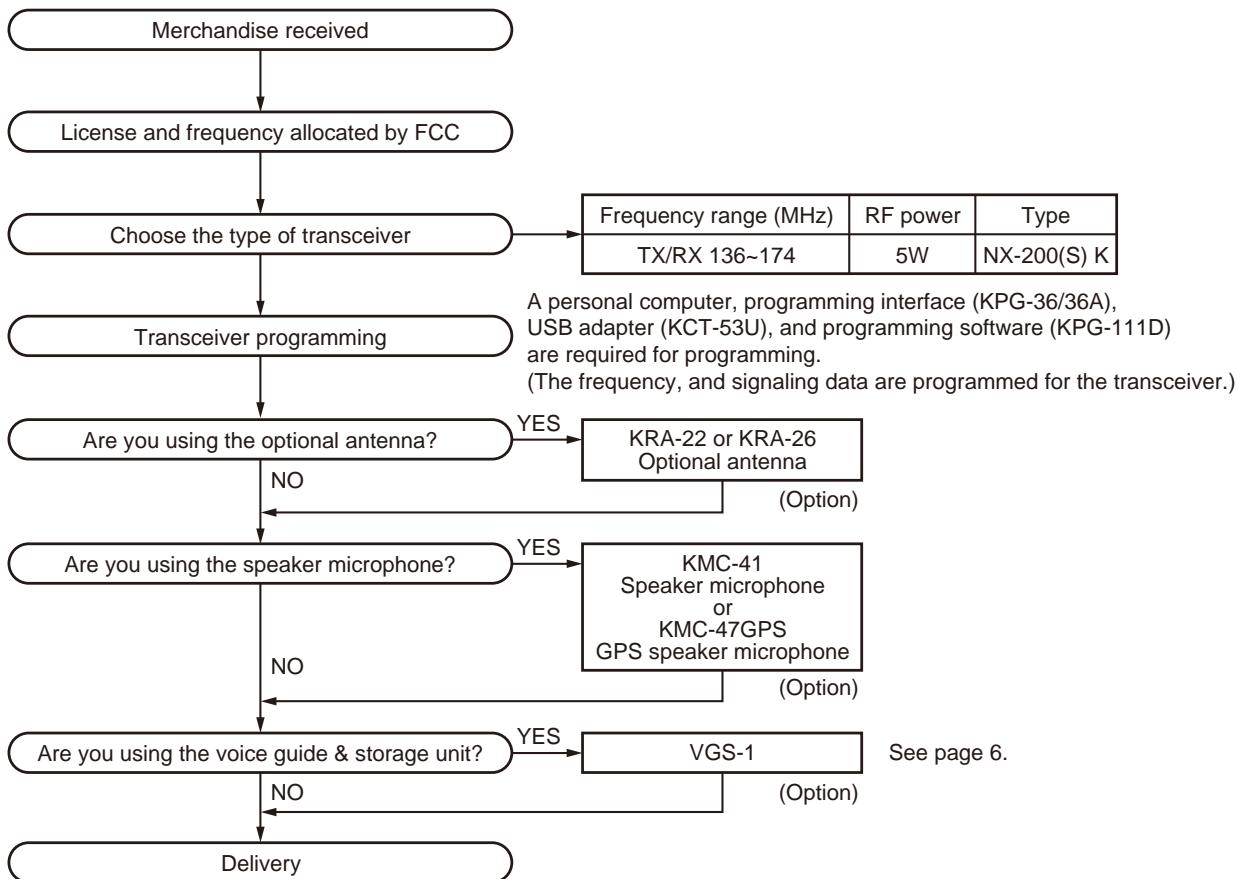

NX-200(S)

REALIGNMENT

1. Modes

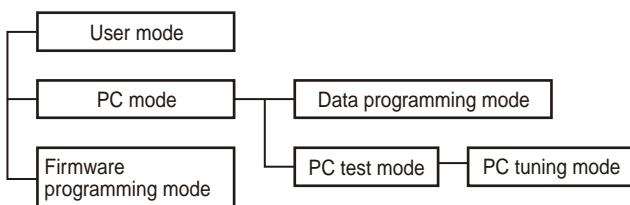

Mode	Function
User mode	For normal use.
PC mode	Used for communication between the transceiver and PC.
Data programming mode	Used to read and write frequency data and other features to and from the transceiver.
PC test mode	Used to check the transceiver using the PC. This feature is included in the FPU.
Firmware programming mode	Used when changing the main program of the flash memory.

2. How to Enter Each Mode

Mode	Operation
User mode	Power ON
PC mode	Received commands from PC
Firmware programming mode	[AUX (orange)] + Power ON

3. PC Mode

3-1. Preface

The transceiver is programmed by using a personal computer, programming interface (KPG-36/36A), USB adapter (KCT-53U) and programming software (KPG-111D ver. 2.70 or later).

The programming software can be used with a PC. Figure 1 shows the setup of a PC for programming.

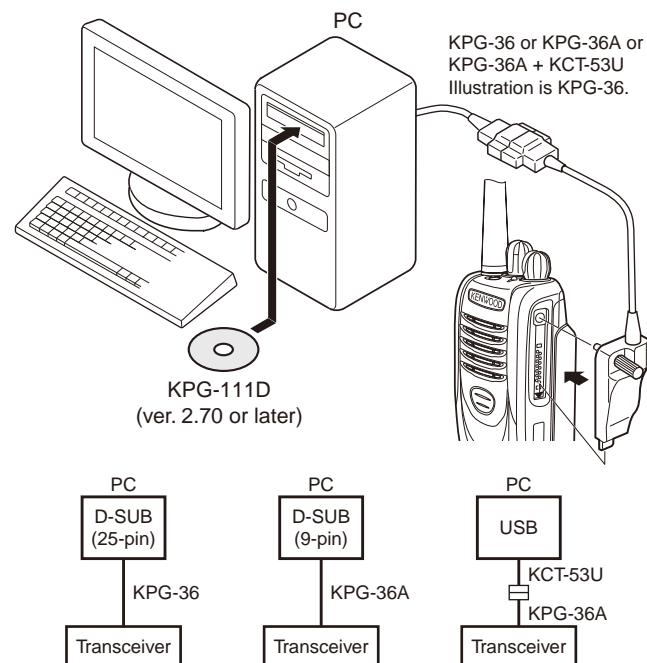


Fig. 1

3-2. Connection procedure

1. Connect the transceiver to the computer using the interface cable and USB adapter (When the interface cable is KPG-36A, the KCT-53U can be used.).

Note:

- You must install the KCT-53U driver in the computer to use the USB adapter (KCT-53U).
 - When using the USB adapter (KCT-53U) for the first time, plug the KCT-53U into a USB port on the computer with the computer power ON.
2. When the POWER is switched on, you can immediately enter user mode.
When data is transmitting from the transceiver, the red LED lights.
When data is receiving by the transceiver, the green LED lights.

Note:

The data stored in the computer must match the "Model Name" when it is written into the flash memory.

REALIGNMENT

3-3. KPG-36/KPG-36A description

(PC programming interface cable: Option)

The KPG-36/36A is required to interface the transceiver to the computer. It has a circuit in its D-sub connector (KPG-36: 25-pin, KPG-36A: 9-pin) case that converts the RS-232C logic level to the TTL level.

The KPG-36/36A connects the universal connector of the transceiver to the RS-232C serial port of the computer.

3-4. KCT-53U description (USB adapter: Option)

The KCT-53U is a cable which connects the KPG-36A to a USB port on a computer.

When using the KCT-53U, install the supplied CD-ROM (with driver software) in the computer. The KCT-53U driver runs under Windows 2000, XP or Vista (32-bit).

3-5. Programming software KPG-111D description

The KPG-111D is the programming software for the transceiver supplied on a CD-ROM. This software runs under Windows XP, Vista or 7 on a PC.

The data can be input to or read from the transceiver and edited on the screen. The programmed or edited data can be printed out. It is also possible to tune the transceiver.

4. Firmware Programming Mode

4-1. Preface

Flash memory is mounted on the transceiver. This allows the transceiver to be upgraded when new features are released in the future. (For details on how to obtain the firmware, contact Customer Service.)

4-2. Connection procedure

Connect the transceiver to the personal computer using the interface cable (KPG-36/36A) and USB adapter (KCT-53U: when the interface cable is KPG-36A, the KCT-53U can be used.). (Connection is the same as in the PC Mode.)

4-3. Programming

1. Start up the firmware programming software (Fpro.exe (ver. 6.10 or later)). The Fpro.exe exists in the KPG-111D installed folder.
2. Set the communications speed (normally, 115200 bps) and communications port in the configuration item.
3. Set the firmware to be updated by File name item.
4. Press and hold the [AUX (orange)] key while turning the transceiver power ON. Then, the orange LED on the transceiver lights.
5. Check the connection between the transceiver and the personal computer, and make sure that the transceiver is in the Program mode.
6. Press "write" button in the window. When the transceiver starts to receive data, the green LED on the transceiver lights.
7. If writing ends successfully, the red LED on the transceiver lights.
8. If you want to continue programming other transceivers, repeat steps 4 to 7.

Note:

This mode cannot be entered if the Firmware Programming mode is set to Disable in the Programming software.

4-4. Function

1. Each press of the [Side2] key changes the writing speed as shown below. Additionally, the LED color changes according to the writing speed.

19200 bps	LED blinks green
38400 bps	LED alternates between red and orange
57600 bps	LED blinks orange
115200 bps	LED lights orange

Note:

Normally, write in the high-speed mode.


NX-200(S)

INSTALLATION


Voice Guide & Storage Unit (VGS-1: Option)

■ Installing the VGS-1 (Voice Guide & Storage Unit) in the transceiver

1. Remove the two screws from the cover.
2. Remove the cover by inserting the tip of a pair of tweezers into the screw hole of the cover and prying it open.

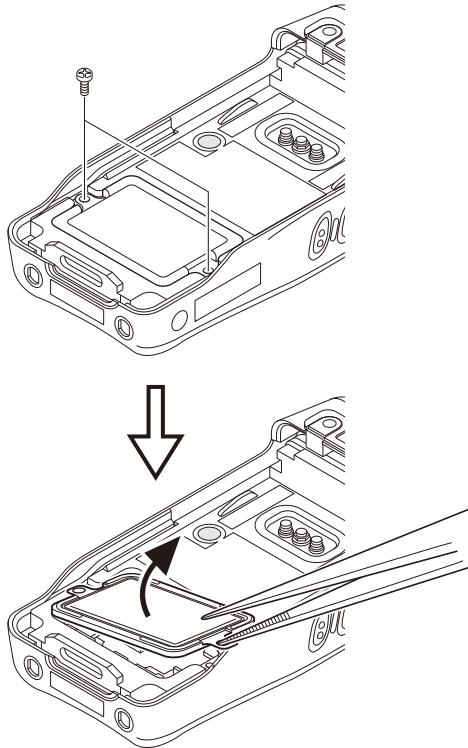

3. Remove the OPTION PCB from the connector (CN710) of the Control PCB.

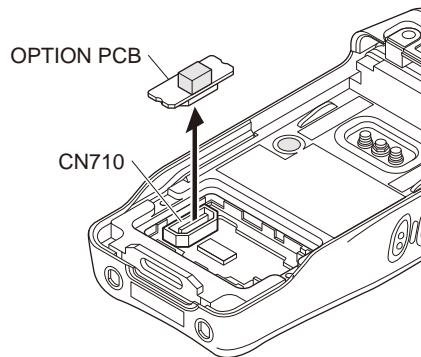

4. Attach the flat spring (G02-1846-03) to the VGS-1 as shown in the figure.

Note:


Attach the flat spring so that its convex fits the PCB hollow of the VGS-1.

5. Attach the cushion (G13-1974-04) to the VGS-1 as shown in the figure.

Note:

Be sure not to cover the VGS-1 connector with the cushion.

6. Insert the VGS-1 connector into the connector (CN710) of the Control PCB.

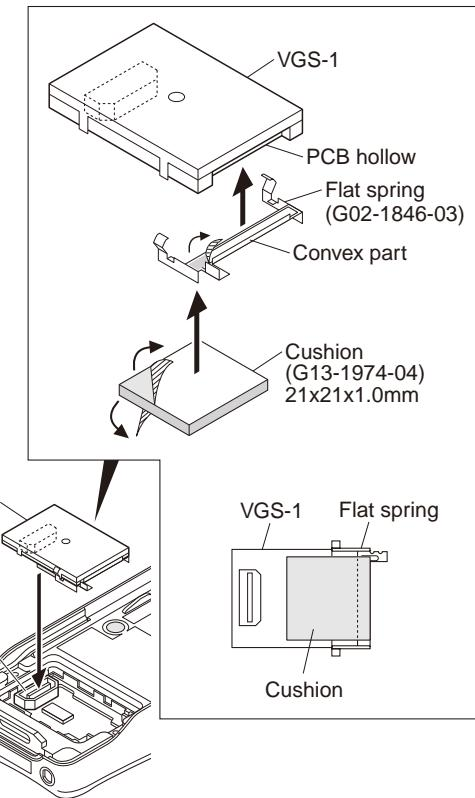


7. Reinstall the cover using the two screws removed in step 2.

DISASSEMBLY FOR REPAIR

1. Precautions for Waterproof


- Do not remove the black sheet from the reverse side of the transceiver (refer to the illustration below). Removal of this sheet decreases the waterproof efficiency of the transceiver and may cause malfunctions if water seeps into the transceiver.
- The orange packing material on the reverse side of the transceiver is important with respect to the waterproof efficiency of the transceiver. Do not place stickers or other materials on or around the packing material shown in the figure, or on the reverse side of the battery pack. Doing so will impair the waterproof efficiency of the transceiver and may cause it to break down. Additionally, in order to prevent damage to the packing material, do not allow it to come in contact with foreign materials.

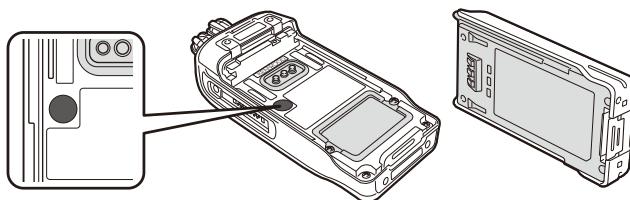

2. Precautions for Disassembly



■ Disassembly procedure

- Remove the channel knob ① and volume knob ②.
- Remove the two screws ③.
- Lift and remove the chassis from the case.

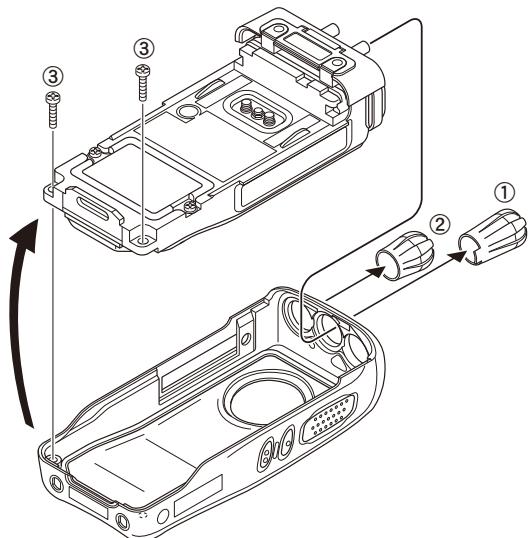

■ Removing the TX-RX unit from the chassis

- Remove the cord ASSY from the connector of the TX-RX unit (CN400) ①.
- Remove the PTT FPC from the connector of the TX-RX unit (CN401) ②.
- Remove the 14 screws ③.
- Anchor the screw hole of the TX-RX unit using the tip of a pair of tweezers as shown in the figure. Then, lift the TX-RX unit to remove it from the chassis ④.

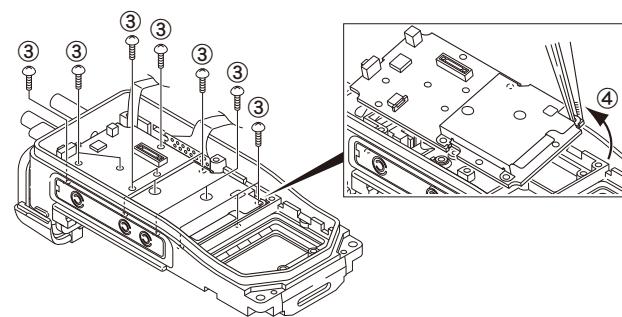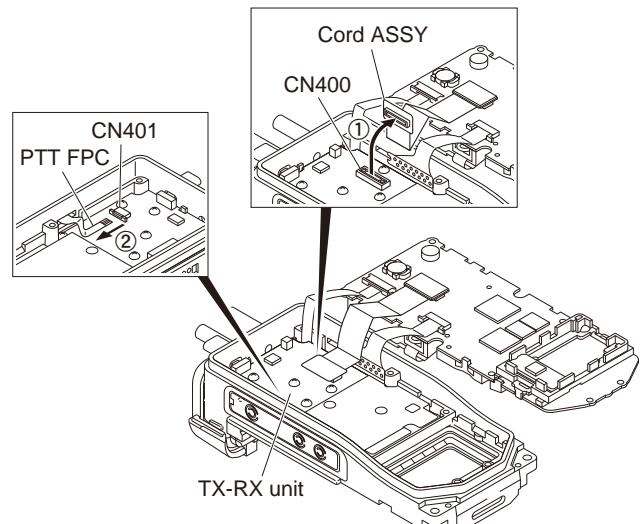


NX-200(S)

DISASSEMBLY FOR REPAIR


■ Removing the TOP packing (G53-1762-02)

1. Pull the TOP packing to the left to remove the packing that is fit into the left groove of the chassis ①.
2. Pull the TOP packing to the right to remove the packing that is fit into the right groove of the chassis ②.
3. Turn back the TOP packing as shown in the figure ③.
4. Remove the TOP packing ④.

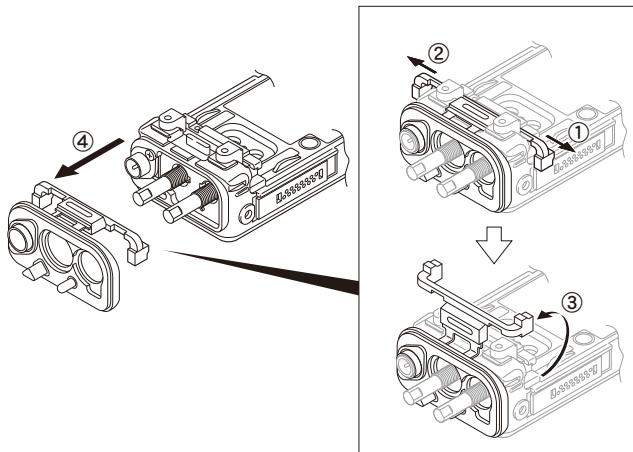

■ Removing the lithium cell (W09-0971-05)

Insert a non-conductive screwdriver to groove of one side of the socket (CN401) and pry the lithium cell up from the socket.

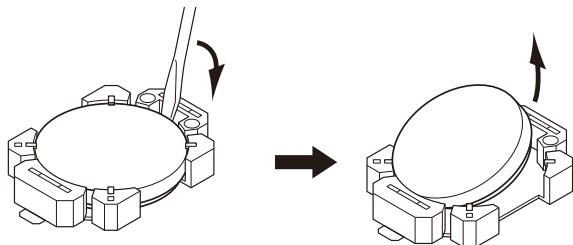

■ Installing the lithium cell (W09-0971-05)

Insert a lithium cell into one side of the socket (CN401). Push the lithium cell to insert the lithium cell into the socket.



3. Precautions for Reassembly

■ Installing the option board cover onto the chassis


Install the option board cover onto the chassis using the two screws.

Note:

Confirm that there is no foreign matters on the waterproof rib of the option board cover. (Wipe it clean when foreign matters adhere to it.)


■ Inserting the Volume and Channel switch into the chassis

Insert the volume and channel switch into the chassis with the VOL/CH FPC formed as shown in the figure.

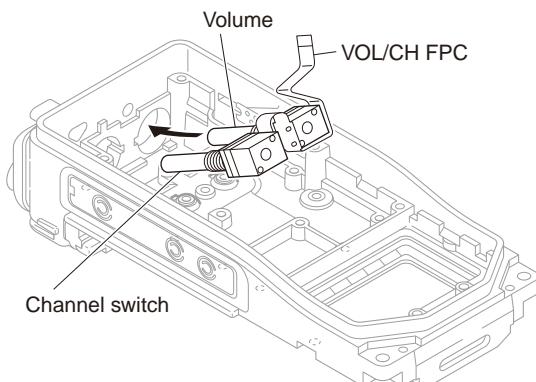

■ Forming the VOL/CH FPC, Cord ASSY and Universal connector FPC

Form the VOL/CH FPC, Cord ASSY and Universal connector FPC as shown in the figure.

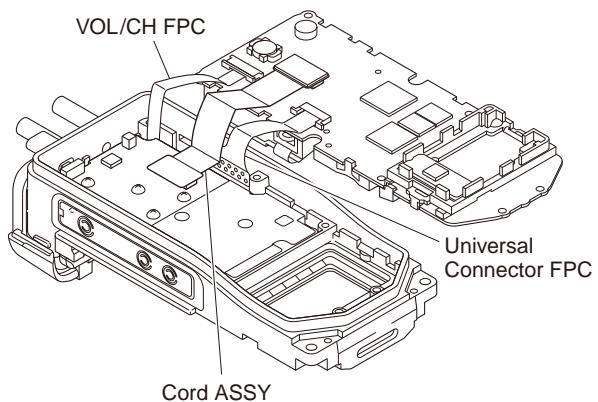


DISASSEMBLY FOR REPAIR

Note:


Fold indications are printed on the Cord ASSY and Universal Connector FPC.

"—" line shows creased line on the top.


"---" line shows creased line on the bottom.

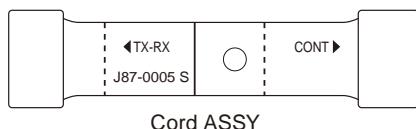


Cord ASSY



Universal Connector FPC

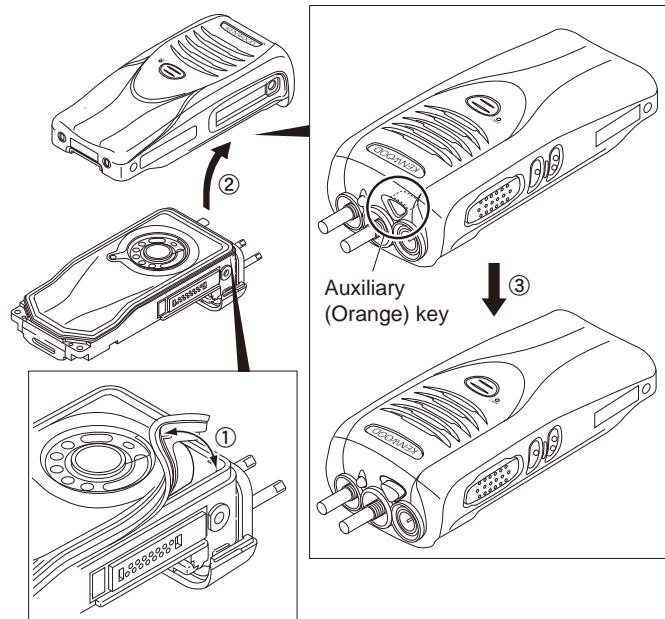

■ Mounting the chassis onto the case

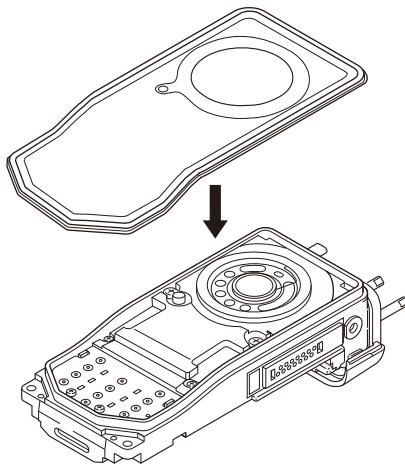

1. Place the packing on the chassis. Then, fit the chassis tightly into the groove of the packing ①.

Note:

Confirm that the entire groove of the packing fits to the chassis tightly.

2. Mount the chassis onto the case ②.



Note:

After mounting the chassis onto the case, the Auxiliary (Orange) key part of the VOL/CH packing gets stuck inside the case as shown in the figure, return it to the normal position using a soft tipped item (e.g., finger) ③.

Prying it with a pointed metal tool such as forceps, may damage the packing.

■ Relay hardware (E29-1221-14) installation procedure

1. Fit one side of the relay hardware to a right corner of the chassis using a pair of tweezers ①.
2. Fit the other side of the relay hardware to the rib of the chassis ②.

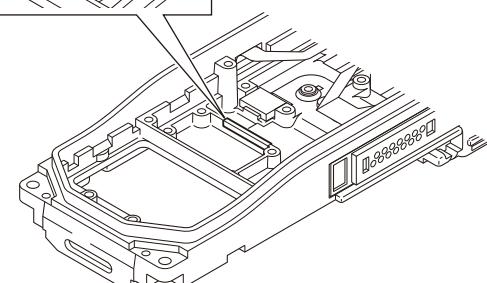

NX-200(S)

DISASSEMBLY FOR REPAIR

■ Assembly information (Sheet/Cushion)

When "Main Parts" is changed (ordered), "Assembled Sheet/Cushion" should also be changed (ordered) together.

The Sticker and Sheet etc are non-reusable parts. It requires the new one to get the radio's performance after repairs.

For example, when "Plastic Cabinet (A02-4116-03)" is changed, "Sticker (B42-7463-04)", "Badge (B43-1645-04)", "Fibrous Sheet (G10-1806-04)", "Fibrous Sheet (G10-1822-04)" and "Dressing Panel (A21-1664-03)" should be ordered and changed together because Sticker (B42-7463-04), Badge (B43-1645-04), Fibrous Sheet (G10-1806-04), Fibrous Sheet (G10-1822-04) and Dressing Panel (A21-1664-03) are non-reusable.

Main Parts		Assembled Sheet/ Cushion		
Part Name	Part Number	Part Name	Part Number	Remark
Plastic Cabinet	A02-4116-03	Sticker	B42-7463-04	"NXDN" is printed.
		Badge	B43-1645-04	"KENWOOD" is printed.
		Fibrous Sheet (SP)	G10-1806-04	
		Fibrous Sheet (MIC)	G10-1822-04	
		Dressing Panel	A21-1664-03	
Cord ASSY (50-pin FPC)	X42-3380-10	Cushion (50-pin FPC)	G13-2293-04	
Speaker	T07-0749-25	Rubber Cushion (SP)	G11-4272-14	
		Sheet (SP)	G11-4458-14	Used for stabilizing the waterproof performance. "●" (a hole) on the Sheet (SP) shows the upper side.
Switch Unit (PTT FPC)	X41-3760-10	Sheet (PTT)	G11-4428-04	Used for fixing the Push Knob (PTT) on the Switch Unit (PTT FPC) and stabilizing the waterproof performance.
		Adhesive Sheet (PTT FPC)	J99-0711-04	Used for fixing the Switch Unit (PTT FPC) on the Chassis.
Chassis	A10-4111-21	Relay Hardware (VCO-Chassis)	E29-1221-14	Used for stabilizing the shield performance of the VCO.
		Sheet (Air)	G11-4500-04	This sheet is put on the leak check hole. This sheet lets air through, but does not let water through.
		Rubber Sheet (FET)	G11-4429-04	Used for stabilizing the radiation performance of the FET.
		Sheet (Air)	G11-4440-04	This sheet is a protect cover of the sheet (G11-4500-04).
		Cushion (ANT)	G13-2220-04	Used for fixing the Terminal ASSY.
		Sheet (Chassis bottom)	G11-4538-04	2 pieces
Terminal Block	E72-0425-03	Adhesive Sheet (Terminal Block)	J99-0747-04	Used for fixing the Terminal Block and the Packing (Terminal Block).

CIRCUIT DESCRIPTION

1. Overview

The NX-200(S) is a VHF portable transceiver designed to operate in the frequency range of 136 to 174MHz. The unit consists of receiver, transmitter, phase-locked loop (PLL) frequency synthesizer, baseband parts, power supply, and control circuits.

2. Frequency Configuration

The receiver is a double-conversion superheterodyne using the first intermediate frequency (IF) of 58.05MHz and the second IF of 450kHz. Incoming signals from the antenna are mixed with the local signal from the PLL circuit to produce the first IF of 58.05MHz. This is then mixed with the 57.6MHz second local oscillator output to produce the 450kHz second IF. The transmit signal frequency is generated by the PLL VCO, and modulated by the signal from the DSP. It is then amplified and fed to the antenna.

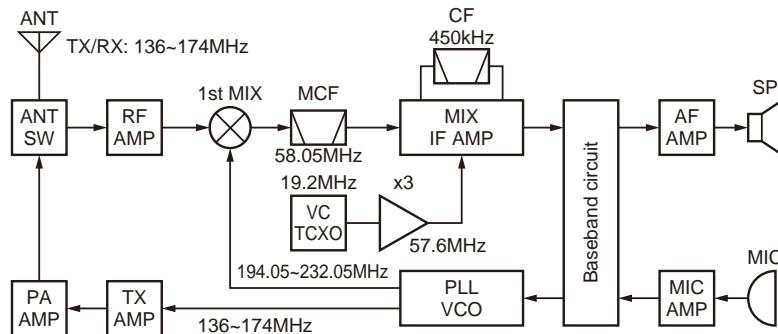


Fig. 1 Frequency configuration

3. Receiver System

3-1. RF Circuit

An incoming RF signal from the antenna terminal is passed through the antenna switch (D104, D105, D209 and D211) and then the bandpass filter (L220, L224). The bandpass filter is adjusted by a variable capacitor. The input voltage to the variable capacitor is regulated by the voltage output from the D/A converter (IC703). The signal is amplified by an RF amplifier (Q204), and passed through the bandpass filter (L210, L402). The resulting signal is applied to the first mixer (Q203), where it is mixed with the first local oscillator signal output from the frequency synthesizer to produce the first IF (58.05MHz).

3-2. IF Circuit

The first IF signal is passed through a four-pole monolithic crystal filter (XF200) to reject adjacent channel signals. The filtered first IF signal is amplified by the first IF amplifier (Q202) and then applied to the IF system IC (IC202). The IF system IC provides a second mixer, AGC amplifier, and RSSI (Received Signal Strength Indicator).

The second mixer mixes the first IF signal with the 57.6MHz of second local oscillator output and produces the second IF signal of 450kHz.

The second IF signal is passed through the ceramic filter (CF200) to reject the adjacent channel signal. The filtered second IF signal is amplified by the AGC amplifier.

The signal from the AGC amplifier is input to the ASIC (IC108) through the ceramic filter (CF201) and operational amplifier (IC203).

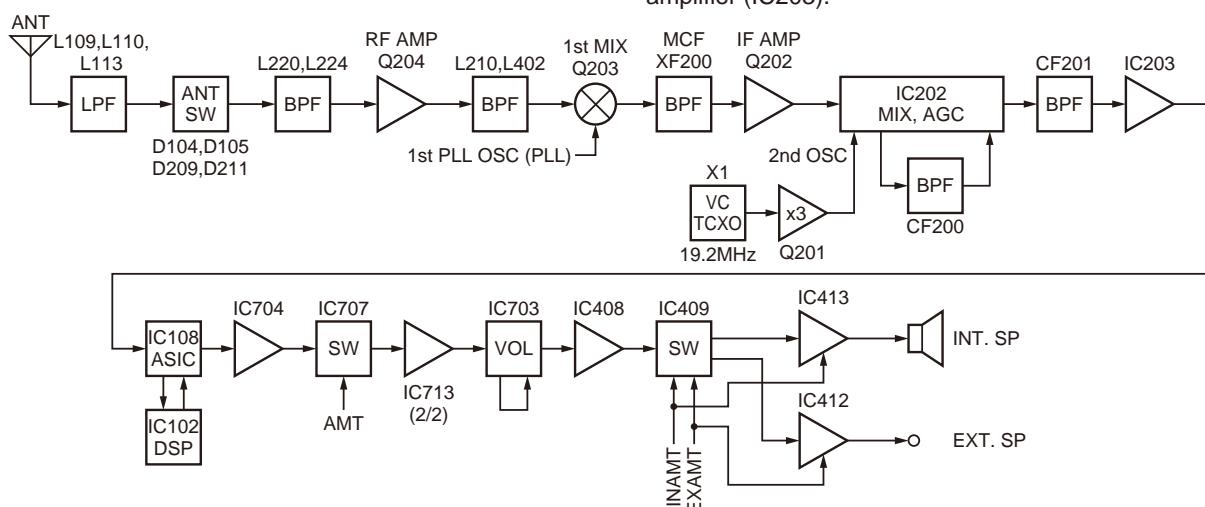


Fig. 2 RF and IF circuit

NX-200(S)

CIRCUIT DESCRIPTION

3-3. Audio Amplifier Circuit

Audio processing (high-pass filter, low-pass filter, de-emphasized and so on) at FM mode and decoding at NXDN mode are processed by DSP. The audio signal from IC108 and IC102 goes through the amplifier (IC704). The signal then goes through a mute switch (IC707), amplifier (IC713), electronic volume control (IC703), and AF amplifier (IC408).

While busy, AMT becomes Low to turn IC707 on, and the signal is fed to the AF switch. While INAMT is High, the AF switch (IC409) selects the internal speaker, and the audio signal is fed to the internal audio power amplifier (IC413), and output to the internal speaker. While EXAMT is High, the AF switch (IC409) selects the external speaker, and the audio signal is fed to the external audio power amplifier (IC412), and output to the external speaker. The power supply for IC413 and IC412 is turned on while INAMT or EXAMT is High.

The speaker is switched by the logic of the speaker switching terminal SSW on the universal connector. When the SP-MIC is not attached, SSW becomes High. IC108 detects the logic of SSW and activates either INAMT or EXAMT.

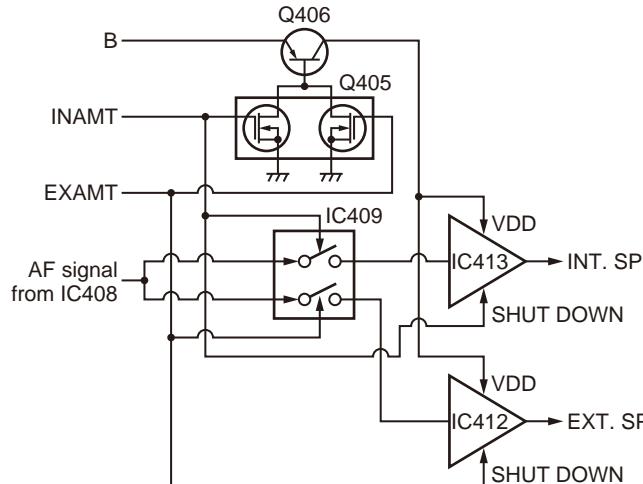


Fig. 3 Audio amplifier circuit

3-4. Squelch Circuit

It amplifies the demodulated noise signal from IC108 after filtering through the BPF circuit. Then, the amplified signal is converted to a DC signal by the detection circuit. The converted signal is fed back to IC108.

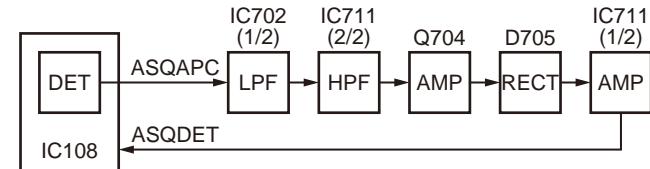


Fig. 4 Squelch circuit

4. Transmitter System

4-1. Audio Band Circuit

The signal from the internal microphone goes through the mute switch (Q5). When the SP-MIC is not attached, the microphone switching terminal (MSW) on the universal connector becomes High, and the mute switch (Q5) is turned on. When the SP-MIC is attached, MSW is connected to GND inside the SP-MIC. For this reason, Q5 is turned off, the internal microphone is muted, and only the input of the external microphone is supplied to the microphone amplifier. The signal from the microphone goes through the mute switch (Q707), and is amplified by IC716 (1/2) and limited by the AGC circuit which is composed of D703, D704, Q705 and Q706.

4-2. Baseband Circuit

The audio signal output from the baseband circuit is converted to digital data with a sampling frequency of 48kHz. This digital data is sent to the DSP (IC102), and voice signals of 300Hz or lower and frequencies of 3kHz or higher are cut off and an audio range of 300Hz to 3kHz is extracted. The audio signal is then pre-emphasized in FM mode and synthesized with the signals, such as QT and DQT, as required, and is then output from IC108. In Digital mode, the audio signal is converted to the 4-Level FSK baseband signal and output from IC108. The DTMF and MSK baseband signals are also generated by the DSP and output by IC108.

LPF (IC705) works as a smoothing filter. The DAC (IC703) assigns the baseband signal to the VCO and VCTCXO (X1). At this time, the level output according to the transmit carrier is fine-adjusted according to each modulation method.

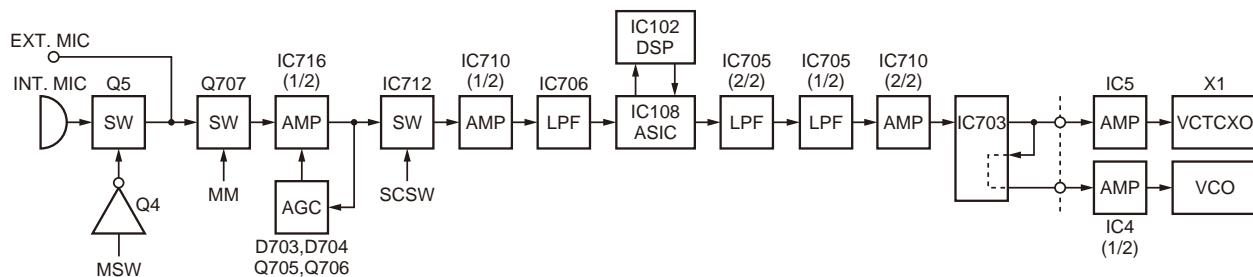


Fig. 5 Audio band and Baseband circuit

CIRCUIT DESCRIPTION

4-3. VOX

IC716 (2/2) amplifies the audio signal captured in the microphone. The signal is then converted into the DC voltage, rectified by D706. The DC voltage activates the ASIC (IC108), and the VOX starts.

4-4. Drive and Final Amplifier

The signal from the T/R switch (D100 is on) is amplified by the drive amplifier (Q102 and Q103) to 25~27dBm. The output of the drive amplifier is amplified by the RF power amplifier (Q106) to 5.0W (1W when the power is low). The RF power amplifier is MOS FET. The output of the RF power amplifier is then passed through the harmonic filter (LPF) and antenna switch (D104, D105 are on) and applied to the antenna terminal.

4-5. APC Circuit

The APC circuit always monitors the current flowing through the RF power amplifier (Q106) and keeps a constant current. The voltage drop at R136, R138 and R141 is caused by the current flowing through the RF power amplifier and this voltage is applied to the differential amplifier (IC100 1/2). IC100 (2/2) compares the output voltage of IC100 (1/2) with the reference voltage from IC108, and the output of IC100 (2/2) controls the VGG of Q102, Q103 and Q106 to make the both voltages the same. The change of power high/low is carried out by the change of the reference voltage. Q105, Q107 and Q110 are turned on and Q104 and Q109 are turned off in transmit and the APC circuit is active.

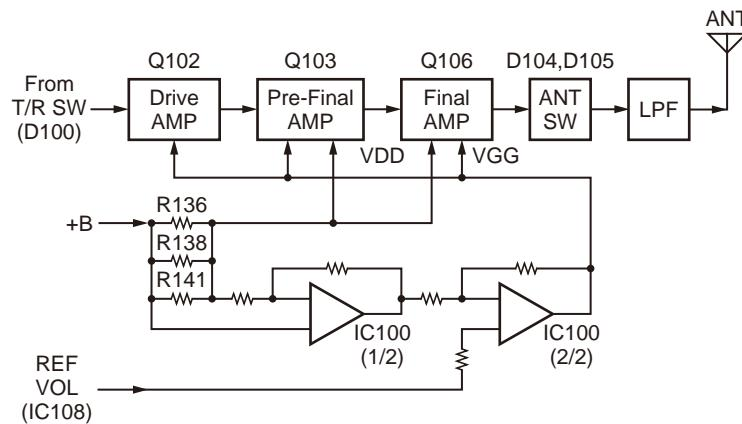


Fig. 6 Drive and final amplifier and APC circuit

5. PLL Frequency Synthesizer

5-1. VCTCXO (X1)

VCTCXO (X1) generates a reference frequency of 19.2MHz for the PLL frequency synthesizer. This reference frequency is applied to pin 9 of the PLL IC (IC3) and is connected to the IF circuit as a 2nd local signal through the Tripler (Q201). The VCTCXO oscillation frequency is determined by the DC voltage of the VC terminal. The VC voltage is fixed to 1.65V by R59 and R60, and supplied to the VC terminal through IC5. The modulation signal is also fed to VC terminal through IC5.

The frequency adjustment is achieved by switching the ratio of dividing frequency that is not adjusted by the DC voltage impressed to VC. The resolution of the adjusting frequency is approximately 8Hz. Because twice the VCO output are input for the input frequency of PLL IC, the sending and receiving frequency can be adjusted by approximately 4Hz resolution.

5-2. VCO

There is a RX VCO and a TX VCO.

The TX VCO (Q10) generates a transmit carrier and the RX VCO (Q8) generates a 1st local signal. For the VCO oscillation frequency, the transmit carrier is 136 to 174 MHz and the 1st local receive signal is 194.05 to 232.05MHz.

The VCO oscillation frequency is determined by one system of operation switching terminal "T/R" and two systems of voltage control terminals "CV" and "ASSIST".

The operation switching terminal, "T/R", is controlled by the control line (/T_R) output from the ASIC (IC108). When the /T_R logic is low, the VCO outputs the transmit carrier and when it is high, it outputs a 1st local receive signal.

The voltage control terminals, "CV" and "ASSIST", are controlled by the PLL IC (IC3) and ASIC (IC108) and the output frequency changes continuously according to the applied voltage. For the modulation input terminal, "VCO_MOD", the output frequency changes according to the applied voltage. This is used to modulate the VCO output. "VCO_MOD" works only when "/T_R" is low.

NX-200(S)

CIRCUIT DESCRIPTION

5-3. PLL IC (IC3)

The PLL IC compares the differences in phases of the VCO oscillation frequency and the VCTCXO reference frequency, returns the difference to the VCO CV terminal and realizes the "Phase Locked Loop" for the return control. This allows the VCO oscillation frequency to accurately match (lock) the desired frequency.

When the frequency is controlled by the PLL, the frequency convergence time increases as the frequency difference increases when the set frequency is changed. To supplement this, the ASIC is used before control by the PLL IC to bring the VCO oscillation frequency close to the desired frequency. As a result, the VCO CV voltage does not change and is always stable at approximately 2.5V.

The desired frequency is set for the PLL IC by the ASIC (IC108) through the 3-line "SDO1", "SCK1", "/PCS_RF" serial bus. Whether the PLL IC is locked or not is monitored by the ASIC through the "PLD" signal line. If the VCO is not the desired frequency (unlock), the "PLD" logic is low.

5-4. Doubler (Q4)

The doubler (Q4) extracts the twice harmonic component from the signal from the VCO. This twice harmonic components is then fed into PLL (IC3) through band pass filter.

Band pass filter is consists of two filter. One is for TX (L3,L5,L7) and pass band is 272.0 to 348.0MHz. The other is for RX 1st local (L2,L6,L30) and pass band is 388.1 to 464.1MHz.

5-5. Local Switch (D100, D201)

The connection destination of the signal output from the buffer amplifier (Q100) is changed with the diode switch (D100) that is controlled by the transmission power supply, 50T, and the diode switch (D201) that is controlled by the receive power supply, 50R. If the 50T logic is high, it is connected to a send-side pre-drive (Q102). If the 50T logic is low, it is connected to a receive-side mixer (Q203).

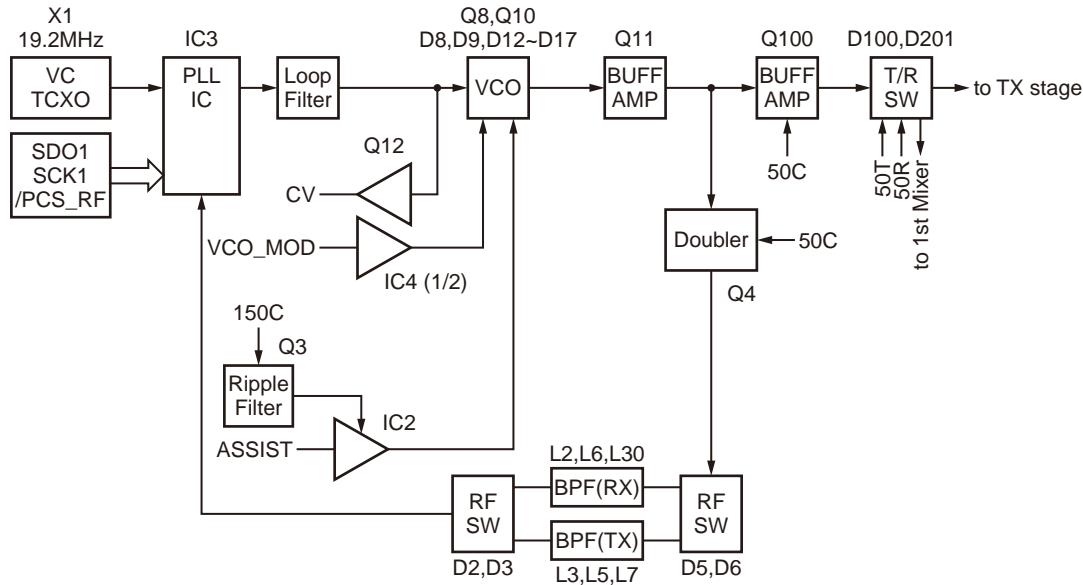


Fig. 7 PLL block diagram

6. Control Circuit

The control circuit consists of the ASIC (IC108) and its peripheral circuits. IC108 mainly performs the following;

- 1) Switching between transmission and reception by PTT signal input.
- 2) Reading system, zone, frequency, and program data from the memory circuit.
- 3) Sending frequency program data to the PLL.
- 4) Controlling squelch on/off by the DC voltage from the squelch circuit.
- 5) Controlling the audio mute circuit by decode data input.

6-1. ASIC

The ASIC (IC108) is a 32-bit RISC processor, equipped with peripheral function and ADC/DAC.

This ASIC operates at 18.432MHz clock and 3.3V /1.5V DC. It controls the flash memory, SRAM, DSP, the receive circuit, the transmitter circuit, and the control circuit and transfers data to or from an external device.

CIRCUIT DESCRIPTION

6-2. Memory Circuit

The memory circuit consists of the ASIC (IC108) and the SRAM (IC103) and flash memory (IC101). The flash memory has capacity of 32M-bit that contains the transceiver control program for the ASIC and stores the data. It also stores the data for transceiver channels and operating parameter that are written by the FPU. This program can be easily written from external devices. The SRAM has capacity of 1M-bit that contains work area and data area.

■ Flash memory

Note: The flash memory stores the data that is written by the FPU (KPG-111D), tuning data (Deviation, Squelch, etc.) ,and firmware program (User mode, Test mode, Tuning mode, etc.). This data must be rewritten when replacing the flash memory.

■ SRAM (Static memory)

Note: The SRAM has temporary data area and work area. When the power supply is off, it is backed up by an internal secondary lithium battery. Therefore, the saved data is not lost.

6-3. Key Detection Circuit

Keys are detected using the key scan circuit in IC108. The /KEYI* signals that are normally pulled down go high when any key is pressed.

6-4. Low Battery Warning

The battery voltage is divided using R444 and R445 and is detected by the ASIC (IC108). When the battery voltage falls below the voltage set by the Low battery warning adjustment, the red LED blinks to notify the operator that it is time to replace the battery. If the battery voltage falls even more (approx. 5.8V), a beep sounds and transmission stops.

Low battery warning	Battery condition
The red LED blinks during transmission.	The battery voltage is low but the transceiver is still usable.
The red LED blinks and the warning tone beeps while the PTT switch is pressed.	The battery voltage is low and the transceiver is not usable to make calls.

6-5. DSP

The DSP circuit consists of a DSP (IC102) and processes the baseband signal. The DSP operates on an external clock of 18.432MHz (the same as the IC108), the I/O section operates at 3.3V and the core section operates at 1.5V. The DSP carries out the following processes:

- 4 Level FSK processing
- Analog FM pre-emphasis/de-emphasis
- Vocoder processing between audio codec and modulation/demodulation
- CAI processing, such as error correction encoding
- QT/DQT encoding/decoding
- LTR encoding/decoding
- DTMF encoding/decoding
- MSK encoding/decoding
- 2-tone encoding/decoding
- Compressor/expander processing
- Voice scrambler processing
- Transmit/receive audio filtering processing
- Microphone amplifier AGC processing
- Audio mute processing
- Modulation level processing

7. Power Supply Circuit

The battery voltage (+B) is provided from the battery terminal on the TX/RX unit (X57). The battery voltage passes through the 2.5A fuse (F400), and goes to the RF final amplifier, AVR ICs (IC400, IC403), and Control unit (X53-443).

In the control unit, +B is connected to the DC/DC (IC407), AVR ICs (IC411, IC708, IC416), and voltage detector IC (IC414). The voltage detector watches the battery voltage. If the battery voltage is 5.6V or higher, the detector outputs High. While the output of IC414 is High, IC416 and Q409 provide 3.1V (31BU) to the backup-section.

When the VOL SW is turned on, SB1 becomes high (battery voltage). The DC/DC (IC407) operates if both SB1 and the output of the detector are high. IC407 outputs 3.8V and it activates IC404 (33M), IC717 (15M), and IC406 (33A). As a result, the ASIC and DSP operate.

The SBC signal becomes High after the ASIC operates, IC708 (5A), Q403 on the Control unit (SB2) and Q403 on the TX-RX unit (SB3) are turned on. IC402 and IC403 operate by turning on these AVR ICs and FET switches.

The 5UC signal becomes High when an option is installed on the universal connector. Then IC411 (50U) operates.

When the /SAVE signal becomes High, IC400 (50C) operates. The output of IC400 is connected to three FET switches (Q401, Q402, Q405). When the SBC signal becomes High, IC403 (33C) operates. The FET switches are controlled by the ASIC. Q405 (50T) is turned on in transmit mode. Q401 (50R) and Q402 (50IF) are turned on in receive mode.

When the VOL SW is turned off, the /PSW signal becomes Low. After detecting the /PSW signal, the ASIC changes the SBC signal to Low. Then the power supplies except IC416 (31BU) stop.

NX-200(S)

CIRCUIT DESCRIPTION

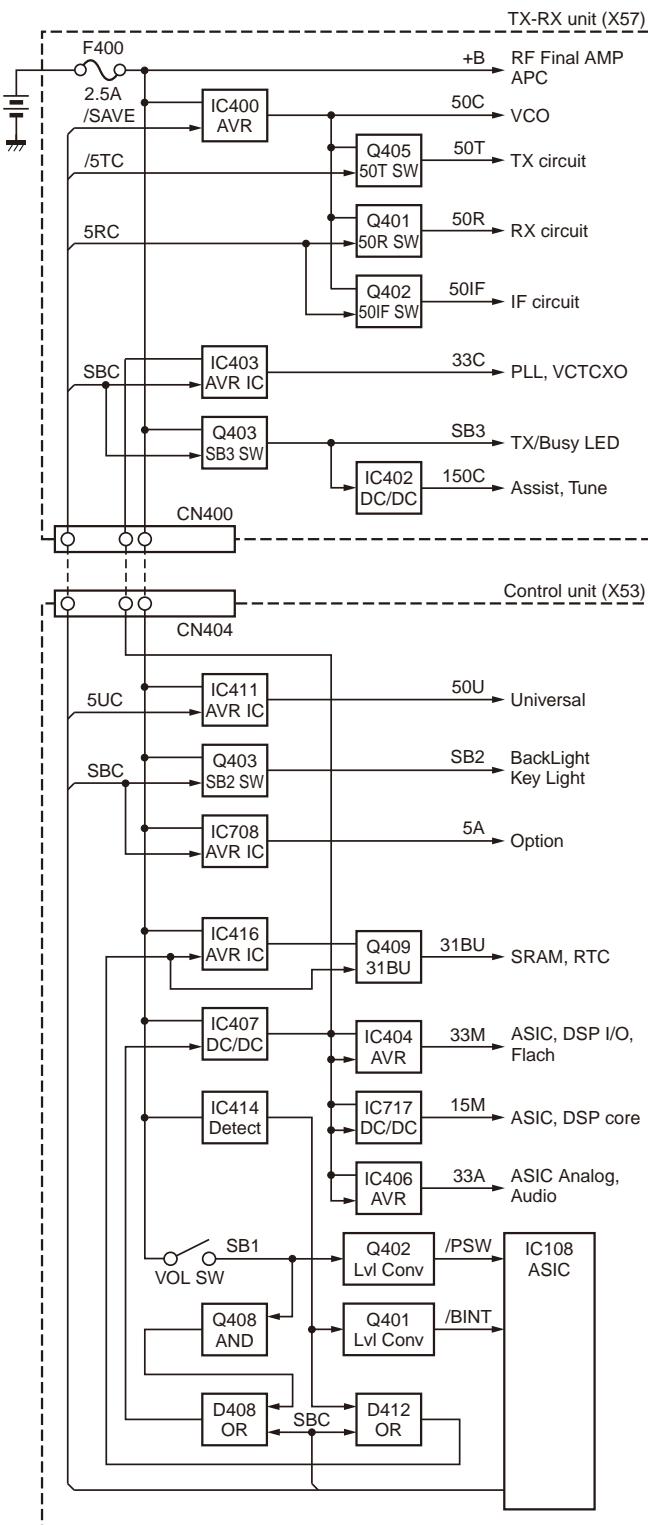


Fig. 8 Power supply circuit

8. Signaling Circuit

8-1. Encode (QT/DQT/LTR/DTMF/2-tone/MSK)

Each signaling data signal of QT, DQT, LTR, DTMF, 2-tone and MSK is generated by the DSP circuit, superposed on a modulation signal and output from IC108. The modulation balance of the QT/DQT/LTR signal is adjusted by the D/A converter(IC703) and the resulting signal is routed to the modulation input of the VCO and VCXO (X1). Each deviation of the TX QT, DQT, LTR, DTMF, 2-tone and MSK tone is adjusted by changing the output level of IC108 and the resulting signal is routed to the VCO and VCXO. The RX DTMF tone is routed to the receive audio signal system, and is output from the speaker.

8-2. Decode (QT/DQT/LTR/DTMF/2-tone/MSK)

The audio signal is removed from the FM detection signal sent to the DSP circuit and the resulting signal is decoded.

9. Comander Circuit

The term “comander” means compressor and expander. The comander reduces noise by utilizing a compressor and an expander. The transceiver contains a DSP (IC102) to perform this operation. The transceiver comander can be turned on or off using the FPU.

COMPONENTS DESCRIPTION

Control unit (X53-4432-75)

Ref. No.	Part Name	Description
IC101	IC	Flash memory
IC102	IC	DSP
IC103	IC	SRAM
IC104	IC	2 input AND gate
IC105	IC	Reset
IC106	IC	RTC
IC107	IC	Buffer
IC108	IC	ASIC
IC109	IC	2 input AND gate
IC404	IC	Voltage regulator (33M)
IC406	IC	Voltage regulator (33A)
IC407	IC	DC/DC converter
IC408	IC	AF AMP
IC409	IC	AF switch
IC411	IC	Voltage regulator (50U)
IC412,413	IC	Audio AMP
IC414	IC	Reset
IC415	IC	2 input AND gate
IC416	IC	Voltage regulator
IC417,418	IC	Dual bus buffer
IC701	IC	I/O control
IC702	IC	APC LPF
IC703	IC	D/A converter
IC704	IC	RX AF LPF
IC705	IC	Modulation LPF
IC706	IC	MIC AMP
IC707	IC	RX AF switch
IC708	IC	Voltage regulator (5A)
IC709	IC	Sidetone mute
IC710	IC	MOD/MIC summing AMP
IC711	IC	SQL BPF/SQL DC AMP
IC712	IC	MIC switch
IC713	IC	1.65V REF/RX summing AMP
IC714	IC	OPT switch
IC715,716	IC	VOX AMP
IC717	IC	DC/DC converter (15M)
Q4	FET	MIC mute control
Q5	FET	MIC mute switch
Q401,402	FET	Level converter
Q403	Transistor	SB2 switch
Q404	FET	SB2 switch control
Q405	FET	AF AMP switch
Q406,407	Transistor	Voltage regulator (AF AMP)

Ref. No.	Part Name	Description
Q408,409	Transistor	DC switch
Q410	FET	DC switch
Q411	FET	Level converter
Q412	FET	DC switch control
Q413~415	Transistor	DC switch
Q702	FET	Tone switch
Q703	FET	W/N noise switch
Q704	Transistor	SQL noise AMP
Q705,706	Transistor	MIC AGC
Q707	FET	MIC mute
D12~16	Diode	Reverse current prevention
D17~21	Zener diode	Surge absorption
D22,23	Diode	Surge absorption
D102	Diode	Reverse current prevention
D404	Diode	Key control
D405,406	Diode	DC/DC converter
D407	Diode	Over voltage prevention
D408	Diode	DC/DC converter control
D409,410	Diode	SP control
D411	Diode	RTC BATT control
D412	Diode	DC switch control
D413	Diode	RTC BATT control
D414,415	Diode	Reverse current prevention
D416	Diode	33M control
D417	Diode	33A control
D701	Diode	5A switch
D702	Diode	PLD control
D703,704	Diode	Detector
D705	Diode	Noise detector
D706	Diode	VOX detector
D707	Diode	VOX

NX-200(S)

COMPONENTS DESCRIPTION

TX-RX unit (X57-7820-10)

Ref. No.	Part Name	Description
IC1	IC	Temperature sensor
IC2	IC	AF AMP for VCO tune
IC3	IC	PLL IC
IC4	IC	OP AMP (VCO MOD/APC)
IC5	IC	DC AMP for TCXO MOD
IC100	IC	Auto power control
IC200,201	IC	DC AMP for BPF
IC202	IC	FM IC
IC203	IC	Buffer
IC400	IC	Voltage regulator (50C)
IC401	IC	50T control
IC402	IC	DC/DC converter
IC403	IC	Voltage regulator (33C)
IC404	IC	OP AMP (RSSI/VAGC)
Q1,2	Transistor	Buffer AMP switch
Q3	Transistor	Ripple filter
Q4	Transistor	Buffer AMP
Q6	Transistor	Ripple filter
Q7	FET	T/R switch
Q8,10	FET	VCO oscillation
Q9	FET	T/R switch
Q11	Transistor	Buffer AMP
Q12	FET	Buffer AMP
Q13	FET	Buffer AMP switch
Q100	Transistor	Buffer AMP
Q102	FET	Drive AMP
Q103	FET	Pre-final AMP
Q104,105	Transistor	APC switch
Q106	FET	RF final AMP
Q107,109	FET	APC switch
Q110	Transistor	APC switch
Q201	Transistor	2nd Local tripler

Ref. No.	Part Name	Description
Q202	Transistor	IF AMP
Q203	FET	Mixer
Q204	FET	RF AMP
Q401	FET	50R switch
Q402	FET	50IF switch
Q403	FET	SB3 switch
Q404	FET	DC/DC converter switch
Q405	Transistor	50T switch
Q406	Transistor	TX/RX LED switch
D1	Diode	Ripple filter
D2,3	Diode	fin RF switch
D4	Diode	Bypass diode
D5,6	Diode	fin RF switch
D7	Diode	Ripple filter
D8,9 D12~17	Variable capacitance diode	Frequency control
D18	Variable capacitance diode	TX modulation
D100	Diode	Local switch
D103	Zener diode	APC switch
D104,105	Diode	Antenna switch
D106	Zener diode	APC protect
D201	Diode	Local switch
D204,205, D207,208	Variable capacitance diode	Vari-cap tune
D209	Diode	Antenna switch
D211	Diode	Antenna switch
D213	Diode	Reverse protection
D400	Diode	Reverse protection
D401	Diode	50T control
D402	LED	TX/RX LED
D403	Diode	Reverse protection

PARTS LIST

CAPACITORS

C	C	4	5	T	H	1	H	2	2	0	J
1	2	3	4	5	6						

1 = Type ... ceramic, electrolytic, etc.


4 = Voltage rating

2 = Shape ... round, square, etc.

5 = Value

3 = Temp. coefficient

6 = Tolerance



• Capacitor value

010 = 1pF

100 = 10pF

101 = 100pF

102 = 1000pF = 0.001μF

103 = 0.01μF

2 2 0 = 22pF

Multiplier

2nd number
1st number

• Temperature coefficient

1st Word	C	L	P	R	S	T	U
Color*	Black	Red	Orange	Yellow	Green	Blue	Violet
ppm/°C	0	-80	-150	-220	-330	-470	-750

2nd Word	G	H	J	K	L
ppm/°C	±30	±60	±120	±250	±500

Example : CC45TH = -470±60ppm/°C

• Tolerance (More than 10pF)

Code	C	D	G	J	K	M	X	Z	P	No code
(%)	±0.25	±0.5	±2	±5	±10	±20	+40 -20	+80 -20	+100 -0	More than 10pF : -10~+50

(Less than 10pF)

Code	B	C	D	F	G
(pF)	±0.1	±0.25	±0.5	±1	±2

• Voltage rating

1st word \ 2nd word	A	B	C	D	E	F	G	H	J	K	V
0	1.0	1.25	1.6	2.0	2.5	3.15	4.0	5.0	6.3	8.0	-
1	10	12.5	16	20	25	31.5	40	50	63	80	35
2	100	125	160	200	250	315	400	500	630	800	-
3	1000	1250	1600	2000	2500	2150	4000	5000	6300	8000	-

• Chip capacitors

(EX) C C 7 3 F S L 1 H 0 0 0 J
 1 2 3 4 5 6 7

Refer to the table above.
 1 = Type
 2 = Shape
 3 = Dimension
 4 = Temp. coefficient
 5 = Voltage rating
 6 = Value
 7 = Tolerance


(Chip) (CH, RH, UJ, SL)

(EX) C K 7 3 F F 1 H 0 0 0 Z
 1 2 3 4 5 6 7

4 = Temp. coefficient
 5 = Voltage rating
 6 = Value
 7 = Tolerance

(Chip) (B, F)

• Dimension



RESISTORS

• Chip resistor (Carbon)

(EX) R D 7 3 E B 2 B 0 0 0 J
 1 2 3 4 5 6 7

(Chip) (B, F)

• Carbon resistor (Normal type)

(EX) R D 1 4 B B 2 C 0 0 0 J
 1 2 3 4 5 6 7

1 = Type

5 = Rating wattage

2 = Shape

6 = Value

3 = Dimension

7 = Tolerance

4 = Temp. coefficient

Chip capacitor

Code	L	W	T
Empty	5.6±0.5	5.0±0.5	Less than 2.0
A	4.5±0.5	3.2±0.4	Less than 2.0
B	4.5±0.5	2.0±0.3	Less than 2.0
C	4.5±0.5	1.25±0.2	Less than 1.25
D	3.2±0.4	2.5±0.3	Less than 1.5
E	3.2±0.2	1.6±0.2	Less than 1.25
F	2.0±0.3	1.25±0.2	Less than 1.25
G	1.6±0.2	0.8±0.2	Less than 1.0
H	1.0±0.05	0.5±0.05	0.5±0.05

Chip resistor

Code	L	W	T
E	3.2±0.2	1.6±0.2	1.0
F	2.0±0.3	1.25±0.2	1.0
G	1.6±0.2	0.8±0.2	0.5±0.1
H	1.0±0.05	0.5±0.05	0.35±0.05

• Rating wattage

Code	Wattage	Code	Wattage	Code	Wattage
1J	1/16W	2C	1/6W	3A	1W
2A	1/10W	2E	1/4W	3D	2W
2B	1/8W	2H	1/2W		

NX-200(S)

PARTS LIST

* New Parts. \triangle indicates safety critical components.

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

NX-200(S)

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
NX-200(S)					
1	1A		A02-4116-03	PLASTIC CABINET	
2	3A		A10-4111-21	CHASSIS	
3	1A		A21-1664-03	DRESSING PANEL	
4	2B		A62-1156-02	PANEL(TOP)	
6	1B,1D	B09-0712-03	CAP	ACCESSORY	
9	3B	B11-1855-04	ILLUMINATION GUIDE(TX/BUSY)		
12	1A	B42-7463-04	STICKER(NEXEDGE)		
13	1B	B43-1645-04	BADGE(KENWOOD)		
14	2D	*	B62-2368-00	INSTRUCTION MANUAL	
16	2A	CC73GCH1H101J	CHIP C	100PF J	
17	2B	D32-0446-14	STOPPER(16CH)		
19	2A	E29-1220-04	RELAY HARDWARE(VCO-PCB)		
20	3A	E29-1221-14	RELAY HARDWARE(VCO-CHASSIS)		
21	3B	E58-0532-05	RECTANGULAR RECEPTACLE(SP/MIC)		
22	3B	E72-0425-03	TERMINAL BLOCK		
24	3A	F07-1931-04	COVER(OP BOARD)		
25	1A	G10-1806-04	FIBROUS SHEET(SP)		
26	2B	G10-1807-04	FIBROUS SHEET(TOP PANEL)		
27	1A	G10-1822-04	FIBROUS SHEET(ECM)		
30	2A	G11-4272-14	RUBBER CUSHION(SP)		
33	2A	G11-4428-04	SHEET(PTT)		
34	3A	G11-4429-04	RUBBER SHEET(FET)		
35	3A	G11-4440-04	SHEET(AIR)		
36	2A	G11-4458-14	SHEET(SP)		
37	2A	G11-4459-04	SHEET(TX-RX PCB)		
38	3A	G11-4500-04	SHEET(AIR)		
39	3A	G11-4538-04	SHEET(CHASSIS)		
40	2A,3B	G13-2220-04	CUSHION(ANT/OP BOARD)		
41	2A	G13-2249-04	CUSHION(TX-RX PCB)		
42	2A	G13-2292-04	CUSHION(TX-RX PCB)		
43	2A	G13-2293-04	CUSHION(50PIN FPC)		
46	2B	G53-1762-02	PACKING(TOP)		
47	3B	G53-1763-03	PACKING(TERMINAL BLOCK)		
48	3A	G53-1764-03	PACKING(OP BOARD)		
49	2B	G53-1768-04	PACKING(VOL,SELECTOR O-RING)		
50	1B,1D	G53-1769-04	PACKING(CAP)	ACCESSORY	
51	1A	G53-1824-01	PACKING		
53	1D,2D	*	H12-4293-02	PACKING FIXTURE	
54	2D		H13-2135-04	CARTON BOARD	
55	3C	*	H52-2326-12	ITEM CARTON CASE	
57	2B	J19-5506-03	HOLDER(VOL,SELECTOR)		
58	2A	J19-5507-02	HOLDER(OP BOARD)		
59	2A	J19-5539-01	HOLDER(SP)		
60	1C	J29-0730-05	BELT CLIP	ACCESSORY	
62	2B	J30-1296-04	SPACER(VOL)		
65	3B	J87-0007-25	FPC(LEAD FREE/UNIVERSAL)		
66	2B	J87-0028-05	FPC(LEAD FREE/VOL,SELECTOR)		
67	2A	J87-0037-05	FPC(LEAD FREE/ECM,SP)		
68	3A	J99-0711-04	ADHESIVE SHEET(PTT FPC)		
69	2A	J99-0714-04	ADHESIVE SHEET(TX-RX PCB)		

L : Scandinavia

Y : PX (Far East, Hawaii)

C : China

K : USA

T : England

X : Australia

P : Canada

E : Europe

M : Other Areas

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
70	3B		J99-0715-08	ADHESIVE SHEET(UNIVERSAL)	
72	3B		J99-0747-04	ADHESIVE SHEET(TERMINAL BLOCK)	
77	3A		K25-2001-03	PUSH KNOB(PTT)	
78	1A		K29-9405-03	KNOB(PTT)	
79	1A		K29-9406-03	BUTTON KNOB(SIDE KEY)	
80	1B		K29-9407-03	KNOB(VOL)	
81	1B		K29-9408-13	KNOB(SELECTOR)	
A	1B,1D		N08-0564-04	DRESSED SCREW ACCESSORY	
B	3B		N09-2426-14	HEXAGON HEAD SCREW(BATT-)	
C	3A		N09-2440-15	SPECIAL SCREW(CASE/CHASSIS)	
D	2A,2B		N09-6549-04	STEPPED SCREW(FG-SP HOLDER)	
E	2B,3A		N09-6554-05	PAN HEAD SCREW(ANT/OP BOARD)	
F	1C		N09-6585-05	PAN HEAD MACHINE SCREW(BELT CLIP)	
G	2B		N14-0844-04	CIRCULAR NUT(VOL,SELECTOR)	
H	1A,2A,2B		N83-2005-48	PAN HEAD TAPTITE SCREW(PCB)	
VR1	2B		R31-0666-05	VARIABLE RESISTOR(VOL)	
S1	2B		S60-0437-05	ROTARY SWITCH(SELECTOR)	
85	2A		T07-0749-25	SPEAKER	
86	2A		T91-0579-05	MIC ELEMENT	
88	2A		W09-0971-05	LITHIUM CELL	
90	3A		X41-3760-10	SWITCH UNIT(PTT FPC)	
92	2A		X42-3380-10	CORD ASSY(50PIN FPC)	
-			X53-4432-77	SERVICE CONTROL UNIT	
93	2B		X60-3910-10	TERMINAL ASSY(SMA)	
CONTROL UNIT (X53-4432-75)					
C13 -15			CK73HB1H471K	CHIP C	470PF K
C16 ,17			CC73HCH1H101J	CHIP C	100PF J
C23			CK73HB1H102K	CHIP C	1000PF K
C24			CC73HCH1H470J	CHIP C	47PF J
C25 -27			CK73HB1H102K	CHIP C	1000PF K
C28 -34			CC73HCH1H101J	CHIP C	100PF J
C35			CK73HB1H102K	CHIP C	1000PF K
C36			CK73HB1E682K	CHIP C	6800PF K
C37			CK73HB1H102K	CHIP C	1000PF K
C38			CC73HCH1H101J	CHIP C	100PF J
C101-104			CK73HB1A104K	CHIP C	0.10UF K
C105			CK73HB0J105K	CHIP C	1.0UF K
C106			CK73HB1E103K	CHIP C	0.010UF K
C107			CK73HB1A104K	CHIP C	0.10UF K
C109,110			CK73HB1H102K	CHIP C	1000PF K
C111-113			CK73HB1A104K	CHIP C	0.10UF K
C116,117			CK73HB1A104K	CHIP C	0.10UF K
C118,119			CK73HB0J105K	CHIP C	1.0UF K
C120,121			CK73HB1A104K	CHIP C	0.10UF K
C122-124			CK73HB1E103K	CHIP C	0.010UF K
C130			CK73HB1E103K	CHIP C	0.010UF K
C131			CK73HB1A104K	CHIP C	0.10UF K
C133			CS7CP0J100M	CHIP TNTL	10UF 6.3WV
C134			CK73HB1E103K	CHIP C	0.010UF K
C135			CK73HB1H102K	CHIP C	1000PF K

PARTS LIST

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description			Desti-nation	Ref. No.	Address	New parts	Parts No.	Description			Desti-nation
C136			CK73HB1E103K	CHIP C	0.010UF	K		C709			CK73HB0J105K	CHIP C	1.0UF	K	
C137			CK73GB1E105K	CHIP C	1.0UF	K		C710			CK73HB1E103K	CHIP C	0.010UF	K	
C138-140			CK73HB1A104K	CHIP C	0.10UF	K		C711			CK73HB1A104K	CHIP C	0.10UF	K	
C141			CC73HCH1H101J	CHIP C	100PF	J		C712			CK73HB1E103K	CHIP C	0.010UF	K	
C142			CS77CP0J100M	CHIP TNTL	10UF	6.3WV		C713			CK73HB1H332K	CHIP C	3300PF	K	
C143			CK73HB1E103K	CHIP C	0.010UF	K		C714			CK73HB1H122K	CHIP C	1200PF	K	
C144			CK73GB1E105K	CHIP C	1.0UF	K		C715			CK73HB1A104K	CHIP C	0.10UF	K	
C145-148			CK73HB1A104K	CHIP C	0.10UF	K		C716			CK73HB1H681K	CHIP C	680PF	K	
C149			CK73HB1E103K	CHIP C	0.010UF	K		C717			CK73HB1E103K	CHIP C	0.010UF	K	
C150			CK73GB1E105K	CHIP C	1.0UF	K		C718			CK73HB1H152K	CHIP C	1500PF	K	
C151-155			CK73HB1A104K	CHIP C	0.10UF	K		C720			CK73HB1E103K	CHIP C	0.010UF	K	
C156,157			CK73HB1H102K	CHIP C	1000PF	K		C721			CK73HB1A104K	CHIP C	0.10UF	K	
C158			CK73HB1E103K	CHIP C	0.010UF	K		C722			CK73HB1E103K	CHIP C	0.010UF	K	
C159			CK73HB1A104K	CHIP C	0.10UF	K		C723			CK73HB1A104K	CHIP C	0.10UF	K	
C160,161			CK73HB1E682K	CHIP C	6800PF	K		C724			CK73HB1E103K	CHIP C	0.010UF	K	
C409			CK73HB0J105K	CHIP C	1.0UF	K		C725			CC73HCH1E181J	CHIP C	180PF	J	
C411,412			CK73HB0J105K	CHIP C	1.0UF	K		C726,727			CK73HB1A104K	CHIP C	0.10UF	K	
C414			CK73HB0J105K	CHIP C	1.0UF	K		C728			CK73HB1H331K	CHIP C	330PF	K	
C415			CS77CP1A100M	CHIP TNTL	10UF	10WV		C730			CK73HB1H331K	CHIP C	330PF	K	
C416			CK73FB1A106K	CHIP C	10UF	K		C731,732			CK73HB1E103K	CHIP C	0.010UF	K	
C417			CC73HCH1H221J	CHIP C	220PF	J		C734			CK73HB1H102K	CHIP C	1000PF	K	
C418			CK73HB1E103K	CHIP C	0.010UF	K		C735			CK73HB1H122K	CHIP C	1200PF	K	
C419			CK73FB1E475K	CHIP C	4.7UF	K		C736,737			CK73HB1A104K	CHIP C	0.10UF	K	
C420			CK73HB1E103K	CHIP C	0.010UF	K		C738			CK73HB1H102K	CHIP C	1000PF	K	
C421			CK73HB1E682K	CHIP C	6800PF	K		C739			CK73HB1E682K	CHIP C	6800PF	K	
C422			CC73HCH1H100C	CHIP C	10PF	C		C740			CK73HB1H102K	CHIP C	1000PF	K	
C424,425			CK73HB1A104K	CHIP C	0.10UF	K		C742			CK73GB1E105K	CHIP C	1.0UF	K	
C427			CK73HB1E103K	CHIP C	0.010UF	K		C743			CK73HB0J105K	CHIP C	1.0UF	K	
C428			CC73HCH1H030C	CHIP C	3.0PF	C		C744-746			CK73HB1E103K	CHIP C	0.010UF	K	
C429,430			CK73HB1A104K	CHIP C	0.10UF	K		C747,748			CK73HB1A104K	CHIP C	0.10UF	K	
C431			CK73FB1A106K	CHIP C	10UF	K		C749,750			CC73HCH1H470J	CHIP C	47PF	J	
C433			CK73FB1A106K	CHIP C	10UF	K		C751			CK73GB1E105K	CHIP C	1.0UF	K	
C435-438			CK73HB1A563K	CHIP C	0.056UF	K		C752,753			CC73HCH1H101J	CHIP C	100PF	J	
C439,440			CK73HB1A104K	CHIP C	0.10UF	K		C755			CC73HCH1H470J	CHIP C	47PF	J	
C441			CK73GB1E105K	CHIP C	1.0UF	K		C756			CK73HB1A104K	CHIP C	0.10UF	K	
C442			CK73HB1H471K	CHIP C	470PF	K		C757,758			CK73GB0J475K	CHIP C	4.7UF	K	
C443			CK73HB1E103K	CHIP C	0.010UF	K		C759,760			CK73HB1E103K	CHIP C	0.010UF	K	
C445			CK73HB1H102K	CHIP C	1000PF	K		C761			CC73HCH1H100D	CHIP C	10PF	D	
C446			CK73GB1E105K	CHIP C	1.0UF	K		C762			CK73HB1A104K	CHIP C	0.10UF	K	
C447			CK73HB1H102K	CHIP C	1000PF	K		C763			CK73HB1E103K	CHIP C	0.010UF	K	
C448-450			CK73HB0J105K	CHIP C	1.0UF	K		C764			CK73HB1H102K	CHIP C	1000PF	K	
C452,453			CK73HB1E103K	CHIP C	0.010UF	K		C765-767			CK73HB1A104K	CHIP C	0.10UF	K	
C454			CK73GB1E105K	CHIP C	1.0UF	K		C768			CK73HB1H102K	CHIP C	1000PF	K	
C455-457			CK73HB1H471K	CHIP C	470PF	K		C771			CK73HB1A224K	CHIP C	0.22UF	K	
C459			CK73HB1H471K	CHIP C	470PF	K		C772			CK73HB1E103K	CHIP C	0.010UF	K	
C460			CK73HB1E682K	CHIP C	6800PF	K		C775			CC73HCH1H470J	CHIP C	47PF	J	
C461-463			CK73HB1H471K	CHIP C	470PF	K		C777			CK73HB1H102K	CHIP C	1000PF	K	
C464			CK73HB1E103K	CHIP C	0.010UF	K		C778			CK73HB0J105K	CHIP C	1.0UF	K	
C465			CK73HB1H102K	CHIP C	1000PF	K		C779			CK73HB1E103K	CHIP C	0.010UF	K	
C466			CK73HB1E682K	CHIP C	6800PF	K		C780			CK73HB1A224K	CHIP C	0.22UF	K	
C467,468			CK73HB1A104K	CHIP C	0.10UF	K		C781,782			CK73HB0J105K	CHIP C	1.0UF	K	
C469,470			CK73HB1H102K	CHIP C	1000PF	K		C785			CK73HB1A224K	CHIP C	0.22UF	K	
C471			CK73HB1C473K	CHIP C	0.047UF	K		C786			CK73HB1E103K	CHIP C	0.010UF	K	
C480			CK73HB1E103K	CHIP C	0.010UF	K		C787			CK73HB0J105K	CHIP C	1.0UF	K	
C701			CK73HB1A104K	CHIP C	0.10UF	K		C788			CC73HCH1H150J	CHIP C	15PF	J	
C703			CK73GB0J475K	CHIP C	4.7UF	K		C789			CC73HCH1H680J	CHIP C	68PF	J	
C704,705			CK73HB1A104K	CHIP C	0.10UF	K		C790			CK73HB1A104K	CHIP C	0.10UF	K	
C706			CC73HCH1H680J	CHIP C	68PF	J		C791			CK73HB1A393K	CHIP C	0.039UF	K	
C707			CC73HCH1H270J	CHIP C	27PF	J		C792			CK73HB0J105K	CHIP C	1.0UF	K	
C708			CK73HB1A104K	CHIP C	0.10UF	K		C793,794			CK73HB1A104K	CHIP C	0.10UF	K	

NX-200(S)

PARTS LIST

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description			Desti-nation	Ref. No.	Address	New parts	Parts No.	Description			Desti-nation
C795			CK73HB1E103K	CHIP C	0.010UF	K		R116			RK73HB1J473J	CHIP R	47K	J	1/16W
C796			CK73HB1A104K	CHIP C	0.10UF	K		R118			RK73HB1J473J	CHIP R	47K	J	1/16W
C797			CK73HB0J105K	CHIP C	1.0UF	K		R119			RK73HB1J104J	CHIP R	100K	J	1/16W
C798			CS77CP1A100M	CHIP TNTL	10UF	10WV		R120			RK73HB1J474J	CHIP R	470K	J	1/16W
C799			CK73HB1A104K	CHIP C	0.10UF	K		R121-123			RK73HB1J104J	CHIP R	100K	J	1/16W
C800			CK73HB1H152K	CHIP C	1500PF	K		R126			RK73HB1J101J	CHIP R	100	J	1/16W
C801			CK73HB1C223K	CHIP C	0.022UF	K		R127,128			RK73HB1J000J	CHIP R	0	J	1/16W
C802			CK73HB1E103K	CHIP C	0.010UF	K		R129-131			RK73HB1J101J	CHIP R	100	J	1/16W
C803			CK73HB1H102K	CHIP C	1000PF	K		R132,133			RK73HB1J104J	CHIP R	100K	J	1/16W
C804			CC73CHC1H470J	CHIP C	47PF	J		R135-137			RK73HB1J104J	CHIP R	100K	J	1/16W
C805,806			CK73HB1H471K	CHIP C	470PF	K		R138			RK73HB1J473J	CHIP R	47K	J	1/16W
C808			CK73GB0J475K	CHIP C	4.7UF	K		R139			RK73HB1J104J	CHIP R	100K	J	1/16W
C809			CK73FB1A106K	CHIP C	10UF	K		R140			RK73HB1J000J	CHIP R	0	J	1/16W
C812			CK73HB0J105K	CHIP C	1.0UF	K		R141-143			RK73HB1J104J	CHIP R	100K	J	1/16W
								R144			RK73HB1J471J	CHIP R	470	J	1/16W
CN22			E23-1325-05	TERMINAL				R145-147			RK73HB1J104J	CHIP R	100K	J	1/16W
CN23			E40-6758-05	PIN ASSY				R148			RK73HB1J151J	CHIP R	150	J	1/16W
CN24			E23-1325-05	TERMINAL				R149			RK73HB1J000J	CHIP R	0	J	1/16W
CN403			E40-6813-05	PIN ASSY				R150			RK73HB1J102J	CHIP R	1.0K	J	1/16W
CN404			E40-6421-15	PIN ASSY				R153,154			RK73HB1J104J	CHIP R	100K	J	1/16W
CN405			E40-6754-05	FLAT CABLE CONNECTOR				R155			RK73HB1J473J	CHIP R	47K	J	1/16W
CN710			E40-6757-05	PIN ASSY				R156,157			RK73HB1J472J	CHIP R	4.7K	J	1/16W
F701			F53-0360-05	FUSE(0.25A)				R158,159			RK73HB1J220J	CHIP R	22	J	1/16W
CN401			J19-5386-05	HOLDER(LITHIUM CELL)				R160,161			RK73HB1J000J	CHIP R	0	J	1/16W
								R162			RK73HB1J474J	CHIP R	470K	J	1/16W
L1 ,2			L92-0408-05	CHIP FERRITE				R163			RK73HH1J104D	CHIP R	100K	D	1/16W
L3			L92-0140-05	CHIP FERRITE				R165			RK73HB1J102J	CHIP R	1.0K	J	1/16W
L4 -7			L92-0408-05	CHIP FERRITE				R166			RK73HB1J104J	CHIP R	100K	J	1/16W
L8			L92-0140-05	CHIP FERRITE				R167			RK73HB1J102J	CHIP R	1.0K	J	1/16W
L101,102			L92-0408-05	CHIP FERRITE				R168			RK73HB1J000J	CHIP R	0	J	1/16W
L401			L33-1496-05	SMALL FIXED INDUCTOR(22UH)				R170			RK73HH1J103D	CHIP R	10K	D	1/16W
L402			L92-0467-05	CHIP FERRITE				R171-173			RK73HB1J000J	CHIP R	0	J	1/16W
L403			L92-0466-05	CHIP FERRITE				R174-178			RK73HB1J104J	CHIP R	100K	J	1/16W
L409-411			L92-0467-05	CHIP FERRITE				R180,181			RK73HB1J104J	CHIP R	100K	J	1/16W
L701			L92-0140-05	CHIP FERRITE				R182			RK73HB1J474J	CHIP R	470K	J	1/16W
L702			L92-0162-05	BEADS CORE				R183			RK73HB1J104J	CHIP R	100K	J	1/16W
L704-706			L92-0162-05	BEADS CORE				R184			RK73HB1J473J	CHIP R	47K	J	1/16W
L708,709			L92-0162-05	BEADS CORE				R185			RK73HB1J105J	CHIP R	1.0M	J	1/16W
L710-712			L92-0444-05	CHIP FERRITE				R186			RK73HB1J473J	CHIP R	47K	J	1/16W
L713			L92-0163-05	BEADS CORE				R187			RK73HB1J102J	CHIP R	1.0K	J	1/16W
L714-717			L92-0444-05	CHIP FERRITE				R188			RK73HB1J473J	CHIP R	47K	J	1/16W
L718			L92-0408-05	CHIP FERRITE				R189			RK73HB1J104J	CHIP R	100K	J	1/16W
L719			L33-1494-05	SMALL FIXED INDUCTOR(4.7UH)				R190			RK73HB1J102J	CHIP R	1.0K	J	1/16W
X101			L77-1802-05	CRYSTAL RESONATOR(32.768KHZ)				R191			RK73HB1J474J	CHIP R	470K	J	1/16W
X102			L77-3015-05	TCXO(18.432MHZ)				R192			RK73HB1J102J	CHIP R	1.0K	J	1/16W
R18			RK73HB1J822J	CHIP R	8.2K	J	1/16W	R193,194			RK73HB1J104J	CHIP R	100K	J	1/16W
R19			RK73HB1J471J	CHIP R	470	J	1/16W	R413			RK73HB1J471J	CHIP R	470	J	1/16W
R27			RK73HB1J104J	CHIP R	100K	J	1/16W	R416			RK73HB1J471J	CHIP R	470	J	1/16W
R28,29			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R419,420			RK73HB1J000J	CHIP R	0	J	1/16W
R30			RK73HB1J101J	CHIP R	100	J	1/16W	R424			RK73HH1J683D	CHIP R	68K	D	1/16W
R31			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R425			RK73HH1J333D	CHIP R	33K	D	1/16W
R32 -35			RK73HB1J101J	CHIP R	100	J	1/16W	R426-429			RK73HB1J000J	CHIP R	0	J	1/16W
R40			RK73HB1J000J	CHIP R	0	J	1/16W	R431			RK73HB1J474J	CHIP R	470K	J	1/16W
R101,102			RK73HB1J474J	CHIP R	470K	J	1/16W	R432,433			RK73HB1J000J	CHIP R	0	J	1/16W
R103			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R434			RK73HB1J393J	CHIP R	39K	J	1/16W
R105			RK73HB1J104J	CHIP R	100K	J	1/16W	R435,436			RK73HB1J104J	CHIP R	100K	J	1/16W
R107			RK73HB1J104J	CHIP R	100K	J	1/16W	R437			RK73HB1J471J	CHIP R	470	J	1/16W
R110,111			RK73HB1J104J	CHIP R	100K	J	1/16W	R438,439			RK73HB1J104J	CHIP R	100K	J	1/16W
R113			RK73HB1J104J	CHIP R	100K	J	1/16W	R440			RK73HB1J000J	CHIP R	0	J	1/16W
R115			RK73HB1J104J	CHIP R	100K	J	1/16W	R441			RK73HB1J153J	CHIP R	15K	J	1/16W

PARTS LIST

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description			Desti-nation	Ref. No.	Address	New parts	Parts No.	Description			Desti-nation
R442			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R716			RK73GB2A000J	CHIP R	0	J	1/10W
R443			RK73HB1J474J	CHIP R	470K	J	1/16W	R717-722			RK73HB1J104J	CHIP R	100K	J	1/16W
R444			RK73HB1J564J	CHIP R	560K	J	1/16W	R723			RK73HB1J105J	CHIP R	1.0M	J	1/16W
R445			RK73HB1J154J	CHIP R	150K	J	1/16W	R724			RK73HB1J104J	CHIP R	100K	J	1/16W
R446			RK73HB1J274J	CHIP R	270K	J	1/16W	R725			RK73HB1J100J	CHIP R	10	J	1/16W
R447			RK73HB1J104J	CHIP R	100K	J	1/16W	R726			RK73HB1J104J	CHIP R	100K	J	1/16W
R448			RK73HB1J103J	CHIP R	10K	J	1/16W	R727-729			RK73HB1J105J	CHIP R	1.0M	J	1/16W
R449-452			RK73HB1J474J	CHIP R	470K	J	1/16W	R730			RK73HB1J471J	CHIP R	470	J	1/16W
R453			RK73HB1J104J	CHIP R	100K	J	1/16W	R731,732			RK73HB1J105J	CHIP R	1.0M	J	1/16W
R454			RK73HB1J474J	CHIP R	470K	J	1/16W	R733			RK73HB1J473J	CHIP R	47K	J	1/16W
R455			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R735			RK73HB1J473J	CHIP R	47K	J	1/16W
R456			RK73HB1J474J	CHIP R	470K	J	1/16W	R736			RK73HB1J823J	CHIP R	82K	J	1/16W
R457,458			RK73HB1J104J	CHIP R	100K	J	1/16W	R737			RK73HB1J153J	CHIP R	15K	J	1/16W
R459,460			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R738			RK73HB1J563J	CHIP R	56K	J	1/16W
R461			RK73HB1J103J	CHIP R	10K	J	1/16W	R739			RK73HB1J823J	CHIP R	82K	J	1/16W
R462			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R740			RK73HB1J000J	CHIP R	0	J	1/16W
R463			RK73HB1J104J	CHIP R	100K	J	1/16W	R741			RK73HB1J474J	CHIP R	470K	J	1/16W
R465			RK73HB1J103J	CHIP R	10K	J	1/16W	R742,743			RK73HB1J103J	CHIP R	10K	J	1/16W
R466,467			RK73HB1J104J	CHIP R	100K	J	1/16W	R744			RK73HB1J223J	CHIP R	22K	J	1/16W
R468			RK73HB1J000J	CHIP R	0	J	1/16W	R745			RK73HB1J682J	CHIP R	6.8K	J	1/16W
R469			RK73HB1J474J	CHIP R	470K	J	1/16W	R746			RK73HB1J563J	CHIP R	56K	J	1/16W
R470			RK73HB1J183J	CHIP R	18K	J	1/16W	R748			RK73HB1J103J	CHIP R	10K	J	1/16W
R471			RK73HB1J000J	CHIP R	0	J	1/16W	R749			RK73HB1J472J	CHIP R	4.7K	J	1/16W
R472			RK73HB1J223J	CHIP R	22K	J	1/16W	R750			RK73HB1J103J	CHIP R	10K	J	1/16W
R473			RK73HB1J332J	CHIP R	3.3K	J	1/16W	R752			RK73HB1J101J	CHIP R	100	J	1/16W
R474,475			RK73HB1J333J	CHIP R	33K	J	1/16W	R753			RK73HB1J683J	CHIP R	68K	J	1/16W
R477,478			RK73HB1J000J	CHIP R	0	J	1/16W	R754			RK73HB1J564J	CHIP R	560K	J	1/16W
R479			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R755			RK73HB1J104J	CHIP R	100K	J	1/16W
R481			RK73HB1J474J	CHIP R	470K	J	1/16W	R756			RK73HB1J101J	CHIP R	100	J	1/16W
R483			RK73HB1J473J	CHIP R	47K	J	1/16W	R757			RK73HB1J223J	CHIP R	22K	J	1/16W
R484			RK73HB1J223J	CHIP R	22K	J	1/16W	R758			RK73HB1J103J	CHIP R	10K	J	1/16W
R485			RK73HB1J103J	CHIP R	10K	J	1/16W	R759			RK73HB1J101J	CHIP R	100	J	1/16W
R487-490			RK73HH1J223D	CHIP R	22K	D	1/16W	R761-764			RK73HB1J223J	CHIP R	22K	J	1/16W
R491			RK73HB1J104J	CHIP R	100K	J	1/16W	R765			RK73HB1J334J	CHIP R	330K	J	1/16W
R492			RK73HB1J474J	CHIP R	470K	J	1/16W	R766			RK73HB1J000J	CHIP R	0	J	1/16W
R493			RK73HB1J000J	CHIP R	0	J	1/16W	R767			RK73HB1J103J	CHIP R	10K	J	1/16W
R494-497			RK73HH1J104D	CHIP R	100K	D	1/16W	R768			RK73HB1J224J	CHIP R	220K	J	1/16W
R500			RK73HB1J473J	CHIP R	47K	J	1/16W	R769,770			RK73HB1J334J	CHIP R	330K	J	1/16W
R501			RK73HB1J222J	CHIP R	2.2K	J	1/16W	R771			RK73HB1J153J	CHIP R	15K	J	1/16W
R502,503			RK73HB1J103J	CHIP R	10K	J	1/16W	R775			RK73HB1J183J	CHIP R	18K	J	1/16W
R504			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R777			RK73HB1J473J	CHIP R	47K	J	1/16W
R506			RK73HB1J222J	CHIP R	2.2K	J	1/16W	R778			RK73HB1J333J	CHIP R	33K	J	1/16W
R507-511			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R779			RK73HB1J473J	CHIP R	47K	J	1/16W
R512			RK73HB1J101J	CHIP R	100	J	1/16W	R780			RK73HB1J104J	CHIP R	100K	J	1/16W
R513-515			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R782			RK73HB1J104J	CHIP R	100K	J	1/16W
R516			RK73HB1J101J	CHIP R	100	J	1/16W	R783			RK73HB1J183J	CHIP R	18K	J	1/16W
R517			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R784			RK73HB1J104J	CHIP R	100K	J	1/16W
R518			RK73HB1J101J	CHIP R	100	J	1/16W	R785			RK73HB1J682J	CHIP R	6.8K	J	1/16W
R519-528			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R786			RK73HB1J000J	CHIP R	0	J	1/16W
R529-531			RK73HB1J101J	CHIP R	100	J	1/16W	R787			RK73HB1J124J	CHIP R	120K	J	1/16W
R532			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R788			RK73HB1J473J	CHIP R	47K	J	1/16W
R533-535			RK73HB1J101J	CHIP R	100	J	1/16W	R789			RK73HB1J154J	CHIP R	150K	J	1/16W
R536-540			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R790			RK73HB1J102J	CHIP R	1.0K	J	1/16W
R541			RK73HB1J101J	CHIP R	100	J	1/16W	R791			RK73HB1J474J	CHIP R	470K	J	1/16W
R543			RK73HB1J101J	CHIP R	100	J	1/16W	R793			RK73HB1J102J	CHIP R	1.0K	J	1/16W
R544			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R794			RK73HB1J104J	CHIP R	100K	J	1/16W
R545			RK73HB1J101J	CHIP R	100	J	1/16W	R795			RK73HB1J000J	CHIP R	0	J	1/16W
R546,547			RK73HB1J102J	CHIP R	1.0K	J	1/16W	R796			RK73HB1J333J	CHIP R	33K	J	1/16W
R548,549			RK73HB1J473J	CHIP R	47K	J	1/16W	R797			RK73HB1J102J	CHIP R	1.0K	J	1/16W
R550			RK73HB1J000J	CHIP R	0	J	1/16W	R798			RK73HB1J104J	CHIP R	100K	J	1/16W

NX-200(S)

PARTS LIST

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description				Desti-nation	Ref. No.	Address	New parts	Parts No.	Description				Desti-nation
R799			RK73HB1J334J	CHIP R	330K	J	1/16W		D411			1SS416	DIODE				
R800			RK73HB1J474J	CHIP R	470K	J	1/16W		D412			1SS301F	DIODE				
R801			RK73HB1J473J	CHIP R	47K	J	1/16W		D413			1SS388F	DIODE				
R802			RK73HB1J474J	CHIP R	470K	J	1/16W		D414,415			1SS416	DIODE				
R803			RK73HB1J103J	CHIP R	10K	J	1/16W		D416,417			1SS388F	DIODE				
R804			RK73HB1J000J	CHIP R	0	J	1/16W		D701			1SS301F	DIODE				
R805,806			RK73HB1J473J	CHIP R	47K	J	1/16W		D702			MA2S111-F	DIODE				
R807			RK73HB1J102J	CHIP R	1.0K	J	1/16W		D703-706			KDR73I	DIODE				
R808			RK73HB1J471J	CHIP R	470	J	1/16W		D707			DA221	DIODE				
R809			RK73HB1J334J	CHIP R	330K	J	1/16W		IC101			Note 1	ROM IC				
R810			RK73HB1J332J	CHIP R	3.3K	J	1/16W		IC102			Note 1	MICROPROCESSOR IC				
R811			RK73HB1J823J	CHIP R	82K	J	1/16W		IC103			TC7SH08FU-F	SRAM IC				
R812			RK73HB1J562J	CHIP R	5.6K	J	1/16W		IC104			XC6109C29AN-G	MOS-IC				
R813			RK73HB1J273J	CHIP R	27K	J	1/16W		IC105			RV5C386A	MOS-IC				
R814			RK73HB1J564J	CHIP R	560K	J	1/16W		IC106				MOS-IC				
R815			RK73HB1J104J	CHIP R	100K	J	1/16W		IC107			SM5023CNDH-G	MOS-IC				
R816			RK73HB1J683J	CHIP R	68K	J	1/16W		IC108			Note 1	MOS-IC				
R818			RK73HB1J104J	CHIP R	100K	J	1/16W		IC109			TC7SH08FU-F	MOS-IC				
R819,820			RK73HB1J103J	CHIP R	10K	J	1/16W		IC404			XC6204B332D-G	MOS-IC				
R821			RK73HB1J104J	CHIP R	100K	J	1/16W		IC406			XC6204B332M-G	MOS-IC				
R822,823			RK73HB1J103J	CHIP R	10K	J	1/16W		IC407			LT1616ES6-PBF	ANALOGUE IC				
R824			RK73HB1J393J	CHIP R	39K	J	1/16W		IC408			TC75S51FE(F)	MOS-IC				
R825			RK73HB1J104J	CHIP R	100K	J	1/16W		IC409			TC7W66FK-F	MOS-IC				
R826			RK73HB1J334J	CHIP R	330K	J	1/16W		IC411			NJM2880U105ZB	ANALOGUE IC				
R827			RK73HB1J184J	CHIP R	180K	J	1/16W		IC412,413			TPA6201A1DRBR	ANALOGUE IC				
R828,829			RK73HB1J000J	CHIP R	0	J	1/16W		IC414			XC61CC5602N-G	MOS-IC				
R830			RK73HB1J105J	CHIP R	1.0M	J	1/16W		IC415			TC7SET08FU-F	MOS-IC				
R831			RK73HB1J474J	CHIP R	470K	J	1/16W		IC416			S-812C31BPI-G	ANALOGUE IC				
R832			RK73HB1J473J	CHIP R	47K	J	1/16W		IC417			TC7WH126FK	MOS-IC				
R833			RK73HB1J684J	CHIP R	680K	J	1/16W		IC418			TC7WT125FUF	MOS-IC				
R834			RK73HB1J000J	CHIP R	0	J	1/16W		IC701			PCA9535BS	MOS-IC				
R835			RK73HB1J153J	CHIP R	15K	J	1/16W		IC702			TC75W51FK(F)	MOS-IC				
R836			RK73HB1J473J	CHIP R	47K	J	1/16W		IC703			M62364FP-F	MOS-IC				
R837			RK73HB1J683J	CHIP R	68K	J	1/16W		IC704			TC75S51FE(F)	MOS-IC				
R838			RK73HB1J564J	CHIP R	560K	J	1/16W		IC705			TC75W51FK(F)	MOS-IC				
R839			RK73HB1J333J	CHIP R	33K	J	1/16W		IC706			TC75S51FE(F)	MOS-IC				
R840			RK73HB1J123J	CHIP R	12K	J	1/16W		IC707			TC7W53FK(F)	MOS-IC				
R841			RK73HB1J564J	CHIP R	560K	J	1/16W		IC708			XC6209B502P-G	MOS-IC				
R842			RK73HB1J104J	CHIP R	100K	J	1/16W		IC709			TC7W53FK(F)	MOS-IC				
R843			RK73HB1J102J	CHIP R	1.0K	J	1/16W		IC710,711			TC75W51FK(F)	MOS-IC				
R844			RK73HB1J472J	CHIP R	4.7K	J	1/16W		IC712			TC7S66FUF	MOS-IC				
R845			RK73HB1J104J	CHIP R	100K	J	1/16W		IC713			TC75W51FK(F)	MOS-IC				
R846			RK73HB1J471J	CHIP R	470	J	1/16W		IC714			TC7W53FK(F)	MOS-IC				
R847			RK73HB1J182J	CHIP R	1.8K	J	1/16W		IC715			TC75S51FE(F)	MOS-IC				
R848-850			RK73HB1J000J	CHIP R	0	J	1/16W		IC716			TC75W51FK(F)	MOS-IC				
R851,852			RK73HB1J683J	CHIP R	68K	J	1/16W		IC717			XC9235A15CM-G	MOS-IC				
R853			RK73HB1J000J	CHIP R	0	J	1/16W		Q4			SSM3K15TE(F)	FET				
R855			RK73HB1J332J	CHIP R	3.3K	J	1/16W		Q5			2SJ347F	FET				
D12 -16			1SS416	DIODE					Q401,402			SSM6N16FE-F	FET				
D17			EMZ6.8N	ZENER DIODE					Q403			2SJ648-A	FET				
D18 ,19			HZC6.8-E	ZENER DIODE					Q404			SSM3K15TE(F)	FET				
D20 ,21			NNCD6.8G-A	ZENER DIODE					Q405			SSM6N16FE-F	FET				
D22 ,23			DA221	DIODE					Q406			2SB1132(Q,R)	TRANSISTOR				
D102			1SS416	DIODE					Q407			UMG3N	TRANSISTOR				
D404,405			1SS388F	DIODE					Q408			EMD12	TRANSISTOR				
D406			HRB0502A	DIODE					Q409			2SA1955A-F	TRANSISTOR				
D407			MA2S111-F	DIODE					Q410			SSM3K15TE(F)	FET				
D408			1SS301F	DIODE					Q411			SSM6N16FE-F	FET				
D409,410			MA2S111-F	DIODE					Q412			SSM3K15TE(F)	FET				
									Q413			2SA1955A-F	TRANSISTOR				

Note 1: This part cannot be replaced. Therefore, this part is not supplied as a service part.

PARTS LIST

CONTROL UNIT (X53-4432-75)
TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description	Desti-nation	Ref. No.	Address	New parts	Parts No.	Description	Desti-nation
Q414,415			EMD12	TRANSISTOR		C62			CC73HCH1H030B	CHIP C	3.0PF B
Q702,703			SSM3K15TE(F)	FET		C63			CK73HB1H471K	CHIP C	470PF K
Q704			KTC4075E(Y,GR)	TRANSISTOR		C64			CC73HCH1H030B	CHIP C	3.0PF B
Q705			2SC4738(GR)F	TRANSISTOR		C65			CC73HCH1HR75B	CHIP C	0.75PF B
Q706			2SA1832(GR)F	TRANSISTOR		C66			CC73HCH1H080B	CHIP C	8.0PF B
Q707			2SJ243-A	FET		C67 -69			CC73HCH1H100B	CHIP C	10PF B
TH701			ERTJ0EV104H	THERMISTOR		C70			CK73HB1H102K	CHIP C	1000PF K
						C71			CK73GB1H103K	CHIP C	0.01UF K
						C72			CK73GB1H102K	CHIP C	1000PF K
						C74,75			CC73HCH1H0R5B	CHIP C	0.5PF B
						C76			CK73HB1H102K	CHIP C	1000PF K
						C77			CC73HCH1H220J	CHIP C	22PF J
						C78			CK73HB1H471K	CHIP C	470PF K
						C79			CC73HCH1H101J	CHIP C	100PF J
						C81			CC73HCH1H470J	CHIP C	47PF J
TX-RX UNIT (X57-7820-10)						C82			CK73FB0J106K	CHIP C	10UF K
D402			B30-2278-05	LED(RED/YELLOW)		C83			CK73HB1H471K	CHIP C	470PF K
C1			CC73HCH1H101J	CHIP C	100PF J	C84			CC73HCH1H050B	CHIP C	5.0PF B
C3			CK73HB1C103K	CHIP C	0.010UF K	C85			CK73HB0J105K	CHIP C	1.0UF K
C4			CC73HCH1H101J	CHIP C	100PF J	C87			CK73HB1C103K	CHIP C	0.010UF K
C5			CC73HCH1H100C	CHIP C	10PF C	C88			CC73HCH1H101J	CHIP C	100PF J
C6			CK73HB1C103K	CHIP C	0.010UF K	C90,91			CK73HB1A104K	CHIP C	0.10UF K
C7			CK73GB1E105K	CHIP C	1.0UF K	C92			CC73HCH1H020B	CHIP C	2.0PF B
C8			CK73HB1H102K	CHIP C	1000PF K	C93			CC73HCH1H330J	CHIP C	33PF J
C9			CC73HCH1H100C	CHIP C	10PF C	C100			CC73HCH1H150J	CHIP C	15PF J
C10,11			CC73HCH1H101J	CHIP C	100PF J	C101,102			CK73HB1H102K	CHIP C	1000PF K
C12			CK73HB1H471K	CHIP C	470PF K	C104			CC73HCH1H100C	CHIP C	10PF C
C13			CC73HCH1H101J	CHIP C	100PF J	C106			CK73HB1H102K	CHIP C	1000PF K
C15			CK73HB1H471K	CHIP C	470PF K	C109			CK73HB1H471K	CHIP C	470PF K
C16,17			CC73HCH1H101J	CHIP C	100PF J	C111			CK73HB1H102K	CHIP C	1000PF K
C18			CK73HB1C103K	CHIP C	0.010UF K	C112			CC73HCH1H560J	CHIP C	56PF J
C19			CK73HB1H471K	CHIP C	470PF K	C114,115			CK73HB1H102K	CHIP C	1000PF K
C20			CC73HCH1H220G	CHIP C	22PF G	C116			CK73HB1A104K	CHIP C	0.10UF K
C21			CK73HB1H471K	CHIP C	470PF K	C117			CK73HB1H102K	CHIP C	1000PF K
C22			CC73HCH1H390G	CHIP C	39PF G	C119			CC73HCH1H180J	CHIP C	18PF J
C24,25			CC73HCH1H101J	CHIP C	100PF J	C120			CK73HB1H471K	CHIP C	470PF K
C26			CC73HCH1H030B	CHIP C	3.0PF B	C122			CK73HB1H102K	CHIP C	1000PF K
C27			CK73HB1A104K	CHIP C	0.10UF K	C123			CK73HB1A104K	CHIP C	0.10UF K
C28			CC73HCH1H101J	CHIP C	100PF J	C124			CC73HCH1H560J	CHIP C	56PF J
C29			CK73HB1A104K	CHIP C	0.10UF K	C125			CK73HB1H102K	CHIP C	1000PF K
C30			C93-0787-05	CHIP C	0.1UF J	C127			CC73HCH1H100C	CHIP C	10PF C
C31			CC73HCH1H220G	CHIP C	22PF G	C128			CS77CA1A6R8M	CHIP TNTL	6.8UF 10WV
C32			CC73HCH1H101J	CHIP C	100PF J	C129			CK73HB1A104K	CHIP C	0.10UF K
C34			CC73HCH1H470G	CHIP C	47PF G	C130			CK73HB1H102K	CHIP C	1000PF K
C35			CC73HCH1H101J	CHIP C	100PF J	C131			CK73GB1E105K	CHIP C	1.0UF K
C36,37			CK73HB1H471K	CHIP C	470PF K	C132			CK73HB1H102K	CHIP C	1000PF K
C38			CK73HB1H102K	CHIP C	1000PF K	C133,134			CK73HB1H471K	CHIP C	470PF K
C41			CK73HB1H472K	CHIP C	4700PF K	C135			CC73GCH1H220G	CHIP C	22PF G
C42			CK73HB1H471K	CHIP C	470PF K	C136			CK73GB1H102K	CHIP C	1000PF K
C43			CS77CA1VR15M	CHIP TNTL	0.15UF 35WV	C137			CK73HB1H471K	CHIP C	470PF K
C44			CS77BA1D100M	CHIP TNTL	10UF 20WV	C138			CC73GCH1H120G	CHIP C	12PF G
C45-47			CK73HB1H471K	CHIP C	470PF K	C139			CK73HB1A104K	CHIP C	0.10UF K
C48			C92-0863-05	CHIP TNTL	0.047UF 35WV	C140			CC73GCH1H070B	CHIP C	7.0PF B
C50,51			CC73HCH1H101J	CHIP C	100PF J	C141			CK73HB1H471K	CHIP C	470PF K
C52			CK73HB1H471K	CHIP C	470PF K	C142			CC73GCH1H090B	CHIP C	9.0PF B
C53			CK73FB0J106K	CHIP C	10UF K	C143			CC73HCH1H101J	CHIP C	100PF J
C54			CK73HB1H471K	CHIP C	470PF K	C144			CC73GCH1H240G	CHIP C	24PF G
C55			CK73GB0J475K	CHIP C	4.7UF K	C145			CK73HB1C103K	CHIP C	0.010UF K
C56			CK73HB0J105K	CHIP C	1.0UF K	C146			CC73GCH1H090B	CHIP C	9.0PF B
C57			CC73HCH1H270J	CHIP C	27PF J	C147			CK73HB1H102K	CHIP C	1000PF K
C58			CC73HCH1H470J	CHIP C	47PF J	C148			CC73GCH1H120G	CHIP C	12PF G
C60			CK73HB1H471K	CHIP C	470PF K	C149			CK73HB1A104K	CHIP C	0.10UF K
						C150					

NX-200(S)

PARTS LIST

TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description			Desti-nation	Ref. No.	Address	New parts	Parts No.	Description			Desti-nation
C151			CK73GB1C104K	CHIP C	0.10UF	K		C250			CC73HCH1H030B	CHIP C	3.0PF	B	
C152			CK73GB1E105K	CHIP C	1.0UF	K		C251			CC73HCH1H060B	CHIP C	6.0PF	B	
C154			CC73GCH1H030B	CHIP C	3.0PF	B		C252			CC73HCH1H470G	CHIP C	47PF	G	
C155			CK73HB1H471K	CHIP C	470PF	K		C254			CC73HCH1H100B	CHIP C	10PF	B	
C156			CK73HB1C103K	CHIP C	0.010UF	K		C259			CC73HCH1H820J	CHIP C	82PF	J	
C158			CC73GCH1H330G	CHIP C	33PF	G		C261			CC73HCH1H270J	CHIP C	27PF	J	
C159			CK73HB1H471K	CHIP C	470PF	K		C262			CK73HB1C103K	CHIP C	0.010UF	K	
C160			CK73HB1A104K	CHIP C	0.10UF	K		C264			CC73HCH1H270J	CHIP C	27PF	J	
C163			CC73GCH1H120G	CHIP C	12PF	G		C267			CK73HB1H102K	CHIP C	1000PF	K	
C165			CC73GCH1H070B	CHIP C	7.0PF	B		C268			CC73HCH1H390J	CHIP C	39PF	J	
C166			CC73GCH1H560J	CHIP C	56PF	J		C270			CC73HCH1H1R5B	CHIP C	1.5PF	B	
C167,168			CC73HCH1H101J	CHIP C	100PF	J		C273			CC73HCH1H330J	CHIP C	33PF	J	
C169			CK73HB1A104K	CHIP C	0.10UF	K		C274			CK73HB1H102K	CHIP C	1000PF	K	
C173			CK73HB1H471K	CHIP C	470PF	K		C275,276			CK73HB1A104K	CHIP C	0.10UF	K	
C177			CC73HCH1H220J	CHIP C	22PF	J		C278			CK73HB1H102K	CHIP C	1000PF	K	
C178			CC73HCH1H120J	CHIP C	12PF	J		C281			CK73HB1C103K	CHIP C	0.010UF	K	
C179			CC73HCH1H100B	CHIP C	10PF	B		C282			CK73GB1E105K	CHIP C	1.0UF	K	
C180			CC73GCH1H120G	CHIP C	12PF	G		C283-286			CK73HB1H102K	CHIP C	1000PF	K	
C190			CC73GCH1H270G	CHIP C	27PF	G		C290			CC73HCH1H150J	CHIP C	15PF	J	
C191			CC73GCH1H181J	CHIP C	180PF	J		C291			CK73HB1H102K	CHIP C	1000PF	K	
C193			CC73GCH1H330G	CHIP C	33PF	G		C295			CC73HCH1H100B	CHIP C	10PF	B	
C201,202			CK73GB1H104K	CHIP C	0.10UF	K		C296			CC73HCH1H020B	CHIP C	2.0PF	B	
C203			CC73HCH1H070B	CHIP C	7.0PF	B		C297			CC73HCH1H010B	CHIP C	1.0PF	B	
C204			CK73HB1C103K	CHIP C	0.010UF	K		C298			CC73HCH1H020B	CHIP C	2.0PF	B	
C206			CK73HB1C103K	CHIP C	0.010UF	K		C299			CC73HCH1H180J	CHIP C	18PF	J	
C207			CC73HCH1H100B	CHIP C	10PF	B		C301			CC73HCH1H180J	CHIP C	18PF	J	
C208			CC73HCH1H680J	CHIP C	68PF	J		C304			CC73HCH1H120J	CHIP C	12PF	J	
C209			CC73HCH1H101J	CHIP C	100PF	J		C306			CC73HCH1H390J	CHIP C	39PF	J	
C210			CK73HB1H471K	CHIP C	470PF	K		C307			CC73HCH1H180J	CHIP C	18PF	J	
C211			CK73HB1C103K	CHIP C	0.010UF	K		C310			CC73HCH1H470G	CHIP C	47PF	G	
C212			CC73HCH1H680J	CHIP C	68PF	J		C311			CK73HB1C103K	CHIP C	0.010UF	K	
C213			CK73HB1C103K	CHIP C	0.010UF	K		C312			CK73GB1H104K	CHIP C	0.10UF	K	
C215			CC73HCH1H050B	CHIP C	5.0PF	B		C314			CK73HB1A104K	CHIP C	0.10UF	K	
C216			CC73HCH1H220G	CHIP C	22PF	G		C316			CK73HB1H102K	CHIP C	1000PF	K	
C217			CC73HCH1H470J	CHIP C	47PF	J		C317			CC73HCH1H100B	CHIP C	10PF	B	
C219			CC73HCH1H060B	CHIP C	6.0PF	B		C320			CC73HCH1H010B	CHIP C	1.0PF	B	
C220			CK73HB1C103K	CHIP C	0.010UF	K		C355,356			CK73HB1A104K	CHIP C	0.10UF	K	
C221			CK73HB1A104K	CHIP C	0.10UF	K		C362			CC73HCH1H330J	CHIP C	33PF	J	
C222,223			CK73HB1C103K	CHIP C	0.010UF	K		C386			CC73HCH1H070B	CHIP C	7.0PF	B	
C224,225			CK73HB1A104K	CHIP C	0.10UF	K		C400			CC73GCH1H220J	CHIP C	22PF	J	
C226			CK73HB1H471K	CHIP C	470PF	K		C402,403			CK73HB1H471K	CHIP C	470PF	K	
C227,228			CK73HB1A104K	CHIP C	0.10UF	K		C404-406			CK73GB1E105K	CHIP C	1.0UF	K	
C229			CC73HCH1H100B	CHIP C	10PF	B		C407			CK73GB1C224K	CHIP C	0.22UF	K	
C230			CK73HB1A104K	CHIP C	0.10UF	K		C408			CK73GB1E105K	CHIP C	1.0UF	K	
C231			CC73HCH1H100B	CHIP C	10PF	B		C409			C92-0765-05	CHIP TNTL	4.7UF	16WV	
C232			CK73HB1H102K	CHIP C	1000PF	K		C410			CK73GB1C224K	CHIP C	0.22UF	K	
C233			CK73HB1C103K	CHIP C	0.010UF	K		C411			CK73HB1A104K	CHIP C	0.10UF	K	
C234			CK73FB1E474K	CHIP C	0.47UF	K		C414			CK73GB1C224K	CHIP C	0.22UF	K	
C235			CK73HB1H102K	CHIP C	1000PF	K		C415			CK73HB1H471K	CHIP C	470PF	K	
C236,237			CK73FB1A106K	CHIP C	10UF	K		C416			CK73GB1E105K	CHIP C	1.0UF	K	
C238			CK73HB1C103K	CHIP C	0.010UF	K		C417			CC73HCH1E181J	CHIP C	180PF	J	
C239			CK73HB1A104K	CHIP C	0.10UF	K		C418			CK73GB1E105K	CHIP C	1.0UF	K	
C240			CC73HCH1H040B	CHIP C	4.0PF	B		C419			CC73HCH1H220J	CHIP C	22PF	J	
C241,242			CK73HB1H102K	CHIP C	1000PF	K		C420			CK73HB1H471K	CHIP C	470PF	K	
C244			CC73HCH1H120G	CHIP C	12PF	G		C421			CK73GB1C224K	CHIP C	0.22UF	K	
C245			CK73FB1A475K	CHIP C	4.7UF	K		C422			CK73GB1E105K	CHIP C	1.0UF	K	
C246			CK73HB1A104K	CHIP C	0.10UF	K		C423			CK73GB1C224K	CHIP C	0.22UF	K	
C247			CC73HCH1H050B	CHIP C	5.0PF	B		C424,425			CK73GB1E105K	CHIP C	1.0UF	K	
C248			CC73HCH1H220G	CHIP C	22PF	G		C426			CC73HCH1H470J	CHIP C	47PF	J	
C249			CK73HB1A104K	CHIP C	0.10UF	K		C428-445			CC73HCH1H470J	CHIP C	47PF	J	

PARTS LIST

TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description			Desti-nation	Ref. No.	Address	New parts	Parts No.	Description			Desti-nation
C447			CC73HCH1H470J	CHIP C	47PF	J		L206			L41-5685-39	SMALL FIXED INDUCTOR(0.56UH)			
C449-458			CC73HCH1H470J	CHIP C	47PF	J		L207			L40-1085-92	SMALL FIXED INDUCTOR(100NH)			
C460			CC73HCH1H470J	CHIP C	47PF	J		L208,209			L40-3375-92	SMALL FIXED INDUCTOR(33NH)			
C462,463			CK73HB1H471K	CHIP C	470PF	K		L210			L41-6878-14	SMALL FIXED INDUCTOR(68NH)			
C464-468			CK73HB1H102K	CHIP C	1000PF	K		L214			L92-0138-05	CHIP FERRITE			
C470			CC73HCH1H470J	CHIP C	47PF	J		L215			L41-6878-14	SMALL FIXED INDUCTOR(68NH)			
C472-474			CC73HCH1H470J	CHIP C	47PF	J		L220			L41-6878-14	SMALL FIXED INDUCTOR(68NH)			
C475			CK73HB0J105K	CHIP C	1.0UF	K		L223			L40-5675-92	SMALL FIXED INDUCTOR(56NH)			
C476			CC73HCH1H470J	CHIP C	47PF	J		L224			L41-5678-14	SMALL FIXED INDUCTOR(56NH)			
C478,479			CC73HCH1H470J	CHIP C	47PF	J		L226			L92-0138-05	CHIP FERRITE			
C480			CK73GB1E105K	CHIP C	1.0UF	K		L230			L40-2702-86	SMALL FIXED INDUCTOR(27UH)			
C499			CC73HCH1H470J	CHIP C	47PF	J		L250			L40-1085-57	SMALL FIXED INDUCTOR(100NH)			
CN102			E23-1326-05	TERMINAL				L400			L92-0149-05	CHIP FERRITE			
CN400			E40-6422-15	SOCKET FOR PIN ASSY				L401			L33-1462-05	SMALL FIXED INDUCTOR(68UH)			
CN401			E40-6752-05	FLAT CABLE CONNECTOR				L402			L41-2285-14	SMALL FIXED INDUCTOR(220NH)			
CN736			E40-6358-05	SOCKET FOR PIN ASSY				X1			L77-3014-05	TCXO (19.2MHZ)			
F400			F53-0324-15	FUSE(2.5A)				XF200			L71-0640-05	MCF (58.05MHZ)			
CF200			L72-1017-05	CERAMIC FILTER				R1			RK73HH1J474D	CHIP R	470K	D	1/16W
CF201			L72-1020-05	CERAMIC FILTER				R2			RK73HB1J472J	CHIP R	4.7K	J	1/16W
L1			L41-4795-39	SMALL FIXED INDUCTOR(4.7UH)				R3			RK73HB1J100J	CHIP R	10	J	1/16W
L2 ,3			L40-5667-92	SMALL FIXED INDUCTOR(5.6NH)				R5 ,6			RK73HB1J100J	CHIP R	10	J	1/16W
L5			L40-8275-92	SMALL FIXED INDUCTOR(82NH)				R7			RK73HB1J472J	CHIP R	4.7K	J	1/16W
L6 ,7			L40-5667-92	SMALL FIXED INDUCTOR(5.6NH)				R8			RK73HB1J100J	CHIP R	10	J	1/16W
L8			L40-3975-92	SMALL FIXED INDUCTOR(39NH)				R9			RK73HB1J102J	CHIP R	1.0K	J	1/16W
L10			L92-0163-05	BEADS CORE				R10			RK73HB1J000J	CHIP R	0	J	1/16W
L11			L40-1891-86	SMALL FIXED INDUCTOR(1.8UH)				R11 ,12			RK73HB1J223J	CHIP R	22K	J	1/16W
L12			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)				R15			RK73HB1J100J	CHIP R	10	J	1/16W
L15			L92-0446-05	BEADS CORE				R17			RK73HH1J184D	CHIP R	180K	D	1/16W
L16 -20			L40-2285-92	SMALL FIXED INDUCTOR(220NH)				R18			RK73HH1J473D	CHIP R	47K	D	1/16W
L23			L40-5678-67	SMALL FIXED INDUCTOR(56NH)				R19			RK73HB1J102J	CHIP R	1.0K	J	1/16W
L24			L40-2778-67	SMALL FIXED INDUCTOR(27NH)				R21			RK73HB1J106J	CHIP R	10M	J	1/16W
L25			L40-1285-92	SMALL FIXED INDUCTOR(120NH)				R22 ,23			RK73HB1J100J	CHIP R	10	J	1/16W
L26 ,27			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)				R24 ,25			RK73HB1J000J	CHIP R	0	J	1/16W
L29			L40-1085-71	SMALL FIXED INDUCTOR(100NH)				R26			RK73HB1J331J	CHIP R	330	J	1/16W
L30			L40-6875-92	SMALL FIXED INDUCTOR(68NH)				R27			RK73HB1J000J	CHIP R	0	J	1/16W
L98 ,99			L92-0163-05	BEADS CORE				R28			RK73HB1J223J	CHIP R	22K	J	1/16W
L100			L40-1085-92	SMALL FIXED INDUCTOR(100NH)				R29			RK73HB1J000J	CHIP R	0	J	1/16W
L102			L40-6875-92	SMALL FIXED INDUCTOR(68NH)				R30			RK73HB1J563J	CHIP R	56K	J	1/16W
L103			L40-1085-92	SMALL FIXED INDUCTOR(100NH)				R31			RK73HB1J121J	CHIP R	120	J	1/16W
L104			L92-0138-05	CHIP FERRITE				R32			RK73HB1J000J	CHIP R	0	J	1/16W
L105			L40-4775-92	SMALL FIXED INDUCTOR(47NH)				R33			RK73HB1J223J	CHIP R	22K	J	1/16W
L106			L41-1085-43	SMALL FIXED INDUCTOR(100NH)				R34			RK73HH1J391D	CHIP R	390	D	1/16W
L107			L92-0149-05	CHIP FERRITE				R35			RK73HB1J103J	CHIP R	10K	J	1/16W
L108			L40-1575-92	SMALL FIXED INDUCTOR(15NH)				R36			RK73HB1J472J	CHIP R	4.7K	J	1/16W
L109,110			L34-4568-05	AIR-CORE COIL				R37 ,38			RK73HB1J000J	CHIP R	0	J	1/16W
L111			L34-4576-05	AIR-CORE COIL				R39			RK73HB1J152J	CHIP R	1.5K	J	1/16W
L112			L92-0149-05	CHIP FERRITE				R40			RK73HB1J103J	CHIP R	10K	J	1/16W
L113			L34-4566-05	AIR-CORE COIL				R41			RK73HB1J474J	CHIP R	470K	J	1/16W
L114			L34-4565-05	AIR-CORE COIL				R42			RK73HB1J473J	CHIP R	47K	J	1/16W
L115			L41-2295-39	SMALL FIXED INDUCTOR(2.2UH)				R43			RK73HB1J102J	CHIP R	1.0K	J	1/16W
L117			L34-4577-05	AIR-CORE COIL				R44 ,45			RK73HB1J473J	CHIP R	47K	J	1/16W
L118			L34-4564-05	AIR-CORE COIL				R46			RK73HH1J331D	CHIP R	330	D	1/16W
L119			L34-4563-05	AIR-CORE COIL				R47			RK73HB1J220J	CHIP R	22	J	1/16W
L201			L40-5681-86	SMALL FIXED INDUCTOR(0.56UH)				R48			RK73HH1J271D	CHIP R	270	D	1/16W
L202			L40-1891-86	SMALL FIXED INDUCTOR(1.8UH)				R49			RK73HB1J154J	CHIP R	150K	J	1/16W
L203			L41-4778-45	SMALL FIXED INDUCTOR(47NH)				R50			RK73HB1J101J	CHIP R	100	J	1/16W
L204			L92-0138-05	CHIP FERRITE				R51			RK73HB1J102J	CHIP R	1.0K	J	1/16W
L205			L41-2785-39	SMALL FIXED INDUCTOR(0.27UH)				R52			RK73HB1J473J	CHIP R	47K	J	1/16W
								R53			RK73HB1J683J	CHIP R	68K	J	1/16W

NX-200(S)

PARTS LIST

TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description				Desti-nation	Ref. No.	Address	New parts	Parts No.	Description				Desti-nation
R54			RK73HB1J102J	CHIP R	1.0K	J	1/16W		R168			RK73HB1J124J	CHIP R	120K	J	1/16W	
R55			RK73HB1J104J	CHIP R	100K	J	1/16W		R170			RK73HB1J224J	CHIP R	220K	J	1/16W	
R56			RK73HB1J000J	CHIP R	0	J	1/16W		R171			RK73GB2A000J	CHIP R	0	J	1/10W	
R57			RK73HB1J124J	CHIP R	120K	J	1/16W		R176,177			RK73HB1J331J	CHIP R	330	J	1/16W	
R58			RK73HB1J823J	CHIP R	82K	J	1/16W		R202,203			RK73HB1J103J	CHIP R	10K	J	1/16W	
R59,60			RN73HH1J104D	CHIP R	100K	D	1/16W		R204			RK73HB1J561J	CHIP R	560	J	1/16W	
R62			RK73HB1J104J	CHIP R	100K	J	1/16W		R205			RK73HB1J224J	CHIP R	220K	J	1/16W	
R63			RK73HB1J220J	CHIP R	22	J	1/16W		R206			RK73HB1J104J	CHIP R	100K	J	1/16W	
R64			RK73HB1J473J	CHIP R	47K	J	1/16W		R207			RK73HB1J224J	CHIP R	220K	J	1/16W	
R67			RK73HB1J472J	CHIP R	4.7K	J	1/16W		R208-210			RK73HB1J104J	CHIP R	100K	J	1/16W	
R68			RK73HB1J474J	CHIP R	470K	J	1/16W		R211			RK73HB1J334J	CHIP R	330K	J	1/16W	
R69			RK73HB1J560J	CHIP R	56	J	1/16W		R212			RK73HB1J221J	CHIP R	220	J	1/16W	
R70,71			RK73HB1J000J	CHIP R	0	J	1/16W		R214			RK73HB1J564J	CHIP R	560K	J	1/16W	
R72			RK73HB1J104J	CHIP R	100K	J	1/16W		R216			RK73HB1J221J	CHIP R	220	J	1/16W	
R74			RK73HB1J153J	CHIP R	15K	J	1/16W		R218			RK73HB1J221J	CHIP R	220	J	1/16W	
R75			RK73HB1J100J	CHIP R	10	J	1/16W		R220			RK73HB1J470J	CHIP R	47	J	1/16W	
R76,77			RK73HB1J000J	CHIP R	0	J	1/16W		R221			RK73HB1J104J	CHIP R	100K	J	1/16W	
R100			RK73HB1J332J	CHIP R	3.3K	J	1/16W		R222			RK73HB1J100J	CHIP R	10	J	1/16W	
R101			RK73HB1J103J	CHIP R	10K	J	1/16W		R223			RK73HB1J274J	CHIP R	270K	J	1/16W	
R102			RK73HB1J271J	CHIP R	270	J	1/16W		R225			RK73HB1J681J	CHIP R	680	J	1/16W	
R103			RK73HB1J222J	CHIP R	2.2K	J	1/16W		R226			RK73HB1J103J	CHIP R	10K	J	1/16W	
R104			RK73HB1J470J	CHIP R	47	J	1/16W		R227			RK73HB1J472J	CHIP R	4.7K	J	1/16W	
R105			RK73HB1J000J	CHIP R	0	J	1/16W		R228			RK73HB1J221J	CHIP R	220	J	1/16W	
R106,107			RK73HB1J472J	CHIP R	4.7K	J	1/16W		R229			RK73HB1J103J	CHIP R	10K	J	1/16W	
R111			RK73HB1J000J	CHIP R	0	J	1/16W		R230			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R118			RK73HB1J101J	CHIP R	100	J	1/16W		R231			RK73HB1J223J	CHIP R	22K	J	1/16W	
R119			RK73HB1J103J	CHIP R	10K	J	1/16W		R233			RK73HB1J183J	CHIP R	18K	J	1/16W	
R120			RK73HB1J223J	CHIP R	22K	J	1/16W		R234,235			RK73HB1J823J	CHIP R	82K	J	1/16W	
R123			RK73HB1J331J	CHIP R	330	J	1/16W		R236			RK73HB1J222J	CHIP R	2.2K	J	1/16W	
R124			RK73HB1J180J	CHIP R	18	J	1/16W		R237			RK73HB1J472J	CHIP R	4.7K	J	1/16W	
R126			RK73HB1J273J	CHIP R	27K	J	1/16W		R238			RK73HB1J222J	CHIP R	2.2K	J	1/16W	
R127			RK73HB1J473J	CHIP R	47K	J	1/16W		R239,240			RK73HB1J823J	CHIP R	82K	J	1/16W	
R129			RK73HB1J470J	CHIP R	47	J	1/16W		R241			RK73GB2A000J	CHIP R	0	J	1/10W	
R130			RK73HB1J333J	CHIP R	33K	J	1/16W		R242			RK73HB1J473J	CHIP R	47K	J	1/16W	
R131			RK73HB1J561J	CHIP R	560	J	1/16W		R243			RK73HB1J183J	CHIP R	18K	J	1/16W	
R133			RK73HB1J331J	CHIP R	330	J	1/16W		R245			RK73HB1J104J	CHIP R	100K	J	1/16W	
R134			RK73HB1J561J	CHIP R	560	J	1/16W		R246			RK73HB1J101J	CHIP R	100	J	1/16W	
R135			RK73HB1J222J	CHIP R	2.2K	J	1/16W		R248			RK73HB1J100J	CHIP R	10	J	1/16W	
R136			RK73EB2ER39K	CHIP R	0.39	K	1/4W		R251			RK73HB1J000J	CHIP R	0	J	1/16W	
R137			RK73HB1J100J	CHIP R	10	J	1/16W		R253			RK73HB1J102J	CHIP R	1.0K	J	1/16W	
R138			RK73EB2ER39K	CHIP R	0.39	K	1/4W		R254			RK73HB1J103J	CHIP R	10K	J	1/16W	
R139			RK73HB1J473J	CHIP R	47K	J	1/16W		R255			RK73HB1J272J	CHIP R	2.7K	J	1/16W	
R141			RK73EB2ER39K	CHIP R	0.39	K	1/4W		R256			RK73HB1J103J	CHIP R	10K	J	1/16W	
R142			RK73HB1J223J	CHIP R	22K	J	1/16W		R257			RK73HB1J000J	CHIP R	0	J	1/16W	
R144,145			RK73HH1J154D	CHIP R	150K	D	1/16W		R260			RK73HB1J105J	CHIP R	1.0M	J	1/16W	
R146			RK73GB2A000J	CHIP R	0	J	1/10W		R262			RK73HB1J105J	CHIP R	1.0M	J	1/16W	
R147-150			RK73HH1J184D	CHIP R	180K	D	1/16W		R263			RK73HB1J000J	CHIP R	0	J	1/16W	
R151			RK73HB1J103J	CHIP R	10K	J	1/16W		R265			RK73HB1J000J	CHIP R	0	J	1/16W	
R152			RK73EB2EB823J	CHIP R	82K	J	1/4W		R268			RK73HB1J680J	CHIP R	68	J	1/16W	
R153			RK73HB1J473J	CHIP R	47K	J	1/16W		R269			RK73HB1J221J	CHIP R	220	J	1/16W	
R154			RK73HB1J000J	CHIP R	0	J	1/16W		R272			RK73HB1J154J	CHIP R	150K	J	1/16W	
R155			RK73HB1J474J	CHIP R	470K	J	1/16W		R273			RK73HB1J823J	CHIP R	82K	J	1/16W	
R156			RK73HB1J182J	CHIP R	1.8K	J	1/16W		R274			RK73GB2A000J	CHIP R	0	J	1/10W	
R157,158			RK73HB1J104J	CHIP R	100K	J	1/16W		R276,277			RK73HB1J104J	CHIP R	100K	J	1/16W	
R161			RK73HB1J000J	CHIP R	0	J	1/16W		R279			RK73HB1J000J	CHIP R	0	J	1/16W	
R162,163			RK73HB1J271J	CHIP R	270	J	1/16W		R280			RK73GB2A000J	CHIP R	0	J	1/10W	
R164			RK73HB1J103J	CHIP R	10K	J	1/16W		R281			RK73HB1J000J	CHIP R	0	J	1/16W	
R165			RK73HB1J474J	CHIP R	470K	J	1/16W		R282			RK73HB1J103J	CHIP R	10K	J	1/16W	
R166			RK73HB1J102J	CHIP R	1.0K	J	1/16W		R283			RK73HB1J104J	CHIP R	100K	J	1/16W	
R167			RK73HB1J183J	CHIP R	18K	J	1/16W		R285			RK73HB1J103J	CHIP R	10K	J	1/16W	


PARTS LIST

TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description			Desti-nation	Ref. No.	Address	New parts	Parts No.	Description			Desti-nation
R289			RK73HB1J000J	CHIP R	0	J	1/16W	D201			HSC277	DIODE			
R293			RK73HB1J473J	CHIP R	47K	J	1/16W	D204,205			1SV305F	VARIABLE CAPACITANCE DIODE			
R295			RK73GB2A000J	CHIP R	0	J	1/10W	D207,208			1SV305F	VARIABLE CAPACITANCE DIODE			
R296			RK73HB1J102J	CHIP R	1.0K	J	1/16W	D209			HVC131	DIODE			
R299			RK73HB1J470J	CHIP R	47	J	1/16W	D211			HVC131	DIODE			
R300-305			RK73HB1J000J	CHIP R	0	J	1/16W	D213			HVC131	DIODE			
R307			RK73HB1J000J	CHIP R	0	J	1/16W	D400			1SR154-400	DIODE			
R310,311			RK73HB1J000J	CHIP R	0	J	1/16W	D401			HSC119	DIODE			
R313,314			RK73HB1J000J	CHIP R	0	J	1/16W	D403			1SS388F	DIODE			
R319-322			RK73HB1J000J	CHIP R	0	J	1/16W	IC1			LM73CIMKX-0	MOS-IC			
R325			RK73GB2A000J	CHIP R	0	J	1/10W	IC2			LMC7101BIM5	MOS-IC			
R326			RK73HB1J104J	CHIP R	100K	J	1/16W	IC3			SKY72310-362	MOS-IC			
R400			RK73HB1J000J	CHIP R	0	J	1/16W	IC4			TC75W51FUF	MOS-IC			
R402			RK73HB1J330J	CHIP R	33	J	1/16W	IC5			TLV2381IDBV	MOS-IC			
R404-406			RK73HB1J474J	CHIP R	470K	J	1/16W	IC100			TA75W01FUF	MOS-IC			
R407			RK73HB1J473J	CHIP R	47K	J	1/16W	IC200,201			TLV2381IDBV	MOS-IC			
R408			RK73GB2A100J	CHIP R	10	J	1/10W	IC202			TK10931VTL-G	ANALOGUE IC			
R409			RK73GB2A000J	CHIP R	0	J	1/10W	IC203			MCP6021-E/OT	MOS-IC			
R410-412			RK73HB1J474J	CHIP R	470K	J	1/16W	IC400			TK11250CUCB	MOS-IC			
R413			RK73HB1J102J	CHIP R	1.0K	J	1/16W	IC401			TC75S51FE(F)	MOS-IC			
R415			RK73HB1J102J	CHIP R	1.0K	J	1/16W	IC402			XC9101D09AK-G	MOS-IC			
R417			RK73HB1J154J	CHIP R	150K	J	1/16W	IC403			TK71733S	BI-POLAR IC			
R418			RK73HB1J102J	CHIP R	1.0K	J	1/16W	IC404			TC75W51FUF	MOS-IC			
R419,420			RK73HB1J473J	CHIP R	47K	J	1/16W	Q1			EMD9	TRANSISTOR			
R421			RK73HB1J102J	CHIP R	1.0K	J	1/16W	Q2			RT1P144U-T111	TRANSISTOR			
R422			RK73HB1J474J	CHIP R	470K	J	1/16W	Q3			2SC5383-T111	TRANSISTOR			
R423			RK73HB1J123J	CHIP R	12K	J	1/16W	Q4			2SC5636	TRANSISTOR			
R424			RK73HH1J334D	CHIP R	330K	D	1/16W	Q6			2SC5383-T111	TRANSISTOR			
R425			RK73HH1J223D	CHIP R	22K	D	1/16W	Q7			SSM6L05FU-F	FET			
R426			RK73HB1J100J	CHIP R	10	J	1/16W	Q8			2SK508NV(K52)	FET			
R427			RK73HB1J391J	CHIP R	390	J	1/16W	Q9			2SJ347F	FET			
R428			RK73HB1J821J	CHIP R	820	J	1/16W	Q10			2SK508NV(K52)	FET			
R429,430			RK73GB2A000J	CHIP R	0	J	1/10W	Q11			2SC5636	TRANSISTOR			
R435			RK73HB1J104J	CHIP R	100K	J	1/16W	Q12			2SK879-F(Y)	FET			
R436			RK73HB1J102J	CHIP R	1.0K	J	1/16W	Q13			SSM3K15TE(F)	FET			
R438			RK73GB2A000J	CHIP R	0	J	1/10W	Q100			2SC5636	TRANSISTOR			
R439			RK73HB1J273J	CHIP R	27K	J	1/16W	Q102			2SK3077F	FET			
R450			RK73HB1J000J	CHIP R	0	J	1/16W	Q103			RD01MUS1-T113	FET			
R452			RK73HB1J102J	CHIP R	1.0K	J	1/16W	Q104			2SC5383-T111	TRANSISTOR			
R490			RK73HB1J000J	CHIP R	0	J	1/16W	Q105			RT1N441U-T111	TRANSISTOR			
R498,499			RK73HB1J000J	CHIP R	0	J	1/16W	Q106			RD07MVS1BT122	FET			
R500,501			RK73HB1J103J	CHIP R	10K	J	1/16W	Q107			2SK1824-A	FET			
S1		S70-0483-05	TACT SWITCH					Q109			SSM3K15TE(F)	FET			
D1		HSC119	DIODE					Q110			EMD5	TRANSISTOR			
D2 ,3		HVC131	DIODE					Q201			2SC5108(Y)F	TRANSISTOR			
D4		DA221	DIODE					Q202			2SC4215-F(Y)	TRANSISTOR			
D5 ,6		HVC131	DIODE					Q203			3SK318	FET			
D7		HSC119	DIODE					Q204			3SK294-FP	FET			
D8		1SV325F	VARIABLE CAPACITANCE DIODE					Q401-403			SSM6L05FU-F	FET			
D9		1SV282-F	VARIABLE CAPACITANCE DIODE					Q404			SSM5H01TU-F	FET			
D12		1SV282-F	VARIABLE CAPACITANCE DIODE					Q405			2SA1955A-F	TRANSISTOR			
D13		HVC376B	VARIABLE CAPACITANCE DIODE					Q406			UMG9N	TRANSISTOR			
D14 -17		1SV282-F	VARIABLE CAPACITANCE DIODE					TH100			ERTJ0EV104H	THERMISTOR			
D18		1SV278F	VARIABLE CAPACITANCE DIODE												
D100		HSC277	DIODE												
D103		HZU2ALL	ZENER DIODE												
D104,105		HVC131	DIODE												
D106		HZU5CLL	ZENER DIODE												


NX-200(S)

EXPLODED VIEW

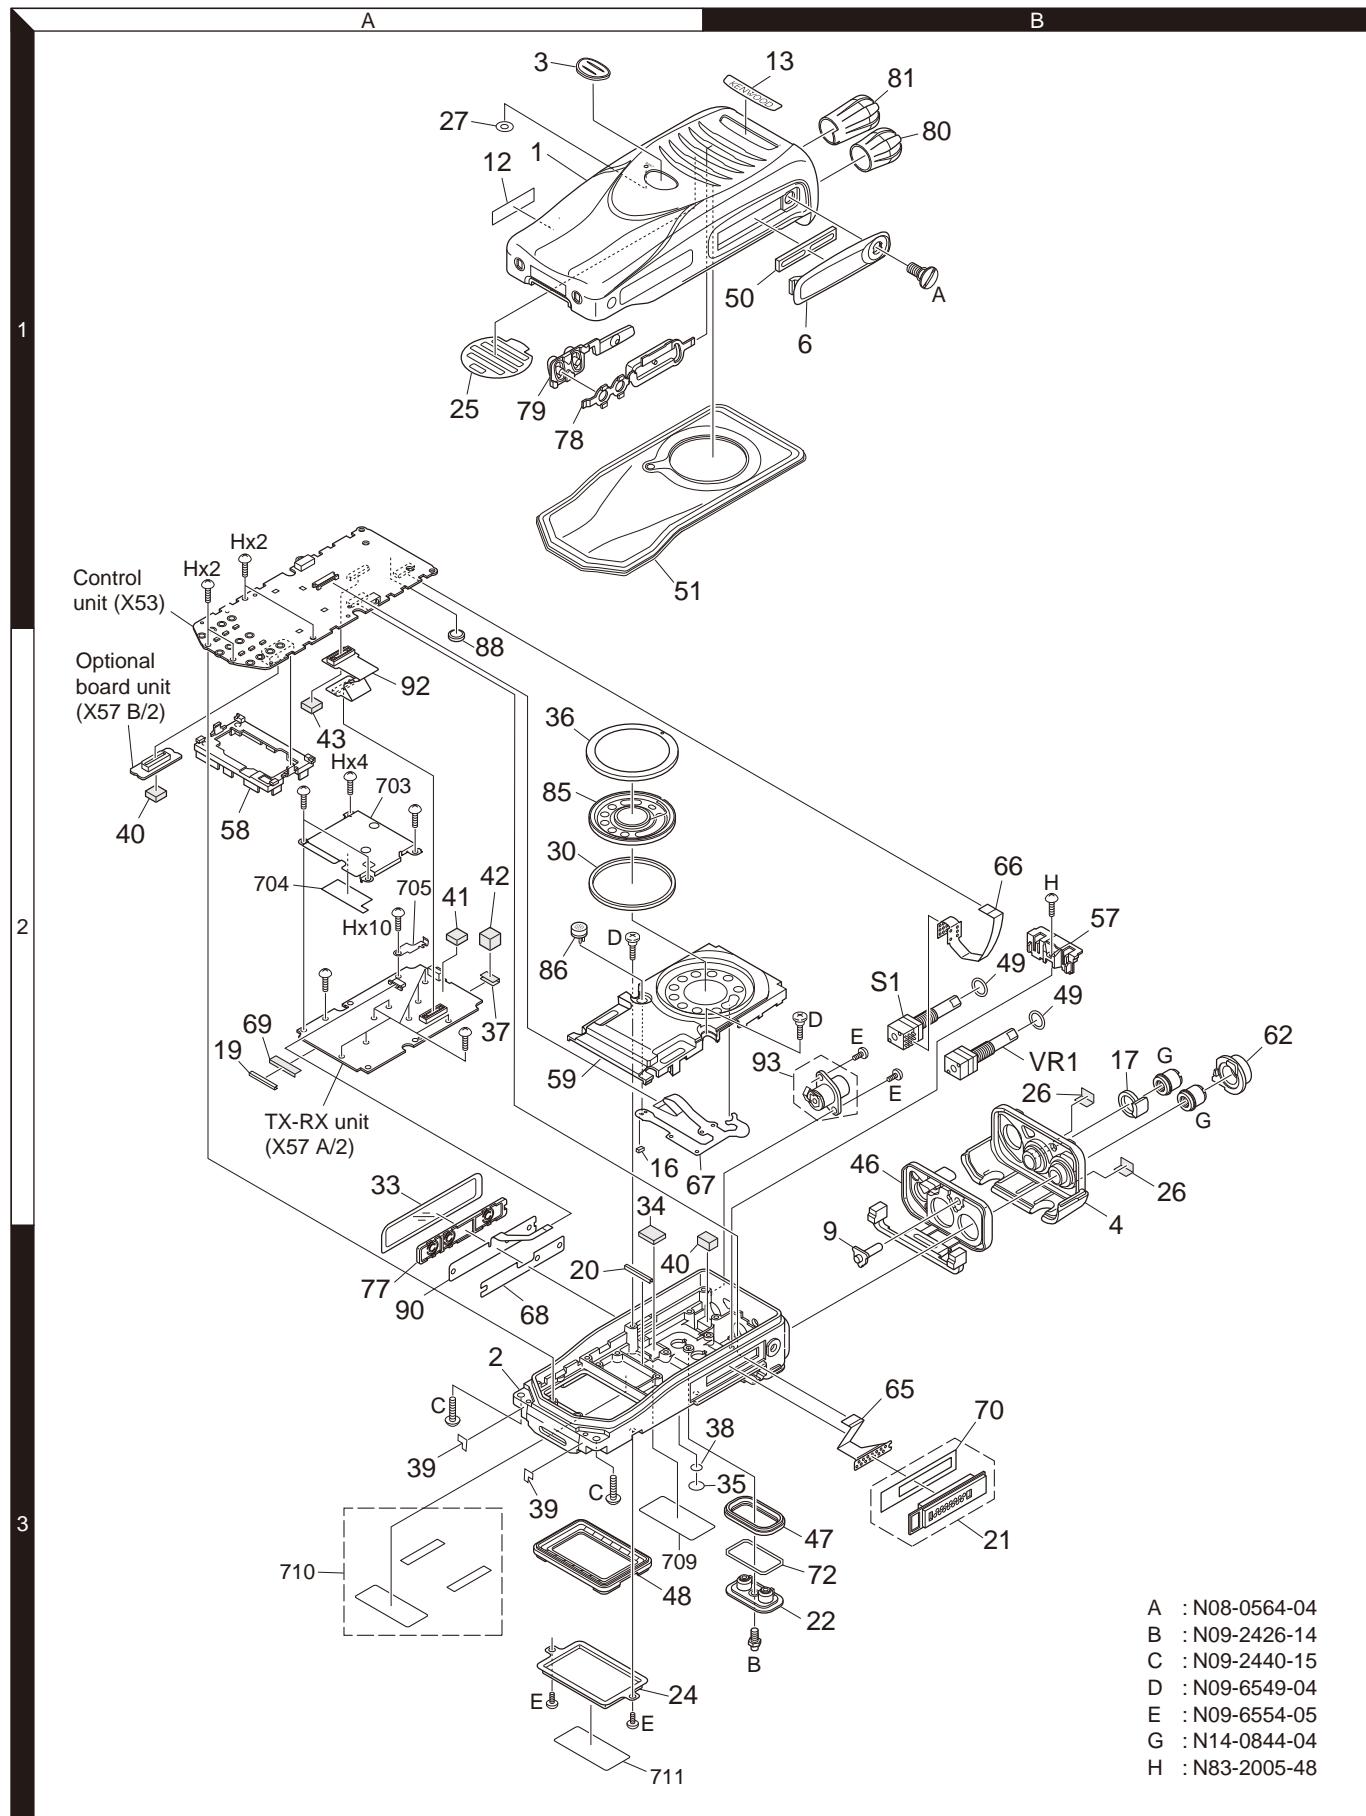

Parts with the exploded numbers larger than 700 are not supplied.

PACKING

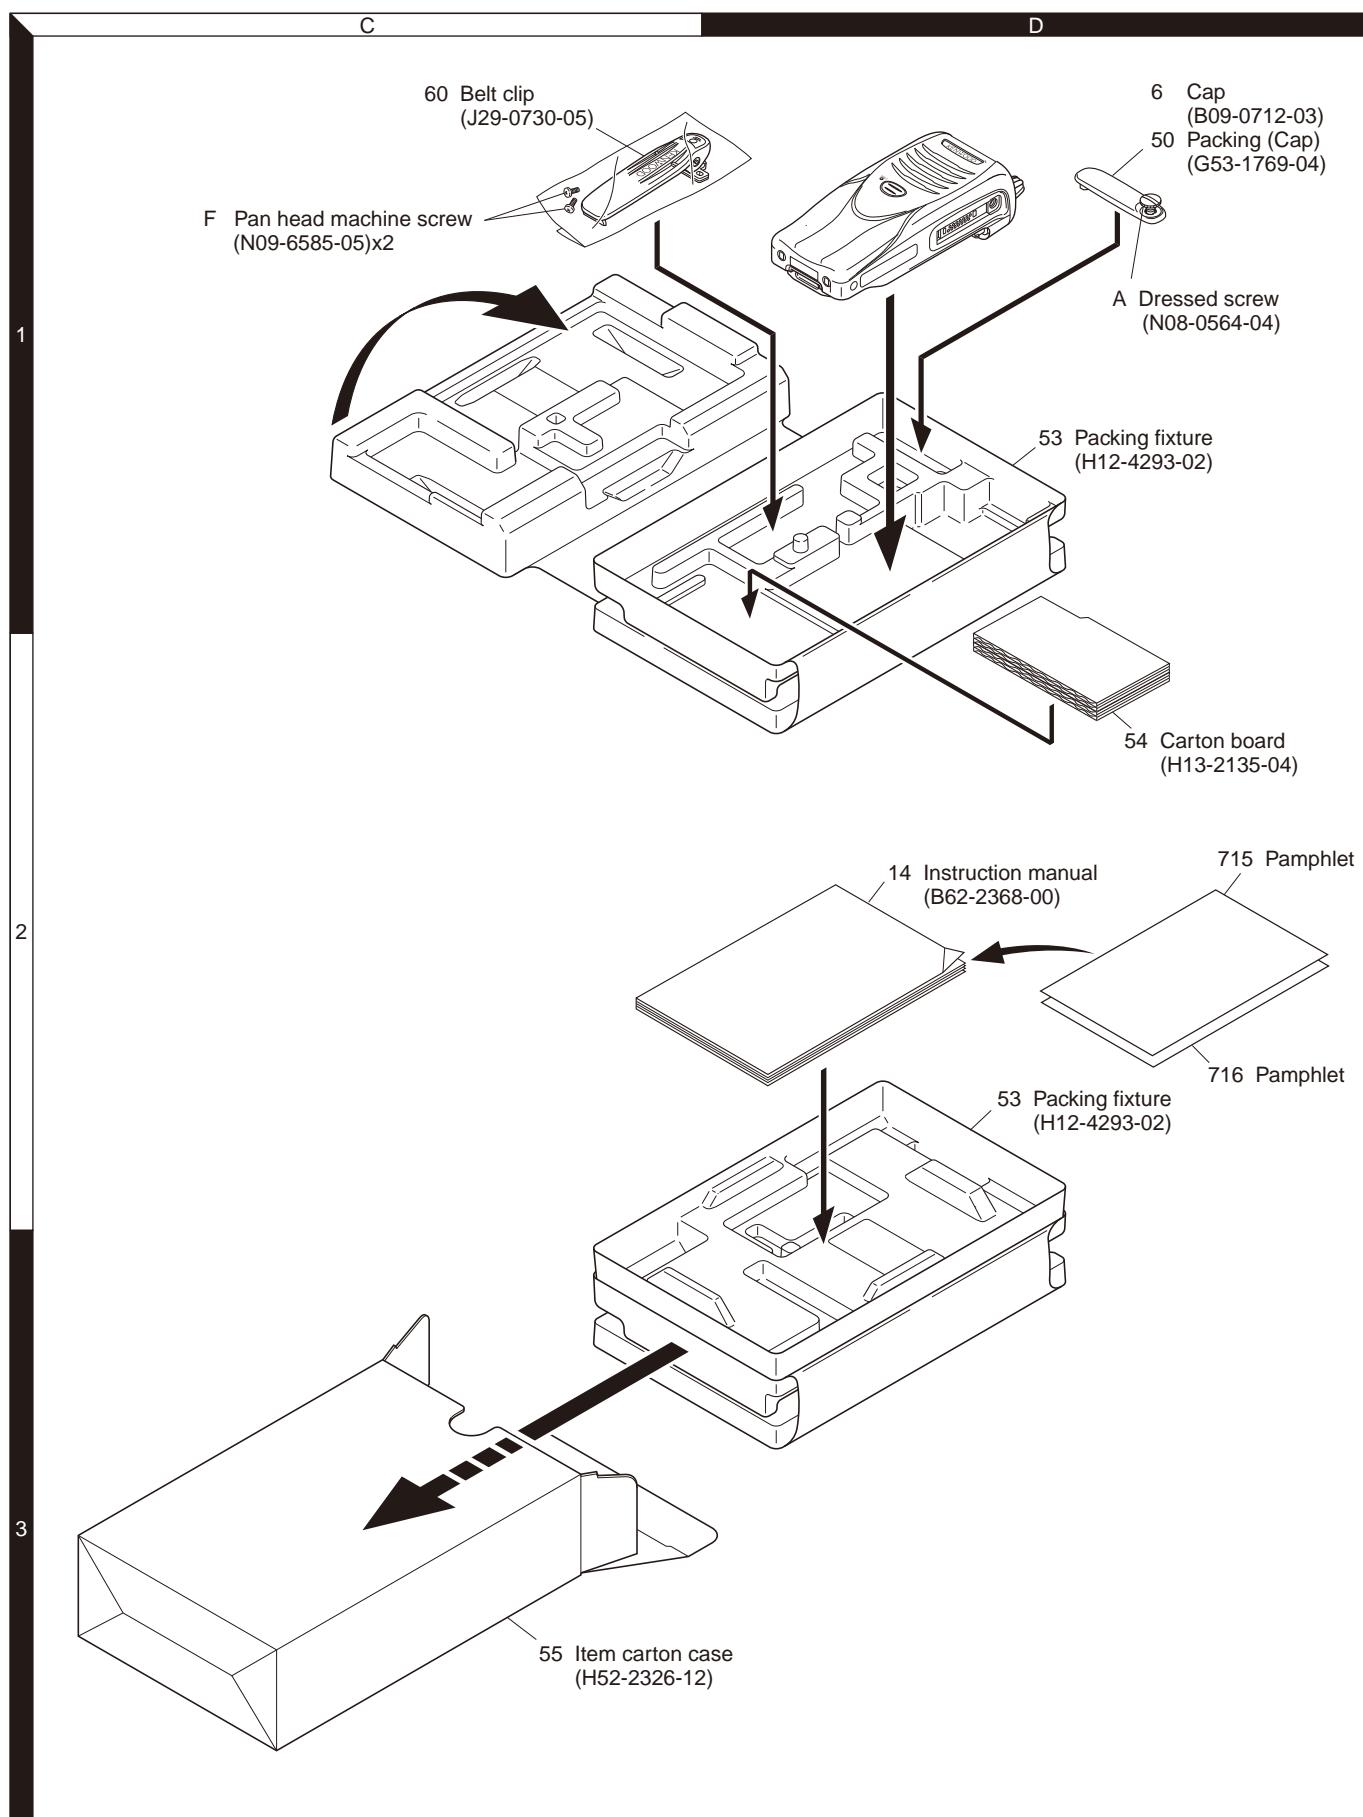

Parts with the exploded numbers larger than 700 are not supplied.

TROUBLE SHOOTING

Fault Diagnosis of the BGA (Ball Grid Array) IC

■ Overview

A flowchart for determining whether or not the transceiver can be powered on due to broken BGA parts.

■ BGA parts

ASIC (IC108), DSP (IC102), FLASH (IC101), SRAM (IC103)

When the BGA IC is problematic, please bring the printed circuit board (X53-4432-77) in for service. Various ESN/default adjustment values are written on the printed circuit board for service.

Additionally various ESN stickers are included. (Please refer to pages 34 and 35.)

Button type lithium battery (W09-0971-05) does not belong to the printed circuit board for service. Please use the part which has been attached to the printed circuit board. After the printed circuit board has been readjusted, please attach any ESN stickers to the chassis. When "ESN Validation" is used with NXDN Trunking, you must modify the ESN register.

● Checking power supply voltage

Checking voltage	
Points to be checked	Normal voltage
33M IC404 (3 pin)	3.3V
15M IC717 (4 pin)	1.5V
33A IC406 (5 pin)	3.3V
31BU IC416 (3 pin)	3.1V
Power supply of each device is connected through the coil. [ASIC] 33M: L714, 15M: L715, 33A: L716 [DSP] 33M: L712, 15M: L711 [FLASH] 33M: L717 [SRAM] 31BU: L710	

When an abnormal value is confirmed.

Checking for an abnormal point	
33M has an abnormal voltage. [ASIC]	Remove L714 to check the voltage of the 33M. If the voltage becomes normal, the ASIC is broken.
[DSP]	Remove L712 to check the voltage of the 33M. If the voltage becomes normal, the DSP is broken.
[FLASH]	Remove L717 to check the voltage of the 33M. If the voltage becomes normal, the FLASH is broken.
15M has an abnormal voltage. [ASIC]	Remove L715 to check the voltage of the 15M. If the voltage becomes normal, the ASIC is broken.
[DSP]	Remove L711 to check the voltage of the 15M. If the voltage becomes normal, the DSP is broken.
33A has an abnormal voltage. [ASIC]	Remove L716 to check the voltage of the 33A. If the voltage becomes normal, the ASIC is broken.
31BU has an abnormal voltage. [SRAM]	Remove L710 to check the voltage of the 31BU. If the voltage becomes normal, the SRAM is broken.
If the voltage is not corrected, there is a problem other than the BGA parts.	
The BGA parts are not broken.	
If the /FRST is always 0V, the ASIC is broken. If the /FRST repeats 3.3V and 0V at intervals, The ASIC, FLASH and SRAM may be broken.	

● Checking the clock

Checking the clock	
Points to be checked	Normal voltage (3.3V)
18.432MHz ASIC side R158	18.432MHz
ASIC & DSP side R159	18.432MHz
32.768kHz IC106 (1 pin)	32.768kHz

When a normal value is confirmed.

When an abnormal value is confirmed.

● Checking the Reset/Control signal

Checking the control signal input to the ASIC	
Points to be checked	Normal voltage
RESET IC105 (4 pin)	3.3V
/BINT Q401 (6 pin)	3.3V
/PSW Q402 (3 pin)	3.3V

When a normal value is confirmed.

When an abnormal value is confirmed.

Checking the control signal output from the ASIC


Checking the control signal output from the ASIC	
Points to be checked	Normal voltage
/FRST C110	3.3V

When a normal value is confirmed.


When an abnormal value is confirmed.

If the /FRST is always 0V, the ASIC is broken. If the /FRST repeats 3.3V and 0V at intervals, The ASIC, FLASH and SRAM may be broken.

TROUBLE SHOOTING

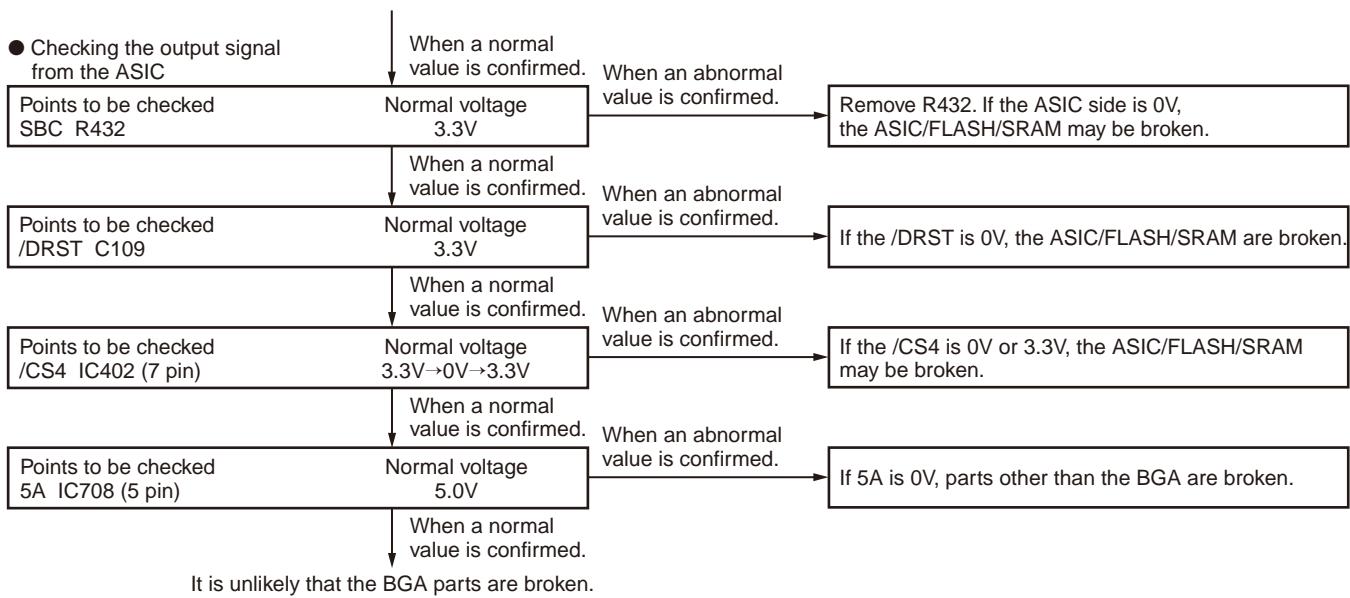

● When the LED color changes red and orange alternately.

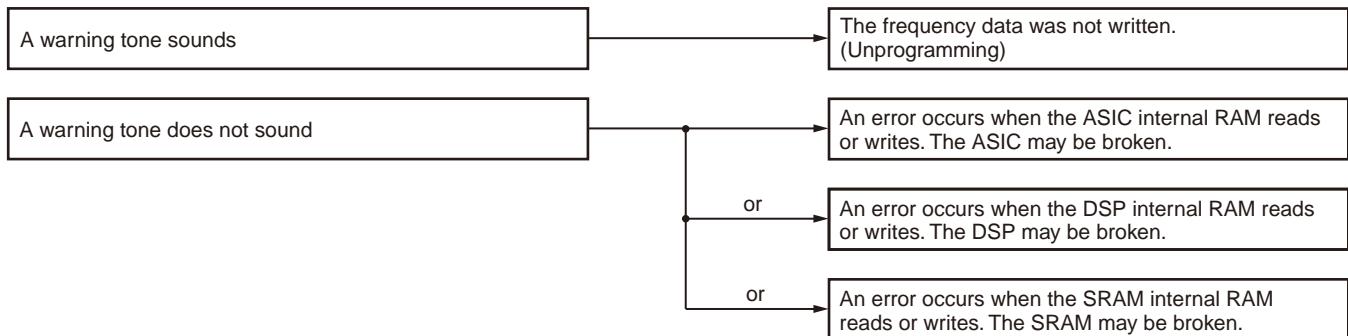

■ Descriptions of signal names

- | | |
|---|---------------------|
| 1) RST(RESET) : ASIC reset signal | LOW → Reset |
| 2) /BINT : Battery final voltage monitoring | LOW → Final voltage |
| 3) /PSW : Power switch signal | LOW → ON |
| 4) /FRST : FLASH reset signal | LOW → Reset |
| 5) SBC : Switch B control | HIGH → ON |
| 6) /DRST : DSP reset signal | LOW → Reset |
| 7) /CS4 : LCD controller chip select signal | LOW → Active |
| 8) 5A : Analog peripheral control 5.0V power supply | |


TROUBLE SHOOTING

Replacing Control Unit

■ Control unit Information

Model Name	Original Control unit Number	For Service Control unit Number
NX-200(S) (K type)	X53-4432-75	X53-4432-77

■ Method of confirming "Original Control unit" and "Service Control unit"

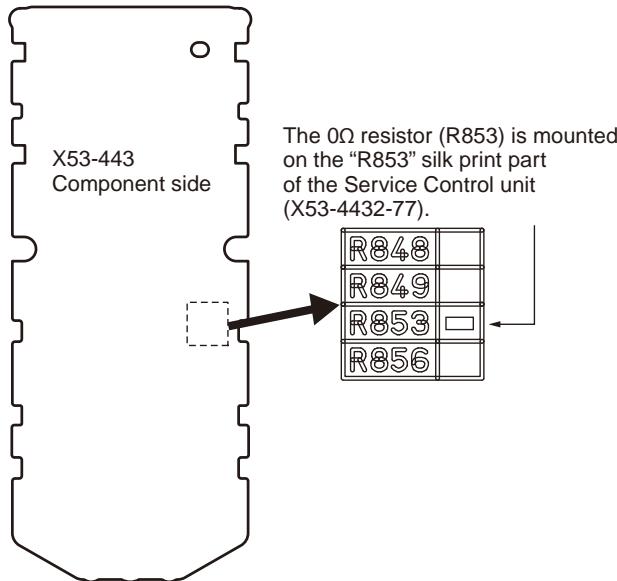

X53-443	R848	R849	R853	R856
2-75	0Ω	0Ω	(None)	(None)
2-77	0Ω	0Ω	0Ω	(None)

Note:

- The 0Ω resistor (R848, R849 and R853) is used to differentiate the destination with a visual check. These are not connected with any PCB pattern; they are specifically for production control. There is no need to change the mount of these resistors.
- There is no difference between the schematic diagram of the Service Control unit (X53-4432-77) and the schematic diagram of the original Control unit (X53-4432-75). (R848, R849 and R853 are connected with GND (ground) only.)

■ Supplied Accessories of "Service Control unit"

Item (Including Part Number)	Quantity
	E
Control Unit (X53-443)	1
Kenwood ESN Label	1
NXDN ESN Label	1
MPT ESN Label	1
Addendum (B59-2625-XX)	1

Note:

- The service control unit of the NX-200(S)(K type) use the service control unit of the NX-200S (E type).

■ "Service Control unit" Data

The following data is written on the service control unit:

Data Type	Description
Firmware	NX-200/300 E type Firmware.
FPU Data (PC programming mode)	X53-443 (NX-200S) E type data.
Various Adjustment Data (PC Test mode)	General adjustment values for the X53-443 (NX-200S).
Kenwood ESN	Model Name: [X53-443] NX-200SS Type: E The same number as the Kenwood ESN label is written.
NXDN ESN/MPT ESN	The same number as the NXDN ESN/MPT ESN is written.

■ After Changing the PCB



- After changing the printed circuit board, write the up-to-date Firmware following the instructions in the "RE-ALIGNMENT - 4.Firmware Programming Mode".
- Using the KPG-111D, select your desired item (Model Name and Frequency) from the Model> Product Information menu, then use Program> Write Data to the Transceiver to write the FPU data (PC Programming mode). When writing to the transceiver, a Warning Message, corresponding to the item selected, appears. Click [OK] to continue writing the data.
- Enter Program> Test Mode, then adjust the various adjustment data (PC Test Mode) as described in the "ADJUSTMENT".
- Attach the new labels corresponding to the new printed circuit board. (Refer to the images on page 35 for label placement.)
- If necessary, write the FPU data used by the customer with the KPG-111D.

TROUBLE SHOOTING

Note:

- When using the ESN Validation function of NXDN Trunking, the NXDN ESN number changes when the circuit board is changed (the number is written on the circuit board); the NXDN Trunking System cannot be accessed. Use the KPG-110SM on the NXDN Trunking System side to reprogram the NXDN ESN number.

- When a new printed circuit board is used, the Kenwood ESN changes, as does the Transceiver Information display of the KPG-111D, but this does not have any effect on the operation of the transceiver.
- If changing to the original Kenwood ESN, NXDN ESN and MPT ESN, please contact our service center.

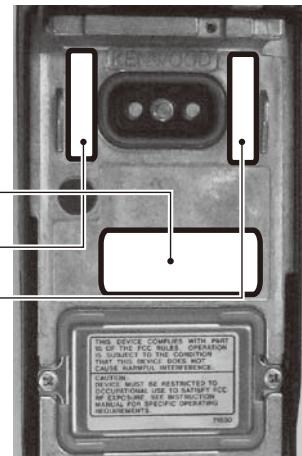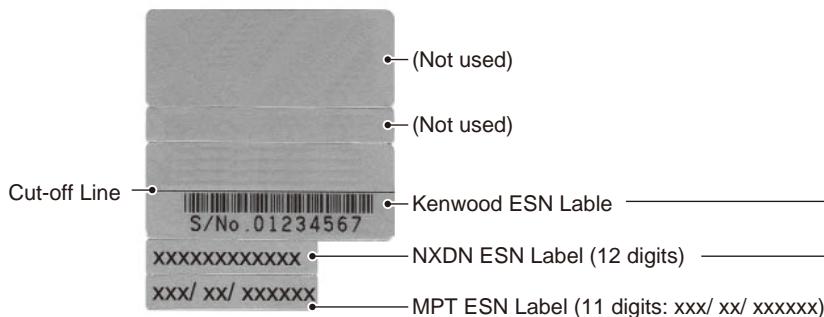

Note: A UPC code and UPC barcode is not printed on the Kenwood ESN Label. If necessary, cut the label at the cut-off line and attach only the serial number.

NX-200(S)

ADJUSTMENT

PC Test Mode

Used to check the transceiver using the PC.
This feature is included in the FPU.

■ Frequency and Signaling

The transceiver has been adjusted for the frequencies shown in the following table. When required, readjust them following the adjustment procedure to obtain the frequencies you want in actual operation.

• Test frequency

CH	RX (MHz)	TX (MHz)
1	155.05000	155.10000
2	136.05000	136.10000
3	173.95000	173.90000
4	155.00000	155.00000
5	155.20000	155.20000
6	155.40000	155.40000
7~16	-	-

• Analog mode signaling

No.	RX	TX
1	None	None
2	None	100Hz Square Wave
3	LTR Data: AREA=0, GOTO=12 HOME=12 ID=47, FREE=25	LTR Data: AREA=0, GOTO=12 HOME=12 ID=47, FREE=25
4	QT: 67.0Hz	QT: 67.0Hz
5	QT: 151.4Hz	QT: 151.4Hz
6	QT: 210.7Hz	QT: 210.7Hz
7	QT: 254.1Hz	QT: 254.1Hz
8	DQT: D023N	DQT: D023N
9	DQT: D754I	DQT: D754I
10	DTMF: 159D	DTMF: 159D
11	None	DTMF Code 9
12	2-tone: A: 304.7Hz B: 3106.0Hz	2-tone: A: 304.7Hz B: 3106.0Hz
13	Single Tone: 979.9Hz	Single Tone: 979.9Hz
14	None	Single Tone: 1000Hz
15	None	MSK
16	MSK	MSK

• NXDN mode signaling

No.	RX	TX
1	RAN1	RAN1
2	None	PN9
3	RAN1	Maximum deviation pattern
7	None	FSW+PN9

RAN: Radio Access Number

PN9: Pseudo-Random Pattern (for production only)

PC Tuning Mode

■ Preparations for tuning the transceiver

Before attempting to tune the transceiver, connect the unit to a suitable power supply.

Whenever the transmitter is turned, the unit must be connected to a suitable dummy load (i.e. power meter).

The speaker output connector must be terminated with a 8Ω dummy load and connected to an AC voltmeter and an audio distortion meter or a SINAD measurement meter at all times during tuning.

■ 5 reference level adjustments frequency

Tuning point	RX (MHz)	TX (MHz)
Low	136.05000	136.10000
Low'	145.55000	145.60000
Center	155.05000	155.10000
High'	164.55000	164.60000
High	173.95000	173.90000

ADJUSTMENT

Adjustment item supplement

Adjustment Item	Description
Counterclockwise Volume	"Counterclockwise Volume" is adjusted at the minimum volume position. "Clockwise Volume" is adjusted at the maximum volume position. These adjustments can correct the volume variation.
Clockwise Volume	Both "Counterclockwise Volume" and "Clockwise Volume" must be adjusted. (The curve data of volume is applied.)
Receive Assist	The lock voltage of VCO (Receive) is adjusted. This item must be adjusted before all adjustment items for receiver section are adjusted.
Transmit Assist	The lock voltage of VCO (Transmit) is adjusted. This item must be adjusted before all adjustment items for transmitter section are adjusted.
Frequency	Frequency stability is adjusted under receiving condition with SSG. The SSG needs 0.003ppm accuracy so please use a standard oscillator if necessary. This item can be adjusted only in PC Test Mode so that the adjustment value is not changed easily.
High Transmit Power	High Transmit Power is adjusted.
Low Transmit Power	Low Transmit Power is adjusted.
Balance	The transmit audio frequency response is adjusted. This item is adjusted so that the deviation of 2kHz becomes the same deviation of 20Hz. This item must be adjusted before all adjustment items for deviations are adjusted.
Maximum Deviation (NXDN Narrow/Very Narrow)	Maximum Deviation of NXDN (Narrow/Very Narrow) is adjusted.
Maximum Deviation (Analog Wide/Narrow)	Maximum Deviation of Analog (Wide/Narrow) is adjusted. This item must be adjusted before all adjustment items for tone deviations are adjusted. Note: "Maximum Deviation (Analog Narrow)" must be adjusted before "CW ID Deviation (NXDN Very Narrow)" is adjusted.
QT Deviation	QT tone deviation is adjusted.
DQT Deviation	DQT tone deviation is adjusted.
LTR Deviation	LTR tone deviation is adjusted.
DTMF Deviation	DTMF tone deviation is adjusted.
Single Tone Deviation	The deviation of Single Tone used in "2-tone" is adjusted.
MSK Deviation	MSK tone deviation is adjusted.
CW ID Deviation	CW ID tone deviation is adjusted. CW ID is used to inform the others who is transmitting on a 6.25-kHz spacing channel. (In FCC rule, Analog mode or CW ID is required for each channel-spacing.)
VOX 1	VOX sensitivity at "VOX 1" is adjusted.
VOX 10	VOX sensitivity at "VOX 10" is adjusted.
Sensitivity 1	Band-Pass Filter is adjusted. The performance of Receive Sensitivity is improved.
Sensitivity 2	The gain of RF amplifier is adjusted. The performance of the interfering wave is improved.
RSSI Reference	The minimum RSSI level for scan stop is adjusted.
Open Squelch	The squelch level at level "5" is adjusted.
Low RSSI	Both "Low RSSI" and "High RSSI" must be adjusted. (The curve data of RSSI level is applied.)
High RSSI	
Tight Squelch	The squelch level at level "9" is adjusted.
Battery Warning Level	Battery Warning Level (LED blinking level) is adjusted. Battery Warning Level minus 0.4V is the transmission inhibited level.

NX-200(S)

ADJUSTMENT

Adjustment item

Order	Adjustment item	Analog Wide	Analog Narrow	NXDN Narrow	NXDN Very Narrow	Adjust item Number
		Adjustment range				
1	Counterclockwise Volume	1 point ADJ				Common Section 2
		1~256				
2	Clockwise Volume	1 point ADJ				Common Section 3
		1~256				
3	Receive Assist	5 point ADJ				Common Section 4
		1~4096				
4	Transmit Assist	5 point ADJ				Common Section 4
		1~4096				
5	High Transmit Power	-	5	-	-	Transmitter Section 1
		1~1024				
6	Low Transmit Power	-	5	-	-	Transmitter Section 2
		1~1024				
7	Balance	-	5	-	-	Transmitter Section 3
		1~256				
8	Maximum Deviation (NXDN)	-	-	5	5	Transmitter Section 4
		1~1024				
9	Maximum Deviation (Analog)	5	5	-	-	Transmitter Section 5
		1~1024				
10	QT Deviation	1	1	-	-	Transmitter Section 6
		1~1024				
11	DQT Deviation	1	1	-	-	Transmitter Section 7
		1~1024				
12	LTR Deviation	1	1	-	-	Transmitter Section 8
		1~1024				
13	DTMF Deviation	1	1	-	-	Transmitter Section 9
		1~1024				
14	Single Tone Deviation	1	1	-	-	Transmitter Section 10
		1~1024				
15	MSK Deviation	1	1	-	-	Transmitter Section 11
		1~1024				
16	CW ID Deviation	-	-	-	1	Transmitter Section 12
		1~1024				
17	VOX 1	1 point ADJ				Transmitter Section 13
		1~256				
18	VOX 10	1 point ADJ				Transmitter Section 14
		1~256				
19	Sensitivity 1	-	5	-	-	Receiver Section 2
		1~256				
20	Sensitivity 2	-	5	-	-	Receiver Section 3
		1~256				
21	RSSI Reference	5	5	- *1	5	Receiver Section 4
		1~256				

ADJUSTMENT

Order	Adjustment item	Analog Wide	Analog Narrow	NXDN Narrow	NXDN Very Narrow	Adjust item Number
		Adjustment range				
22	Open Squelch	5	5	- *1	5	Receiver Section 5
		1~256				
23	Low RSSI	5	5	- *1	5	Receiver Section 6
		1~256				
24	High RSSI	5	5	- *1	5	Receiver Section 7
		1~256				
25	Tight Squelch	5	5	-	-	Receiver Section 8
		1~256				
26	Battery Warning Level	1 point ADJ				Transmitter Section 15
		1~256				

*1: Because NXDN Narrow is adjusted by adjusting Analog Narrow, it is not necessary to adjust NXDN Narrow.

NX-200(S)

ADJUSTMENT

Test Equipment Required for Alignment

Test Equipment	Major Specifications	
1. Standard Signal Generator (SSG)	Frequency Range Modulation Output When performing the Frequency adjustment, the following accuracy is necessary. • 0.003ppm Use a standard oscillator for adjustments, if necessary.	136 to 174MHz Frequency modulation and external modulation –127dBm/0.1µV to greater than –20dBm/22.4mV
2. Power Meter	Input Impedance Operation Frequency Measurement Capability	50Ω 136 to 174MHz Vicinity of 10W
3. Deviation Meter	Frequency Range	136 to 174MHz
4. Digital Volt Meter (DVM)	Measuring Range Input Impedance	10mV to 10V DC High input impedance for minimum circuit loading
5. Oscilloscope		DC through 30MHz
6. High Sensitivity Frequency Counter	Frequency Range Frequency Stability	10Hz to 1000MHz 0.2ppm or less
7. Ammeter		5A
8. AF Volt Meter (AF VM)	Frequency Range Voltage Range	50Hz to 10kHz 1mV to 10V
9. Audio Generator (AG)	Frequency Range Output	50Hz to 5kHz or more 0 to 1V
10. Distortion Meter	Capability Input Level	3% or less at 1kHz 50mV to 10Vrms
11. 8Ω Dummy Load		Approx. 8Ω, 3W
12. Regulated Power Supply		5V to 10V, approx. 3A Useful if ammeter equipped

■ Antenna connector adapter

The antenna connector of this transceiver uses an SMA terminal.

Use an antenna connector adapter [SMA(f) – BNC(f) or SMA(f) – N(f)] for adjustment. (The adapter is not provided as an option, so buy a commercially-available one.)


■ Nut wrench

In order to turn the volume nut and the channel selector nut, use a recommendation tool.

Kenwood part No.: W05-1123-00

■ Battery jig (W05-1370-00)

Connect the power cable properly between the battery jig installed in the transceiver and the power supply, and be sure output voltage and the power supply polarity prior to switching the power supply ON, otherwise over voltage and reverse connection may damage the transceiver, or the power supply or both.

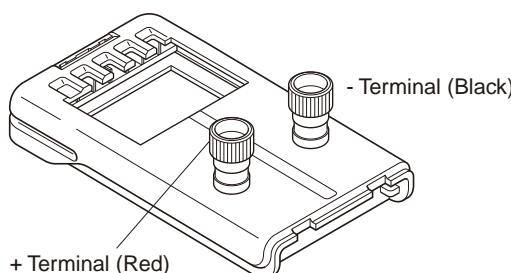


Note:

- When using the battery jig, you must measure the voltage at the terminals of the battery jig. Otherwise, a slight voltage drop may occur within the power cable, between the power supply and the battery jig, especially while the transceiver transmits.
- The battery jig is detected as "Li-Ion High Capacity Battery".

Li-Ion High Capacity Battery: R1=Open

Li-Ion Normal Capacity Battery: R1=560kΩ

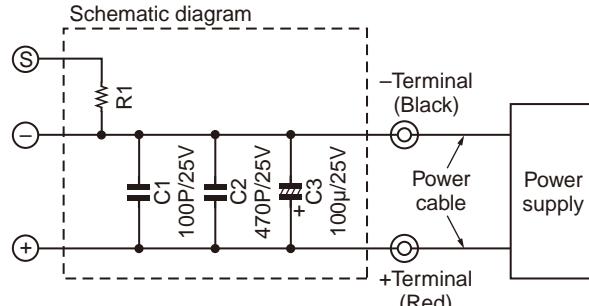

ADJUSTMENT

■ Universal connector


Use the interface cable (KPG-36/36A) for PC tuning or the lead wire with plug (E30-3287-28) and screw (N08-0535-08) for panel tuning. Connect the plug to the universal connector of the transceiver and tighten the screw.

The lead wire with plug (E30-3287-28) and screw (N08-0535-08) terminals are as follows. Numbers are universal connector terminal numbers.



Caution

- When connecting the plug to the universal connector of the transceiver, a short circuit may occur. To prevent this, be sure to turn the transceiver POWER switch off.
- Since the RX AF output is a BTL output, there is a DC component. Isolate this with a capacitor or transformer as shown in the figure.
- Do not connect an instrument between red or black and GND.

• Universal connector

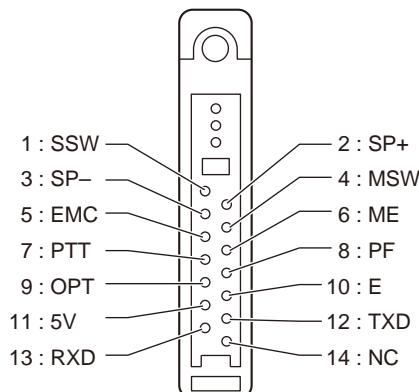

• Panel tuning

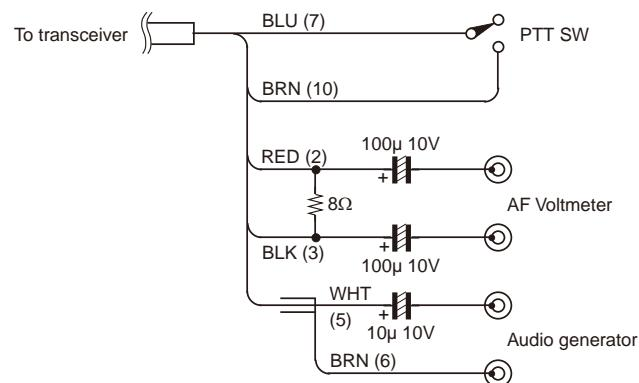
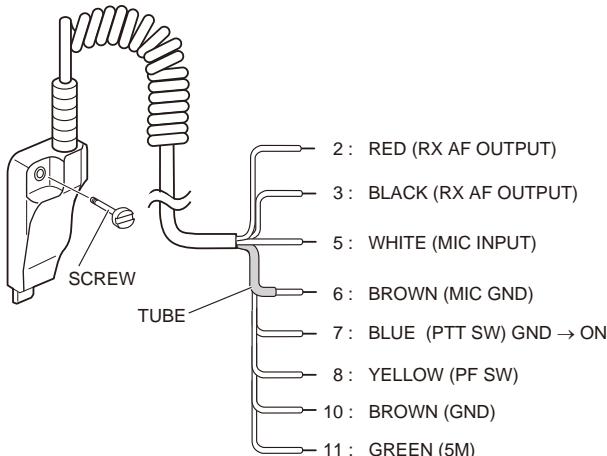


Note: Pin 1 (SSW) and Pin 4 (MSW) are connected to Pin 10 (GND) to active External SP and External MIC.

• PC tuning

Connect the wires to the PCB in the connector case of interface cable.

For output the wires out of the connector case, need to process the connector case.

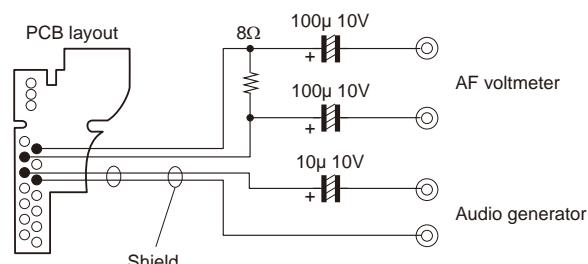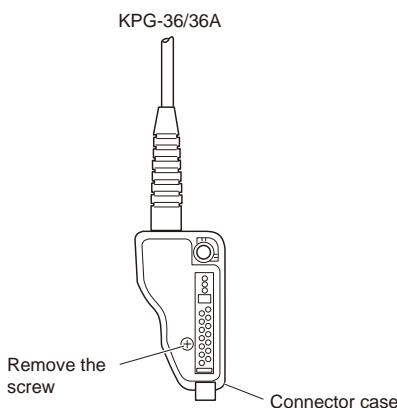

NX-200(S)

ADJUSTMENT

Radio Check Section

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. Frequency check	1) Test Channel Channel: 1 Test Signaling Mode: Analog Signaling: 1 PTT: Press [Transmit] button.	f. counter		ANT			Check an internal temperature of radio within $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$.	155.099923~155.100077MHz ($\pm 0.5\text{ppm}$ @155.1MHz)
2. High power check (Batt: 7.5V)	1) Test Channel Channel: 1 Test Signaling Mode: Analog Signaling: 1 PTT: Press [Transmit] button.	Power meter Ammeter					Check	4.5W~5.5W 2.0A or less
	2) Test Channel Channel: 2 Test Signaling Mode: Analog Signaling: 1 PTT: Press [Transmit] button.							
	3) Test Channel Channel: 3 Test Signaling Mode: Analog Signaling: 1 PTT: Press [Transmit] button.							
3. Low power check (Batt: 7.5V)	1) Test Channel Channel: 1 Test Signaling Mode: Analog Signaling: 1 PTT: Press [Transmit] button.							0.7W~1.2W 1.0A or less
	2) Test Channel Channel: 2 Test Signaling Mode: Analog Signaling: 1 PTT: Press [Transmit] button.							
	3) Test Channel Channel: 3 Test Signaling Mode: Analog Signaling: 1 PTT: Press [Transmit] button.							
4. MIC sensitivity check	1) Test Channel Channel: 1 Test Signaling Mode: Analog Signaling: 1 AG: 1kHz PTT: Press [Transmit] button.	Deviation meter Oscilloscope AG AF VM		ANT Universal connector			Adjust AG input to get a standard MOD.	12.5mV \pm 5.8mV

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
5. Sensitivity check	1) Test Channel Channel: 1 Test Signaling Mode: Analog Signaling: 1 SSG output Wide: -117dBm (0.32μV) (MOD: 1kHz/±3kHz) Narrow: -117dBm (0.32μV) (MOD: 1kHz/±1.5kHz)	SSG AF VM Oscilloscope Distortion meter 8Ω Dummy load		ANT Universal connector			Check	12dB SINAD or more

Common Section

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. Setting	1) DC voltage: 7.5V 2) SSG standard modulation [Wide] MOD: 1kHz, DEV: 3kHz [Narrow] MOD: 1kHz, DEV: 1.5kHz							
2. Counter-clockwise Volume	1) Adj item: [Counterclockwise Volume]						Turn the volume knob counterclockwise fully. Press [Apply] button to store the adjustment value.	This item is needed when the variable resistor (R31-0666-05) is replaced.
3. Clockwise Volume	1) Adj item: [Clockwise Volume]						Turn the volume knob clockwise fully. Press [Apply] button to store the adjustment value.	
4. Receive Assist	1) Adj item: [Receive Assist] 2) Adj item: [Low], [Low'], [Center], [High'], [High] Press [Apply All] button to store the adjustment value.					[◀],[▶]	[V] indicator on the PC window shows VCO lock voltage. Change the adjustment value to get VCO lock voltage within the limit of the specified voltage. Note: Confirm the VCO lock voltage approximately 3 seconds after the adjustment value is changed.	2.5V±0.1V Press [Apply All] button to store the adjustment value after all adjustment points have been adjusted.
Transmit Assist	1) Adj item: [Transmit Assist] 2) Adj item: [Low], [Low'], [Center], [High'], [High] PTT: Press [Transmit] button. Press [Apply All] button to store the adjustment value.							

NX-200(S)

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
5. Frequency adjust	<p>1) Adj item: [Frequency] SSG output : -20dBm (22.4mV) (CW (without modulation))</p> <p>Caution: Perform the frequency adjustment under the following conditions.</p> <ul style="list-style-type: none"> Temperature range of +23°C to +27°C (+73.4°F to +80.6°F). (The temperature is displayed on the Frequency adjustment screen of the KPG-111D.) Use an accuracy of 0.003ppm for the SSG. (Use a standard oscillator if necessary.) 	SSG		ANT			Press [Start] button of "Auto Tuning". Press [Apply] button to store the adjustment value after the automatic adjustment has finished.	"IF20" value = Within 0±12 digits. The value of "IF20" will become around "0" after the adjustment has finished.

Transmitter Section

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. High Transmit Power adjust (Batt: 7.5V)	<p>1) Adj item: [High Transmit Power]</p> <p>2) Adj item: [Low], [Low'], [Center], [High'], [High]</p> <p>PTT: Press [Transmit] button. Press [Apply All] button to store the adjustment value.</p>	Power meter Ammeter		ANT	[◀],[▶]	5.0W		±0.2W 2.0A or less Press [Apply All] button to store the adjustment value after all adjustment points have been adjusted.
2. Low Transmit Power adjust (Batt: 7.5V)	<p>1) Adj item: [Low Transmit Power]</p> <p>2) Adj item: [Low], [Low'], [Center], [High'], [High]</p> <p>PTT: Press [Transmit] button. Press [Apply All] button to store the adjustment value.</p>					0.8W		±0.1W 1.0A or less Press [Apply All] button to store the adjustment value after all adjustment points have been adjusted.
3. Balance adjust *2	<p>1) Adj item: [Balance] Deviation meter LPF : 3kHz HPF : OFF</p> <p>2) Adj item: [Low], [Low'], [Center], [High'], [High]</p> <p>PTT: Press [Transmit] button. Press [Apply All] button to store the adjustment value. [2kHz Sine Wave Check box]: Check while transmitting change to 2kHz.</p>	Deviation meter Oscilloscope				The Deviation of 20Hz frequency is fixed. Change the 2kHz adjustment value to become the same deviation of 20Hz within the specified range.		2kHz Tone deviation is within ±1.0% of 20Hz tone deviation. Press [Apply All] button to store the adjustment value after all adjustment points have been adjusted.

*2: Refer to the "Necessary Deviation adjustment item for each signaling and mode" table on page 49.
Balance adjustment is common with the adjustment of all signaling deviations.

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
4. Maximum Deviation (NXDN) adjust *3 [Narrow]	1) Adj item: [Maximum Deviation (NXDN Narrow)] Deviation meter LPF: 3kHz HPF: OFF 2) Adj item: [Low], [Low'], [Center], [High'], [High] PTT: Press [Transmit] button. Press [Apply All] button to store the adjustment value.	Deviation meter Oscilloscope	ANT		[◀,▶]	3056Hz	2995~3117Hz Press [Apply All] button to store the adjustment value after all adjustment points have been adjusted.	
	1) Adj item: [Maximum Deviation (NXDN Very Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] PTT: Press [Transmit] button. Press [Apply All] button to store the adjustment value.							
5. Maximum Deviation (Analog) adjust *3 [Narrow]	1) Adj item: [Maximum Deviation (Analog Narrow)] Deviation meter LPF: 15kHz HPF: OFF 2) Adj item: [Low], [Low'], [Center], [High'], [High] Press [Apply All] button to store the adjustment value.				1337Hz	1311~1363Hz Press [Apply All] button to store the adjustment value after all adjustment points have been adjusted.		

NX-200(S)

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
Maximum Deviation (Analog) adjust *3 [Wide]	1) Adj item: [Maximum Deviation (Analog Wide)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] Press [Apply All] button to store the adjustment value.	Deviation meter Oscilloscope		ANT		[◀],[▶]	Write the same adjustment value of "NXDN Deviation [Narrow]" for each adjustment point. Transmit at each adjustment point and check that the Analog deviation is between 4150Hz and 4250Hz. Deviation meter LPF: 15kHz HPF: OFF PTT: Press [Transmit] button	4150~4250Hz Press [Apply All] button to store the adjustment value after all adjustment points have been adjusted.
*3: Refer to the "Necessary Deviation adjustment item for each signaling and mode" table on page 49. Regarding Maximum Deviation (Analog), it is common with the adjustment of all analog signalings.								
6. QT Deviation adjust *4 [Narrow]	1) Adj item: [QT Deviation (Analog Narrow)] Deviation meter LPF: 3kHz HPF: OFF PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.	Deviation meter Oscilloscope		ANT		[◀],[▶]	Write the value as followings. 513 (Reference value)	0.35kHz±0.05kHz
	1) Adj item: [QT Deviation (Analog Wide)] PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.							
7. DQT Deviation adjust *4 [Narrow]	1) Adj item: [DQT Deviation (Analog Narrow)] Deviation meter LPF: 3kHz HPF: OFF PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.	Deviation meter Oscilloscope		ANT		[◀],[▶]	Write the value as followings. 415 (Reference value)	0.35kHz±0.05kHz
	1) Adj item: [DQT Deviation (Analog Wide)] PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.							

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
8. LTR Deviation adjust *4	1) Adj item: [LTR Deviation (Analog Narrow)] Deviation meter LPF: 3kHz HPF: OFF PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.	Deviation meter Oscilloscope	ANT		[◀],[▶]	Write the value as followings. 465 (Reference value)	0.75kHz±0.05kHz	
	[Wide] 1) Adj item: [LTR Deviation (Analog Wide)] PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.							
9. DTMF Deviation adjust *4	1) Adj item: [DTMF Deviation (Analog Narrow)] Deviation meter LPF: 15kHz HPF: OFF PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.				[◀],[▶]	Write the value as followings. 540 (Reference value)	1.25kHz±0.05kHz	
	[Wide] 1) Adj item: [DTMF Deviation (Analog Wide)] PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.							
10. Single Tone Deviation adjust *4	1) Adj item: [Single Tone Deviation (Analog Narrow)] Deviation meter LPF: 15kHz HPF: OFF PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.				[◀],[▶]	Write the value as followings. 513 (Reference value)	1.50kHz±0.05kHz	
	[Wide] 1) Adj item: [Single Tone Deviation (Analog Wide)] PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.							

NX-200(S)

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
11. MSK Deviation adjust *4 [Narrow]	1) Adj item: [MSK Deviation (Analog Narrow)] Deviation meter LPF: 15kHz HPF: OFF PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.	Deviation meter Oscilloscope	ANT		[◀],[▶]	Write the value as followings. 513 (Reference value)	1.50kHz±0.05kHz	3.00kHz±0.05kHz
[Wide]	1) Adj item: [MSK Deviation (Analog Wide)] PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.							
12. CW ID Deviation adjust *4 [Very Narrow]	1) Adj item: [CW ID Deviation (NXDN Very Narrow)] Deviation meter LPF: 15kHz HPF: OFF PTT: Press [Transmit] button. Press [Apply] button to store the adjustment value.					Write the value as followings. 376 (Reference value)	1.10kHz±0.10kHz	

*4: Refer to the "Necessary Deviation adjustment item for each signaling and mode" table on page 49.

13. VOX 1 adjust	1) Adj item: [VOX 1] AG: 1kHz/45mV at MIC terminal	AG		Universal connector		After apply signal from AG, press [Apply] button to store the adjustment value.		
14. VOX 10 adjust	1) Adj item: [VOX 10] AG: 1kHz/3mV at MIC terminal							
15. Battery Warning Level writing	1) Adj item: [Battery Warning Level] PTT: Press [Transmit] button.	Power meter DVM		ANT BATT terminal		[Transmit] button on the PC window. Apply 6.20V to battery terminal. Confirm that one pre-determined numeric in the range 1 to 256 appears. Press [Apply] button to store the adjustment value.		
16. Battery Warning Level check	1) Test Channel Channel: 1 Test Signaling Mode: Analog Signaling: 1 BATT terminal voltage: 6.0V while transmitting					Check	The transceiver can transmit with causing the LED to blink.	

ADJUSTMENT

■ Necessary Deviation adjustment item for each signaling and mode

The following shows the necessary adjustment items for each signaling deviation. Please read the following table like the following example. In the case of the signaling "QT (Wide)", this signaling is composed of three elements [Balance, Maximum Deviation (Analog Wide) and QT Deviation (Wide)]. Please adjust Balance and Maximum Deviation (Analog Wide) before adjusting QT Deviation (Wide).

Mode	Signaling	Necessary adjustment and order		
		Wide	Narrow	Very Narrow
Analog	Audio	Step1. Balance adjust Step2. Maximum Deviation (Analog Wide)	Step1. Balance adjust Step2. Maximum Deviation (Analog Narrow)	-
	QT	Step1. Balance adjust Step2. Maximum Deviation (Analog Wide) Step3. QT Deviation (Wide)	Step1. Balance adjust Step2. Maximum Deviation (Analog Narrow) Step3. QT Deviation (Narrow)	-
	DQT	Step1. Balance adjust Step2. Maximum Deviation (Analog Wide) Step3. DQT Deviation (Wide)	Step1. Balance adjust Step2. Maximum Deviation (Analog Narrow) Step3. DQT Deviation (Narrow)	-
	LTR	Step1. Balance adjust Step2. Maximum Deviation (Analog Wide) Step3. LTR Deviation (Wide)	Step1. Balance adjust Step2. Maximum Deviation (Analog Narrow) Step3. LTR Deviation (Narrow)	-
	DTMF	Step1. Balance adjust Step2. Maximum Deviation (Analog Wide) Step3. DTMF Deviation (Wide)	Step1. Balance adjust Step2. Maximum Deviation (Analog Narrow) Step3. DTMF Deviation (Narrow)	-
	2TONE	Step1. Balance adjust Step2. Maximum Deviation (Analog Wide) Step3. Single Tone Deviation (Analog Wide)	Step1. Balance adjust Step2. Maximum Deviation (Analog Narrow) Step3. Single Tone Deviation (Analog Narrow)	-
	MSK (FleetSync)	Step1. Balance adjust Step2. Maximum Deviation (Analog Wide) Step3. MSK Deviation (Analog Wide)	Step1. Balance adjust Step2. Maximum Deviation (Analog Narrow) Step3. MSK Deviation (Analog Narrow)	-
NXDN	Audio	-	Step1. Balance adjust Step2. Maximum Deviation (NXDN Narrow)	Step1. Balance adjust Step2. Maximum Deviation (NXDN Very Narrow)
	CW ID	-	-	Step1. Balance adjust Step2. Maximum Deviation (Analog Narrow) Step3. CW ID Deviation (NXDN Very Narrow)

- Balance is common with all the above deviation adjustments. If Balance (Transmitter Section 3) has already adjusted, please skip Step1 and adjust from Step2.
- Maximum Deviation (Analog Wide/Narrow) is common with all the analog signaling deviations and CW ID Deviation (NXDN Very Narrow). If Balance and Maximum Deviation (Analog Wide/Narrow) (Transmitter Section 5) have already adjusted, please skip Step2 and adjust from Step3.

NX-200(S)

ADJUSTMENT

Receiver Section

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. AF level setting	<p>1) Test Channel Channel: 1 Test Signaling Mode: Analog Signaling: 1 Wide/Narrow: Narrow Beat Shift: Uncheck Compander: Uncheck SSG output: -47dBm (1mV) (MOD: 1kHz/±1.5kHz)</p>	SSG DVM AF VM Dummy load		ANT Universal connector		Volume knob	Turn the Volume knob to obtain 0.63V AF output.	0.63V±0.1V
2. Sensitivity 1 adjust	<p>1) Adj item: [Sensitivity 1] 2) Adj item: [Low], [Low'], [Center], [High'], [High] Press [Apply All] button to store the adjustment value.</p> <p>3) Adj item: [Low], [Low']</p> <p>Caution: Perform the step 3 adjustments of "3. Sensitivity 2 adjust" before performing the adjustment. SSG output: -90dBm (7.08μV) (MOD: 1kHz/±1.5kHz) Press [Apply All] button to store the adjustment value.</p>	SSG AF VM Oscilloscope		ANT Universal connector	[◀],[▶]	<p>Write the value as followings. [Low] : 10 (Preset) [Low'] : 50 (Preset) [Center] : 95 (Fixed) [High'] : 135 (Fixed) [High] : 180 (Fixed)</p> <p>Increase the adjustment value from step 2 adjustment value (preset value) of "2. Sensitivity 1 adjust".</p>		
3. Sensitivity 2 adjust	<p>1) Adj item: [Sensitivity 2] 2) Adj item: [Low], [Low'], [Center], [High'], [High] Press [Apply All] button to store the adjustment value.</p> <p>3) Adj item: [Low], [Low'] Press [Apply All] button to store the adjustment value.</p>					<p>Write the value as followings. [Low] : 180 (Fixed) [Low'] : 180 (Fixed) [Center] : 175 (Fixed) [High'] : 175 (Fixed) [High] : 185 (Fixed)</p> <p>Write the value as follows. [Low] : 256 [Low'] : 256</p>		<p>Caution: This is the preadjustment for the adjustment of "2. Sensitivity 1 adjust". Perform adjustment steps 1 and 2 of "3. Sensitivity 2 adjust" after performing the adjustment of "2. Sensitivity 1 adjust".</p>

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
4. RSSI Reference adjust *5	1) Adj item: [RSSI Reference (Analog Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: 12dB SINAD level -3dB (MOD: 1kHz/±1.5kHz)	SSG Distortion meter Oscilloscope	ANT Universal connector				After input signal from SSG, press [Apply] button to store the adjustment value.	Adjust with the analog signal.
[Analog Wide]	1) Adj item: [RSSI Reference (Analog Wide)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: 12dB SINAD level -3dB (MOD: 1kHz/±3kHz)							
[NXDN Very Narrow]	1) Adj item: [RSSI Reference (NXDN Very Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: 12dB SINAD level for Analog Narrow -3dB (MOD: 1kHz/±1.5kHz)							
5. Open Squelch adjust *6 (Squelch level 5 adjust)	1) Adj item: [Open Squelch (Analog Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: 12dB SINAD level (MOD: 1kHz/±1.5kHz)	SSG Distortion meter Oscilloscope	ANT Universal connector				After input signal from SSG, press [Apply] button to store the adjustment value.	“Open Squelch” will not be adjusted correctly if MOD and Deviation are wrong.
[Analog Wide]	1) Adj item: [Open Squelch (Analog Wide)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: 12dB SINAD level (MOD: 1kHz/±3kHz)							

*5: Because RSSI reference (NXDN Narrow) is adjusted by adjusting RSSI reference (Analog Narrow), it is not necessary to adjust RSSI reference (NXDN Narrow).

NX-200(S)

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
Open Squelch adjust *6 (Squelch level 5 adjust)	1) Adj item: [Open Squelch (NXDN Very Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: 12dB SINAD level for Analog Narrow -4dB (MOD: 400Hz/±1.1kHz)	SSG Distortion meter Oscilloscope		ANT Universal connector			After input signal from SSG, press [Apply] button to store the adjustment value.	Adjust with the analog signal. This item is adjusted under the condition that MOD is "400Hz" and Deviation is "±1.1kHz" due to the circuit configuration.
*6: Because Open Squelch (NXDN Narrow) is adjusted by adjusting Open Squelch (Analog Narrow), it is not necessary to adjust Open Squelch (NXDN Narrow).								
6. Low RSSI adjust *7 [Analog Narrow]	1) Adj item: [Low RSSI (Analog Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: -118dBm (0.28μV) (MOD: 1kHz/±1.5kHz)	SSG		ANT Universal connector			After input signal from SSG, press [Apply] button to store the adjustment value.	
[Analog Wide]	1) Adj item: [Low RSSI (Analog Wide)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: -118dBm (0.28μV) (MOD: 1kHz/±3kHz)							
[NXDN Very Narrow]	1) Adj item: [Low RSSI (NXDN Very Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: -118dBm (0.28μV) (MOD: 1kHz/±1.5kHz)							Adjust with the analog signal.
*7: Because Low RSSI (NXDN Narrow) is adjusted by adjusting Low RSSI (Analog Narrow), it is not necessary to adjust Low RSSI (NXDN Narrow).								

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications / Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
7. High RSSI adjust *8 [Analog Narrow]	1) Adj item: [High RSSI (Analog Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: -80dBm (22.4μV) (MOD: 1kHz/±1.5kHz)	SSG	ANT Universal connector				After input signal from SSG, press [Apply] button to store the adjustment value.	Adjust with the analog signal.
[Analog Wide]	1) Adj item: [High RSSI (Analog Wide)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: -80dBm (22.4μV) (MOD: 1kHz/±3kHz)							
[NXDN Very Narrow]	1) Adj item: [High RSSI (NXDN Very Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: -80dBm (22.4μV) (MOD: 1kHz/±1.5kHz)							
8. Tight Squelch adjust (Squelch level 9 adjust) [Analog Narrow]	1) Adj item: [Tight Squelch (Analog Narrow)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: 12dB SINAD level +5dB (MOD: 1kHz/±1.5kHz)	SSG	ANT Universal connector				After input signal from SSG, press [Apply] button to store the adjustment value.	
[Analog Wide]	1) Adj item: [Tight Squelch (Analog Wide)] 2) Adj item: [Low], [Low'], [Center], [High'], [High] SSG output: 12dB SINAD level +5dB (MOD: 1kHz/±3kHz)							

*8: Because High RSSI (NXDN Narrow) is adjusted by adjusting High RSSI (Analog Narrow), it is not necessary to adjust High RSSI (NXDN Narrow).

NX-200(S)

TERMINAL FUNCTION

Control unit (X53-4432-75)

Pin No.	Name	I/O	Function
CN23			
1	ME	-	Internal MIC GND
2	EMC	I	Internal MIC input
3	SP+	O	BTL output + for internal speaker
4	SP+	O	BTL output + for internal speaker
5	SP-	O	BTL output – for internal speaker
6	SP-	O	BTL output – for internal speaker
7	6_/_KEYI1	-	No connection
8	6_/_KEYO2	-	No connection
9	BL_SB	-	No connection
10	6_/_KEYO0	-	No connection
11	6_/_KEYO1	-	No connection
12	BL_SB	-	No connection
13	6_/_KEYI0	-	No connection
14	AGND	-	GND
CN403			
1	33A	O	3.3V for volume level
2	VOL_GND	-	GND for volume level
3	VOL	I	Volume level input for audio control
4	EN3	I	Rotary switch input
5	AGND	-	GND
6	EN4	I	Rotary switch input
7	EN1	I	Rotary switch input
8	EN2	I	Rotary switch input
9	+B	O	Power output after passing through the fuse
10	SB1	I	Power input after power switch
CN404			
1	LED_G	O	Green LED control output
2	/EMG	I	Emergency (Orange) key input
3	LED_R	O	Red LED control output
4	IFC	I	TX-RX PCB version recognition input
5	/SAVE	O	50C Reg. control output
6	I2CCK	O	TCXO thermometer clock output
7	/5TC	O	50T Reg. switch control output
8	I2CSDA	I/O	TCXO thermometer data input/output
9	SBC	O	SB3 switch control output
10	/T_R	O	TX/RX control output
11	TV2	O	RX tuning voltage 2 output
12	ASSIST	O	VCO tuning voltage output
13	TV1	O	RX tuning voltage 1 output
14	VAGC	I	AGC voltage input
15	5RC	O	50R switch control output
16	TCXO_MOD	O	TCXO modulation output
17	PGND	-	GND

Pin No.	Name	I/O	Function
18	RSSI	I	RSSI voltage input
19	PGND	-	GND
20	CV	I	CV voltage input
21	AGND	-	GND
22	NC	-	No connection
23	NC	-	No connection
24	+B	I	Power input after passing through the fuse
25	+B	I	Power input after passing through the fuse
26	+B	I	Power input after passing through the fuse
27	+B	I	Power input after passing through the fuse
28	NC	-	No connection
29	NC	-	No connection
30	AGND	-	GND
31	/PTT	I	PTT input
32	Side_G	O	Key matrix output (SIDE1,2 key)
33	Side_1	I	Key matrix input (SIDE1 key)
34	W_N	O	W/N control output
35	SDO1	O	PLL serial data output
36	Side_2	I	Key matrix input (SIDE2 key)
37	/PCS_RF	O	PLL enable output
38	/DSW	O	APC voltage discharge switch control output
39	APC	O	APC control voltage output
40	/APCSW	O	APC switch control output
41	VCO_MOD	O	VCO modulation output
42	THP	I	Thermistor voltage input
43	PLD	I	PLL lock detect input
44	38M	O	38M output
45	SCK1	O	PLL clock output
46	GND	-	GND
47	S_DET	I	Battery select input
48	GND	-	GND
49	NC	-	No connection
50	IF_DET	I	IF input
CN405			
1	SSW	I	EXT/INT speaker switch input
2	SP+	O	BTL output + for external speaker
3	SP-	O	BTL output – for external speaker
4	MSW	I	EXT/INT MIC switch input
5	EMC	I	External MIC input
6	ME	-	External MIC GND
7	PTT	I	External PTT input
8	PF	I	Programmable function key input
9	OPT	I/O	Option interface I/O
10	E	-	GND
11	5V	O	5V output

TERMINAL FUNCTION

Pin No.	Name	I/O	Function
12	TXD	O	Serial data output
13	RXD	I	Serial data input
14	NC	-	No connection
CN710			
1	OPT1	I/O	
2	OPT3	I/O	
3	26P_RD	I	
4	26P_TD	O	
5	NC	-	
6	OPT4	O	
7	OPT10	O	
8	OPT5	O	
9	DGND	-	
10	AGND	-	
11	AI	I	
12	AO	O	
13	AGND	-	
14	5V	O	
15	OPT9	I	
16	DTI	I	
17	OPT8	I/O	
18	OPT11	O	
19	OPT7	I/O	
20	OPT2	I/O	
21	TXO	O	
22	RXEO	O	
23	RXEI	I	
24	TXI	I	
25	OPT6	O	
26	POW	O	

Refer to "CN710 26-pin connector specification" described on pages 58 to 61.

TX-RX unit (X57-7820-10 A/2)

Pin No.	Name	I/O	Function
CN400			
1	LED_G	I	Green LED control input
2	/EMG	O	Emergency (Orange) key output
3	LED_R	I	Red LED control input
4	IFC	O	TX-RX PCB version recognition output
5	/SAVE	I	50C Reg. control input
6	I2CCK	I	TCXO thermometer clock input
7	/5TC	I	50T Reg. switch control input
8	I2CSDA	I/O	TCXO thermometer data input/output
9	SBC	I	SB3 switch control input
10	/T_R	I	TX/RX control input
11	TV2	I	RX tuning voltage 2 input
12	ASSIST	I	VCO tuning voltage input
13	TV1	I	RX tuning voltage 1 input
14	VAGC	O	AGC voltage output
15	5RC	I	50R switch control input
16	TCXO_MOD	I	TCXO modulation input
17	GND	-	GND
18	RSSI	O	RSSI voltage output
19	GND	-	GND
20	CV	O	CV voltage output
21	GND	-	GND
22	NC	-	No connection
23	NC	-	No connection
24	+B	O	Power output after passing through the fuse
25	+B	O	Power output after passing through the fuse
26	+B	O	Power output after passing through the fuse
27	+B	O	Power output after passing through the fuse
28	NC	-	No connection
29	NC	-	No connection
30	GND	-	GND
31	/PTT	O	PTT output
32	Side_G	I	Key matrix input (SIDE1,2 key)
33	Side_1	O	Key matrix output (SIDE1 key)
34	W_N	I	No connection
35	SDO1	I	PLL serial data input
36	Side_2	O	Key matrix output (SIDE2 key)
37	/PCS_RF	I	PLL enable input
38	/DSW	I	APC voltage discharge switch control input
39	APC	I	APC control voltage input

NX-200(S)

TERMINAL FUNCTION

Pin No.	Name	I/O	Function
40	/APCSW	I	APC switch control input
41	VCO_MOD	I	VCO modulation input
42	THP	O	Thermistor voltage output
43	PLD	O	PLL lock detect output
44	38M	I	38M input
45	SCK1	I	PLL clock input
46	GND	-	GND
47	S_DET	O	Battery select output
48	GND	-	GND
49	NC	-	No connection
50	IF_DET	O	IF output
CN401			
1	PTT	I	Internal PTT input
2	GND	-	GND
3	Side_G	O	Key matrix output (SIDE1,2 key)
4	Side_1	I	Key matrix input (SIDE1 key)
5	Side_2	I	Key matrix input (SIDE2 key)

Solder Pad

Name	I/O	Signal Type	Function	Rating and Condition				
				Parameter	Min	Typ	Max	Unit
PTT2	O	Digital	PTT output	[Output] Output Impedance			10k	Ω
PTT1	I	Digital	PTT input	[Input] VIH	2.8		3.3	V
				[Input] VIL	0		0.5	V
MDSW	I	Digital	Man-down switch input	[Input] VIH	2.8		3.3	V
				[Input] VIL	0		0.5	V
GND	-	GND	GND	Allowable current value				mA
TXD	O	Digital	Serial data output	VOH ($I_o=-5mA$)	4.0	-	5.3	V
				VOL ($I_o=5mA$)	0	-	0.8	V
				Baud Rate			19200	bps
RXD	I	Digital	Serial data input	VIH	2.8	-	5.3	V
				VIL	0	-	0.8	V
				Baud Rate			19200	bps
RSSI	O	Analog	RSSI output	Output Impedance			10k	Ω

TERMINAL FUNCTION

Universal connector

Pin No.	Name	I/O	Signal Type	Function	Rating and Condition				
					Parameter	Min	Typ	Max	Unit
1	SSW	I	Digital	EXT/INT speaker switch input L: External speaker ON H: Internal speaker ON	VIH	2.8	-	5.3	V
					VIL	0	-	0.7	V
2	SP+	O	Analog	BTL output + for external speaker	[8Ω load] Max output power (1kHz, Batt=7.5V)		1.3	1.8	W
					[8Ω load] DC Bias		2.5		V
					[8Ω load] Allowable Frequency	300		3000	Hz
3	SP-	O	Analog	BTL output – for external speaker	[16Ω load] Max output power (1kHz, Batt=7.5V)		0.9	1.4	W
					[16Ω load] DC Bias		2.5		V
					[16Ω load] Allowable Frequency	300		3000	Hz
4	MSW	I	Digital	EXT/INT MIC switch input L: External MIC ON H: Internal MIC ON	VIH	2.8	-	5.3	V
					VIL	0	-	0.5	V
5	EMC	I	Analog	External MIC input	Audio Level (STD deviation)	7.7	12.5	17.3	mV
					DC Bias		3.3		V
					Allowable Frequency	300		3000	Hz
					Input Impedance	-	1.8	-	kΩ
6	ME	-	-	External MIC GND					
7	PTT	I	Digital	External PTT input L: PTT ON	VIH	2.8	-	5.3	V
					VIL	0	-	0.7	V
8	PF	I	Analog	Programmable function key input	V (PF2 key ON)	2.2	-	2.8	V
					V (PF1 key ON)	1.7	-	2.2	V
					V (PF1, PF2 key ON)	1.3	-	1.7	V
9	OPT	I	Digital	Man-down input Programmable active H/L	VIH	2.8	-	5.3	V
					VIL	0	-	0.7	V
10	E	-	-	GND					
11	5V	-	Power	5V power supply output (Output control is FPU programmable)	Output Voltage (Iout=100mA)	4.9	5.0	5.1	V
					Maximum Current	-	-	0.2	A
12	TXD	O	Digital	Serial data output	VOH (Io=-5mA)	4.0	-	5.3	V
					VOL (Io=5mA)	0	-	0.8	V
					Baud Rate			19200	bps
13	RXD	I	Digital	Serial data input	VIH	2.8	-	5.3	V
					VIL	0	-	0.8	V
					Baud Rate			115200	bps
14	NC	-	-	Not used (reserved for future option)					

NX-200(S)

TERMINAL FUNCTION

CN710 26-pin connector specification

Pin No.	Name	I/O	Signal Type	Rating and Condition				
				Parameter	Min	Typ	Max	Unit
1	OPT1	I/O	Digital	[Input] VIH	2.8		3.3	V
6	OPT4			[Input] VIL	0		0.5	V
8	OPT5			[Output] VOH	2.8		3.5	V
17	OPT8			[Output] VOL	0		0.5	V
18	OPT11							
2	OPT3	I/O	Digital	[Input] VIH	2.8		3.3	V
19	OPT7			[Input] VIL	0		0.5	V
20	OPT2			[Output] VOH	2.8		3.5	V
25	OPT6			[Output] VOL	0		0.5	V
3	26P_RD	I	Digital	[Input] VIH	2.8		3.3	V
				[Input] VIL	0		0.5	V
				Baud Rate			19200	bps
4	26P_TD	O	Digital	[Output] VOH	2.8		3.5	V
				[Output] VOL	0		0.5	V
				Baud Rate			19200	bps
15	OPT9	I	Analog	Input Amplitude (Square wave)	-	3.3	-	Vp-p
				Coupling Capacitor	-	0.01	-	μF
				Input Impedance	22k	-	-	Ω
				Allowable Frequency	300	-	3000	Hz
7	OPT10	O	Analog/Digital	Output Amplitude (1kHz, 60% deviation)	0.9	1.3	1.7	Vp-p
				Coupling Capacitor		0.1		μF
				Output Impedance			22k	Ω
				Allowable Frequency	300		3000	Hz
11	AI	I	Analog	Input Amplitude (1kHz, 60% deviation)	0.3	0.5	0.7	Vp-p
				Coupling Capacitor	-	0.1	-	μF
				Input Impedance	-	12k	-	Ω
				Allowable Frequency	300		3000	Hz
12	AO	O	Analog	Output Amplitude (1kHz, 60% deviation)	30	50	70	mVp-p
				Coupling Capacitor	-	0.1	-	μF
				Output Impedance	-	35k	-	Ω
				Allowable Frequency	300		3000	Hz
16	DTI	I	Analog	Input Amplitude (1kHz, 60% deviation)	0.8	1.1	1.4	Vp-p
				Coupling Capacitor	-	0.1	-	μF
				Input Impedance	22k	-	-	Ω
				Allowable Frequency	300	-	3000	Hz
21	TXO	O	Analog	Output Amplitude (1kHz, 60% deviation) while external MIC	160	260	360	mVp-p
				Output Amplitude (1kHz, 60% deviation) while internal MIC	-	130	-	mVp-p
				Coupling Capacitor	-	0.1	-	μF
				Output Impedance	-	-	2.2k	Ω
				Allowable Frequency	300		3000	Hz

TERMINAL FUNCTION

Pin No.	Name	I/O	Signal Type	Rating and Condition											
				Parameter	Min	Typ	Max	Unit							
22	RXEO	O	Analog	Output Amplitude (1kHz, 60% deviation)	450	640	830	mVp-p							
				Coupling Capacitor	-	0.1	-	μF							
				Output Impedance	-	-	2.2k	Ω							
				Allowable Frequency	300	-	3000	Hz							
23	RXEI	I	Analog	Input Amplitude (1kHz, 60% deviation)	450	640	830	mVp-p							
				Coupling Capacitor		0.1		μF							
				Input Impedance	22k			Ω							
				Allowable Frequency	300		3000	Hz							
24	TXI	I	Analog	Input Amplitude (1kHz, 60% deviation) while external MIC	160	260	360	mVp-p							
				Input Amplitude (1kHz, 60% deviation) while internal MIC	-	130	-	mVp-p							
				Coupling Capacitor	-	0.1	-	μF							
				Input Impedance	22k	-	-	Ω							
				Allowable Frequency	300	-	3000	Hz							
14	5V	O	Power	Output Voltage		5		V							
				Output Current			78	mA							
26	POW	O	Power	Output Voltage		7.5		V							
				Output Current			100	mA							
9	DGND	-	GND	Allowable current value (Total current of 3 pins)			100	mA							
10	AGND														
13															
5	NC	-	-	-											

CN710 26-pin connector specification

Pin No.	Name	Device	I/O	Connection	Function
1	OPT1	ANI board	O	Aux Input	[COR] Conv/LTR L: Activity receiving H: Not activity receiving [TOR] Conv/LTR L: Activity receiving (Sub Tone or LTR ID is OK) H: Not activity receiving [LOK] Conv L: TX Complete H: Not TX Complete LTR L: TX Link Complete (until TX finishes) H: Not TX Link Complete
					BUSY indication
					Scrambler code signal output 1
2	OPT3	ANI board	I	KEY	TX requirement input
		VGS-1	I	PLAY	PLAY indication
		Scrambler board	O	Binary Code Select 2	Scrambler code signal output 2

NX-200(S)

TERMINAL FUNCTION


Pin No.	Name	Device	I/O	Connection	Function
3	26P_RD	ANI board	-	-	-
		VGS-1	I	SO	Serial data input
		Scrambler board	I	SDI	Serial data input
4	26P_TD	ANI board	-	-	-
		VGS-1	O	SI	Serial data output
		Scrambler board	O	SDO	Serial data output
5	NC	-	-	-	-
6	OPT4	ANI board	O	PTT	PTT signal output
		VGS-1	O	EN	Enable
		Scrambler board	O	PTT Out	PTT signal output When Echo PTT is allowed.
7	OPT10	ANI board	-	-	-
		VGS-1	O	USEL	UART speed select output
		Scrambler board	-	-	-
8	OPT5	ANI board	O	Emergency	Emergency signal output
		VGS-1	O	RST	Reset output
		Scrambler board	-	-	-
9	DGND	ANI board	-	A-	GND
		VGS-1	-	DGND	DGND
		Scrambler board	-	-	-
10	AGND	ANI board	-	A-	GND
		VGS-1	-	AGND	AGND
		Scrambler board	-	GND	GND
11	AI	ANI board	-	-	-
		VGS-1	I	AO	VGS Audio input
		Scrambler board	-	-	-
12	AO	ANI board	-	-	-
		VGS-1	O	AI	VGS Audio output
		Scrambler board	-	-	-
13	AGND	ANI board	-	A-	GND
		VGS-1	-	AGND	AGND
		Scrambler board	-	GND	GND
14	5V	ANI board	-	-	Note: POW and 5V can not be used simultaneously.
		VGS-1	O	5C	5V power supply
		Scrambler board	-	5V	Power supply output
15	OPT9	ANI board	I	Sidetone	Sidetone input
		VGS-1	-	-	-
		Scrambler board	I	Sidetone	Sidetone input
16	DTI	ANI board	I	Data Out	Data signal input
		VGS-1	-	-	-
		Scrambler board	-	-	-
17	OPT8	ANI board	I	Tone Control	Speaker mute signal input
		VGS-1	-	-	-
		Scrambler board	O	LOK	Link completed L: Link When Echo PTT is allowed.

TERMINAL FUNCTION

Pin No.	Name	Device	I/O	Connection	Function
18	OPT11	ANI board	O	Man-Down	Man-Down output
		VGS-1	-	-	-
		Scrambler board	O	-	User programmable port None: Hi-Z with Pull up [COR] L: Detect carrier [TOR] L: Detect signaling [LOK](Conventional) L: Transmitting [LOK](LTR) L: Link
19	OPT7	ANI board	I	MIC Mute	MIC mute signal input
		VGS-1	-	-	-
		Scrambler board	O I	PTT Out PTT In	Echo PTT no used: PTT signal output Echo PTT used : PTT signal input
20	OPT2	ANI board	I	Aux Output	Emergency signal input
		VGS-1	-	-	-
		Scrambler board	O	CLEAR / CODE	Scrambler control signal output H: Clear / L: Code
21	TXO	ANI board	-	-	-
		VGS-1	-	-	-
		Scrambler board	O	TX IN	MIC signal output Before Pre-emphasis
22	RXEO	ANI board	-	-	-
		VGS-1	-	-	-
		Scrambler board	O	RX IN	Audio signal output After De-emphasis
23	RXEI	ANI board	-	-	-
		VGS-1	-	-	-
		Scrambler board	I	RX OUT	Audio signal input After De-emphasis
24	TXI	ANI board	-	-	-
		VGS-1	-	-	-
		Scrambler board	I	TX OUT	MIC signal input Before Pre-emphasis
25	OPT6	ANI board	-	-	-
		VGS-1	-	-	-
		Scrambler board	-	-	-
26	POW	ANI board	O	A+	Switched B output
		VGS-1	-	-	Note: POW and 5V can not be used simultaneously.
		Scrambler board	O	POWER (+B)	Power supply output

NX-200(S) PC BOARD


CONTROL UNIT (X53-4432-75)
Component side view (J79-0131-39)

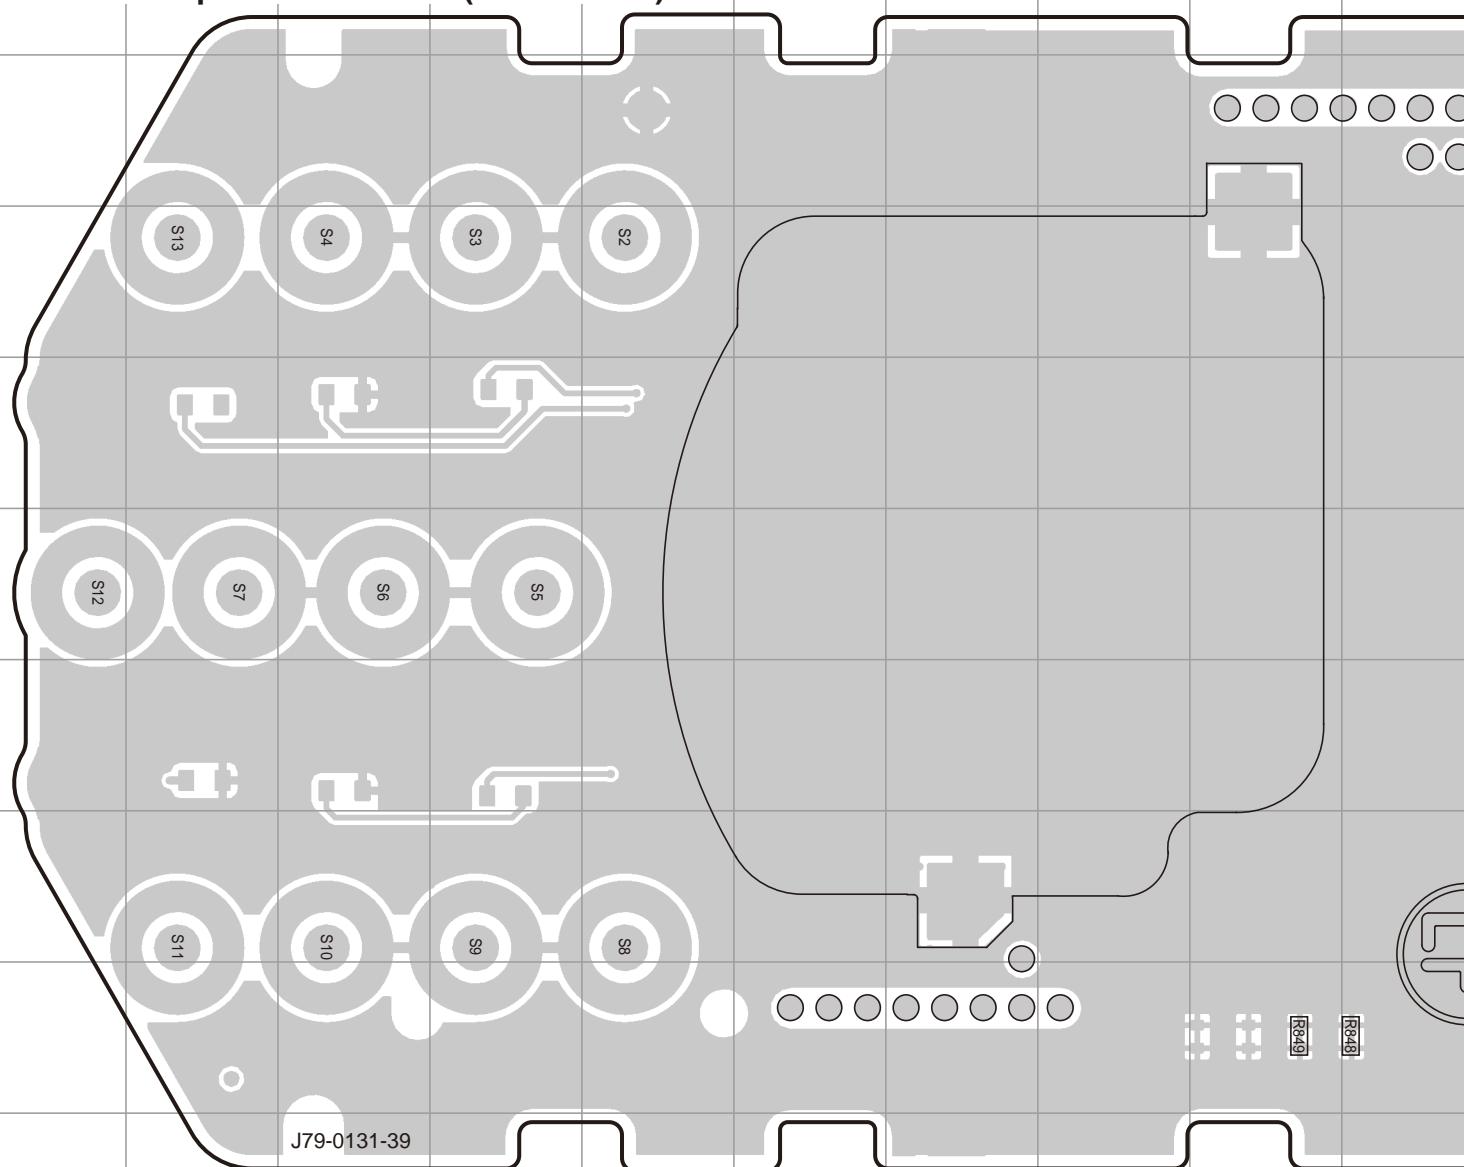

Ref. No.	Address	Ref. No.	Address
IC415	8K	D16	7L
Q4	4L	D17	9L
Q5	4L	D18	4L
D11	7L	D19	4L
D12	7M	D20	8M
D13	7M	D21	8M
D14	7M	D22	8L
D15	7L	D23	9L

PC BOARD NX-200(S)

CONTROL UNIT (X53-4432-75) Component side view (J79-0131-39)

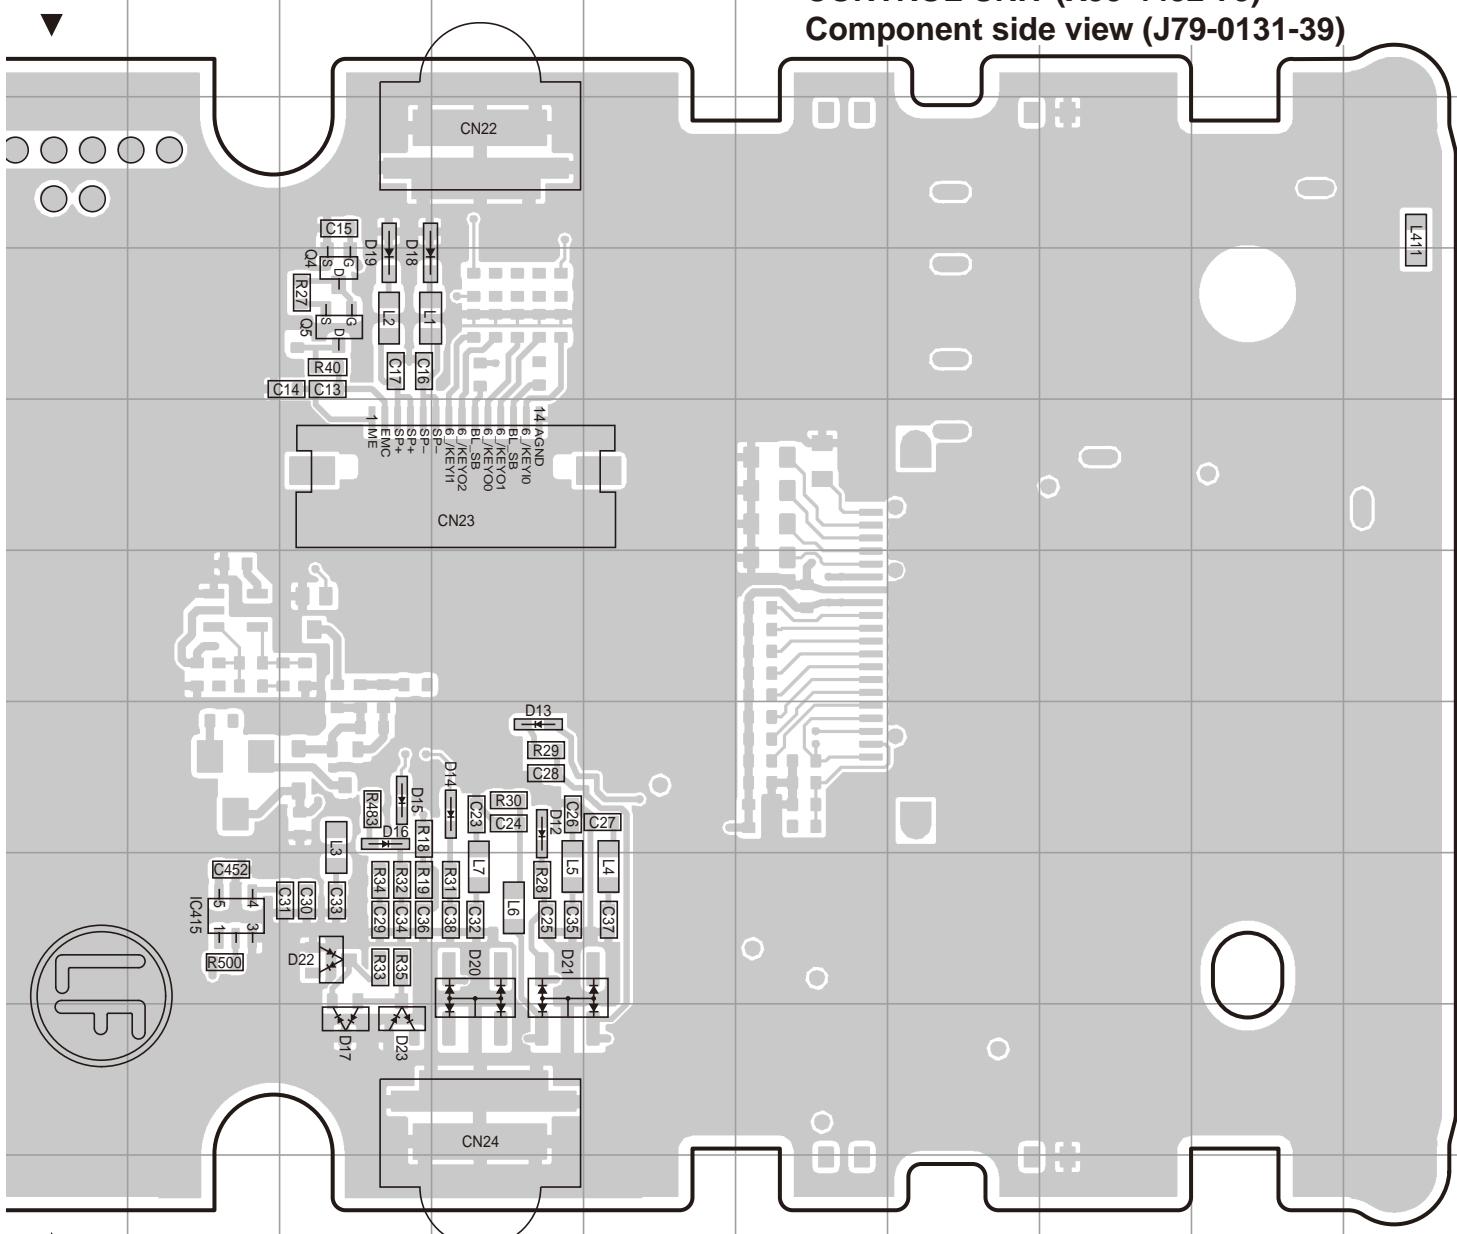


Component side

Layer 1
Layer 2
Layer 3
Layer 4
Layer 5

NX-200(S) PC BOARD


CONTROL UNIT (X53-4432-75) Foil side view (J79-0131-39)

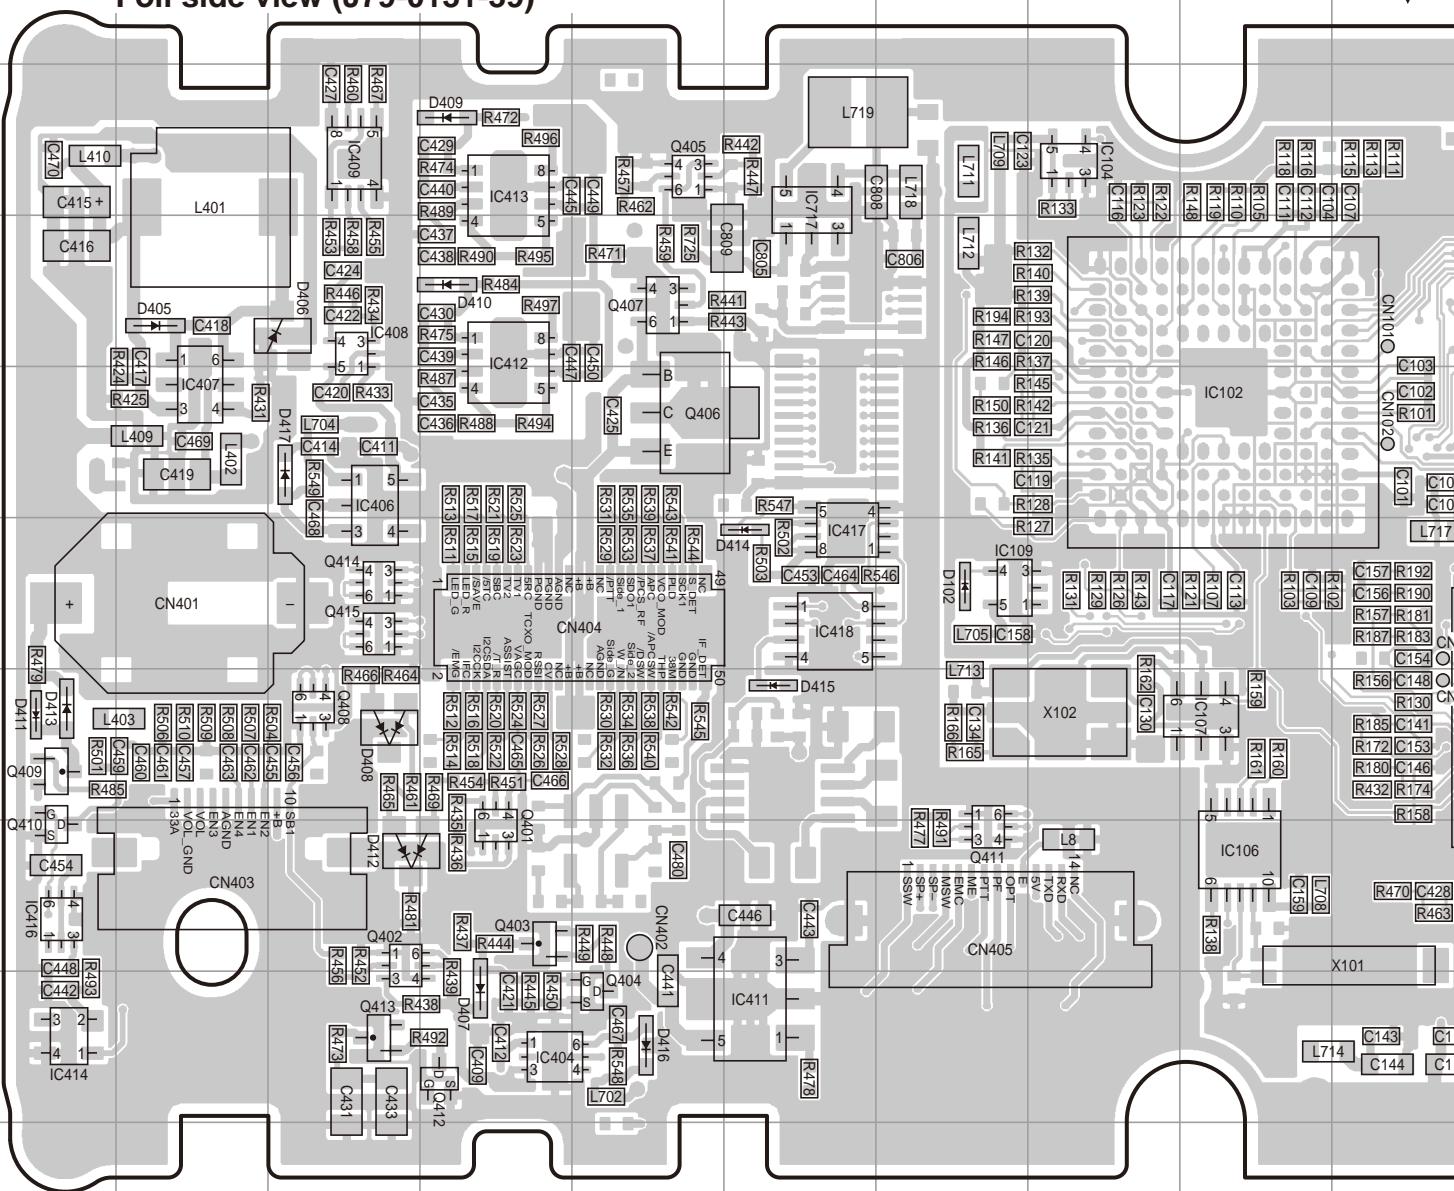

Ref. No.	Address												
IC101	5K	IC408	4C	IC704	3P	IC716	5N	Q411	8G	D404	5M	D416	9E
IC102	5I	IC409	3C	IC705	9N	IC717	3F	Q412	9D	D405	4B	D417	5C
IC103	4K	IC411	9F	IC706	7N	Q401	8D	Q413	9C	D406	4C	D701	8R
IC104	3H	IC412	4D	IC707	3P	Q402	8C	Q414	6C	D407	9D	D702	8R
IC105	4L	IC413	3D	IC708	9Q	Q403	8D	Q415	6C	D408	7C	D703	4O
IC106	8I	IC414	9A	IC709	4R	Q404	9E	Q702	4R	D409	3D	D704	3O
IC107	7I	IC416	8A	IC710	6N	Q405	3E	Q703	6R	D410	4D	D705	8R
IC108	7K	IC417	6F	IC711	6S	Q406	5E	Q704	7R	D411	7A	D706	6O
IC109	6G	IC418	6F	IC712	6N	Q407	4E	Q705	5O	D412	8C	D707	6O
IC404	9D	IC701	7Q	IC713	4Q	Q408	7C	Q706	5O	D413	7A		
IC406	5C	IC702	5R	IC714	5R	Q409	7A	Q707	4N	D414	6F		
IC407	5B	IC703	7P	IC715	5P	Q410	8A	D102	6G	D415	7F		

PC BOARD NX-200(S)

**CONTROL UNIT (X53-4432-75)
Foil side view (J79-0131-39)**

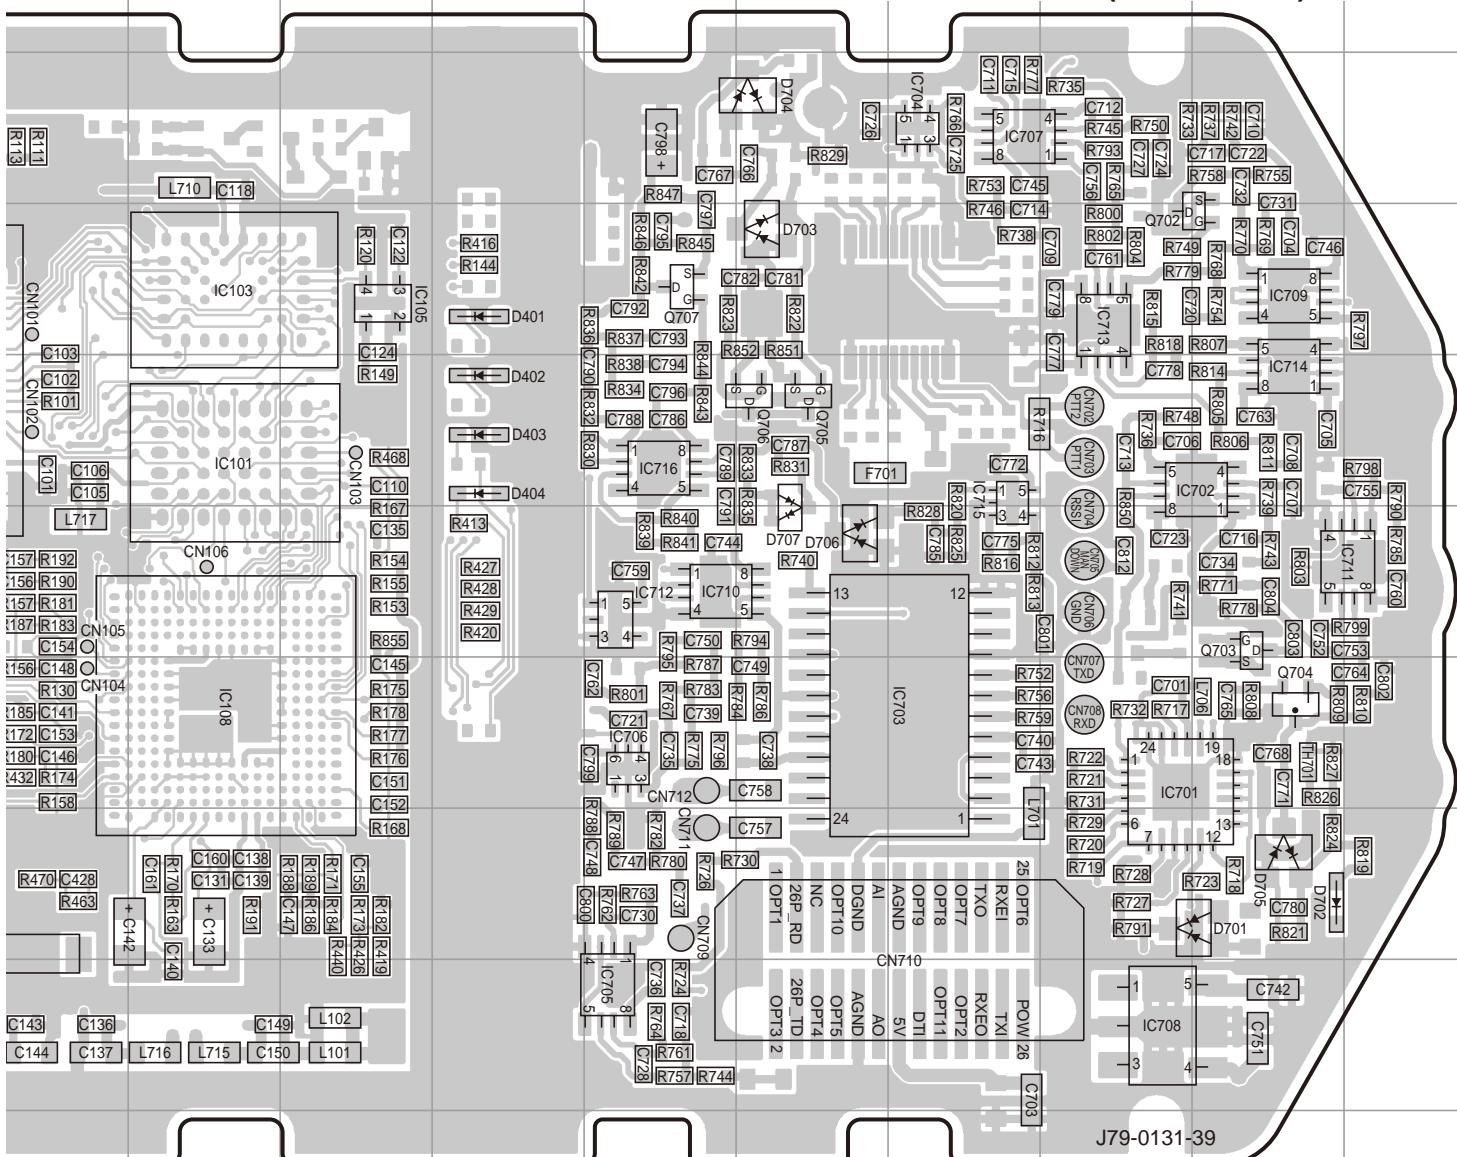

J79-0131-39


Component side

- | |
|---------|
| Layer 1 |
| Layer 2 |
| Layer 3 |
| Layer 4 |
| Layer 5 |
| |

Foil side

NX-200(S) PC BOARD

TX-RX UNIT (X57-7820-10) (A/2)
Component side view (J79-0127-39 A/2)

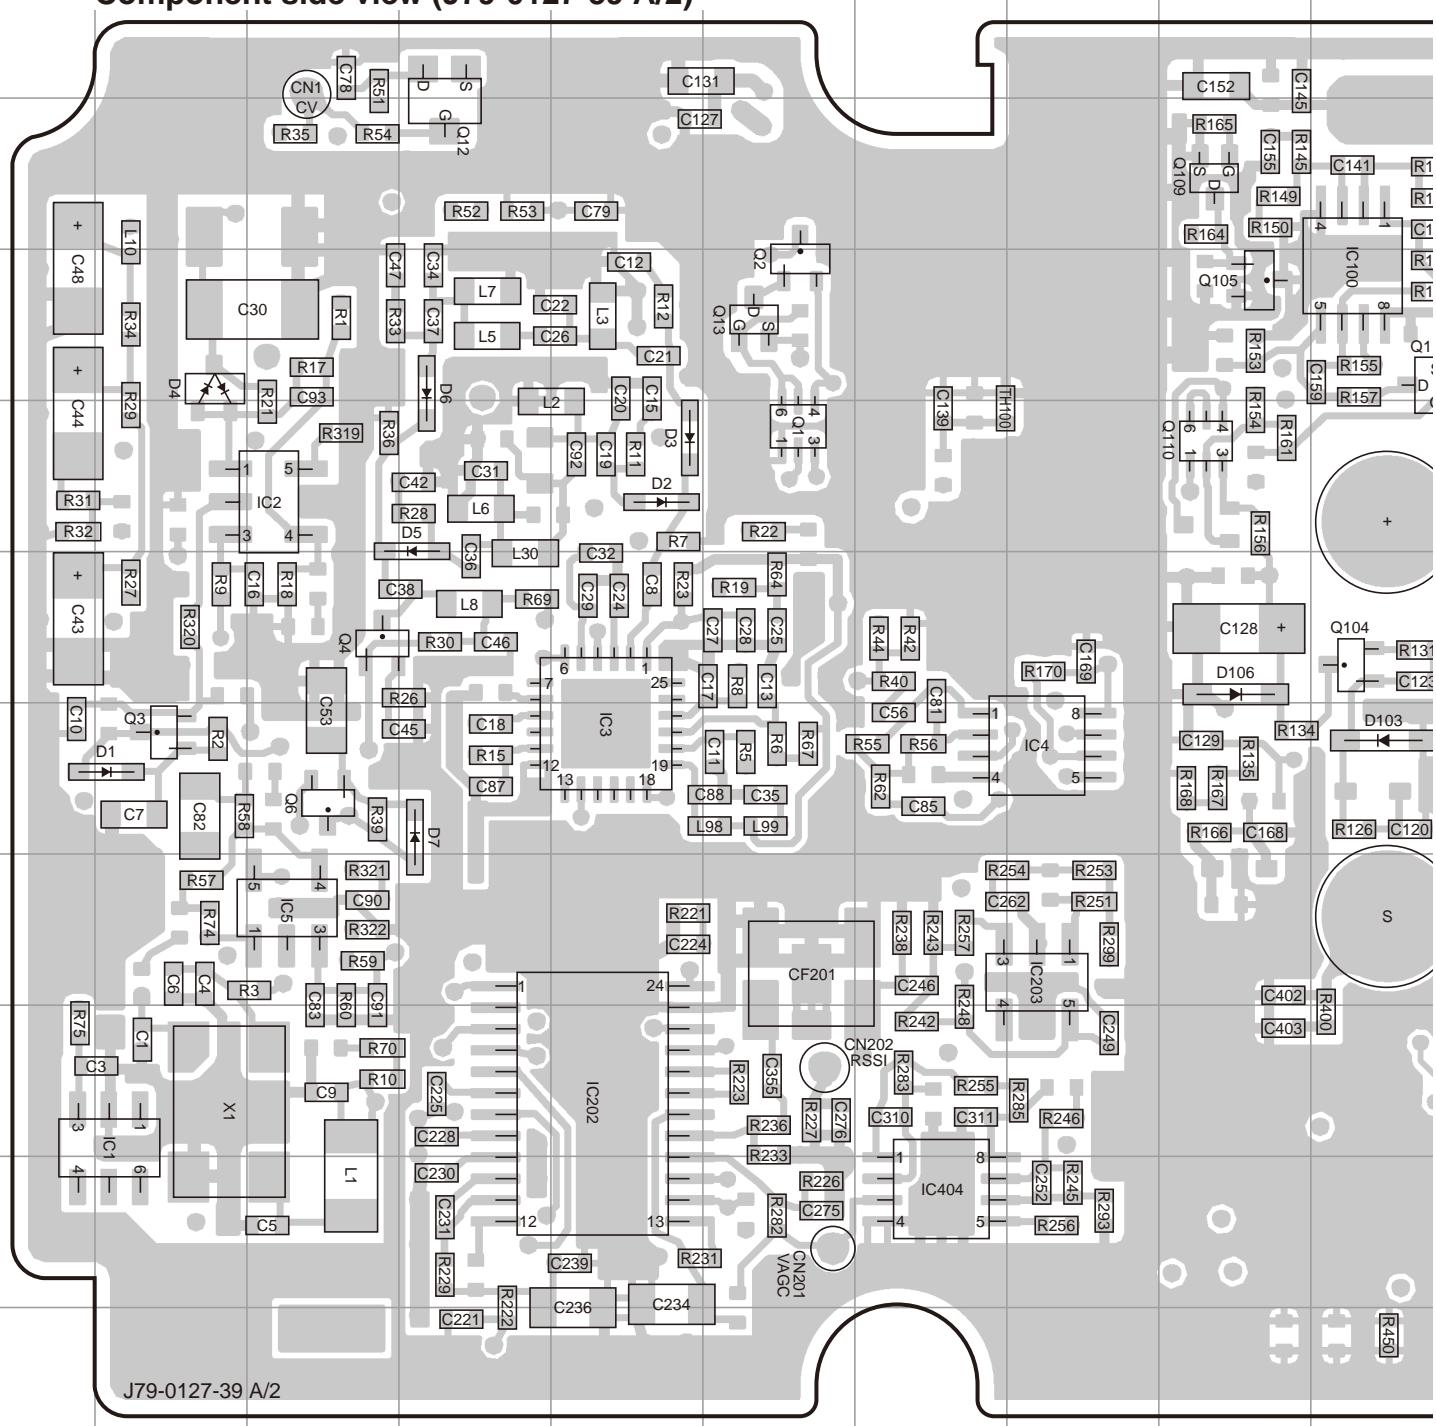


Ref. No.	Address										
IC1	9B	IC203	8H	Q4	6C	Q110	5I	D3	5E	D401	5P
IC2	5C	IC400	5N	Q6	7C	Q401	7M	D4	4B	D402	8P
IC3	7E	IC401	4P	Q12	3D	Q403	7N	D5	5D	D403	4N
IC4	7H	IC402	9O	Q13	4F	Q404	9O	D6	4D		
IC5	8C	IC404	10G	Q104	6J	Q405	4N	D7	7D		
IC100	4J	Q1	5F	Q105	4I	Q406	9P	D103	7J		
IC200	7K	Q2	4F	Q107	4J	D1	7B	D106	6I		
IC202	9E	Q3	7B	Q109	3I	D2	5E	D400	5M		

PC BOARD

NX-200(S)

TX-RX UNIT (X57-7820-10) (A/2)



Component side view (J79-0127-39 A/2)

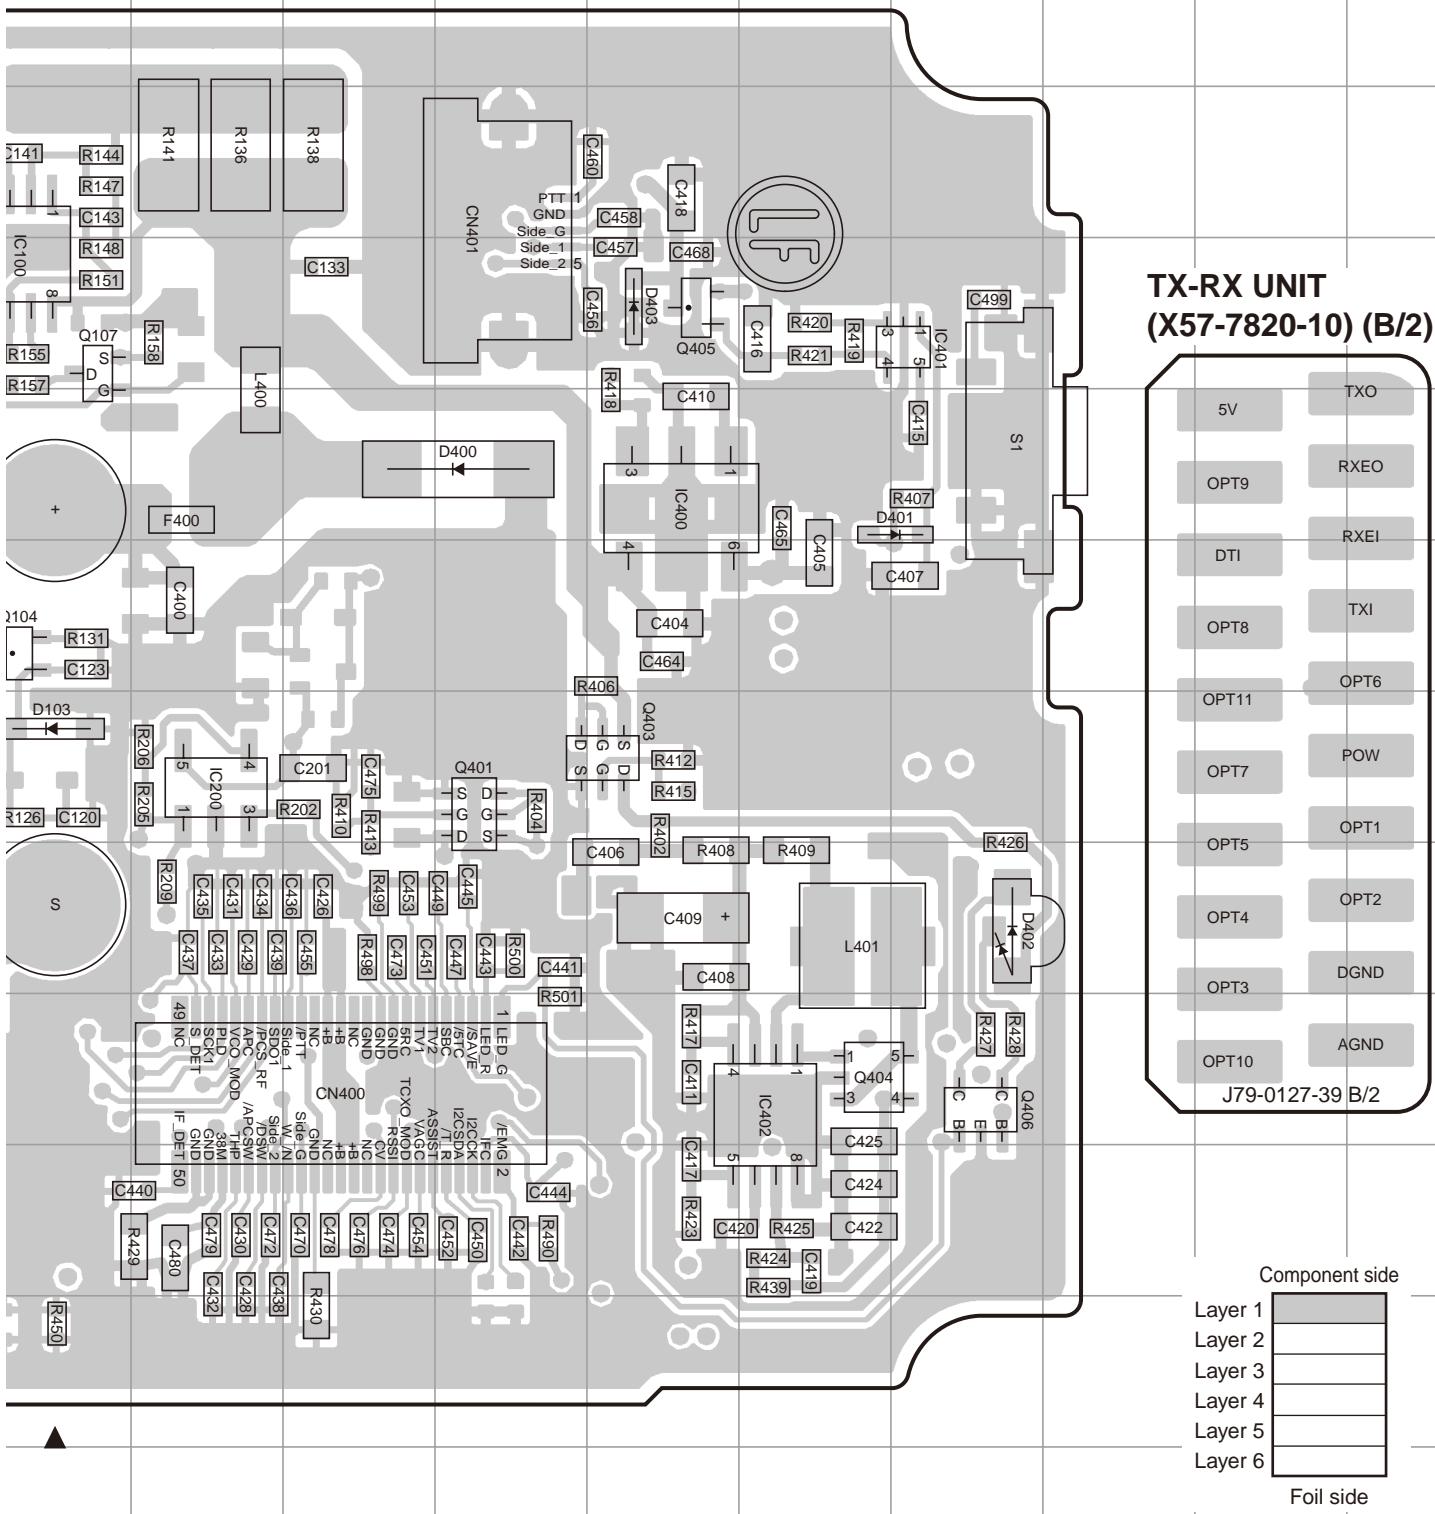

NX-200(S) PC BOARD


TX-RX UNIT (X57-7820-10) (A/2)
Foil side view (J79-0127-39 A/2)

TX-RX UNIT
(X57-7820-10) (B/2)

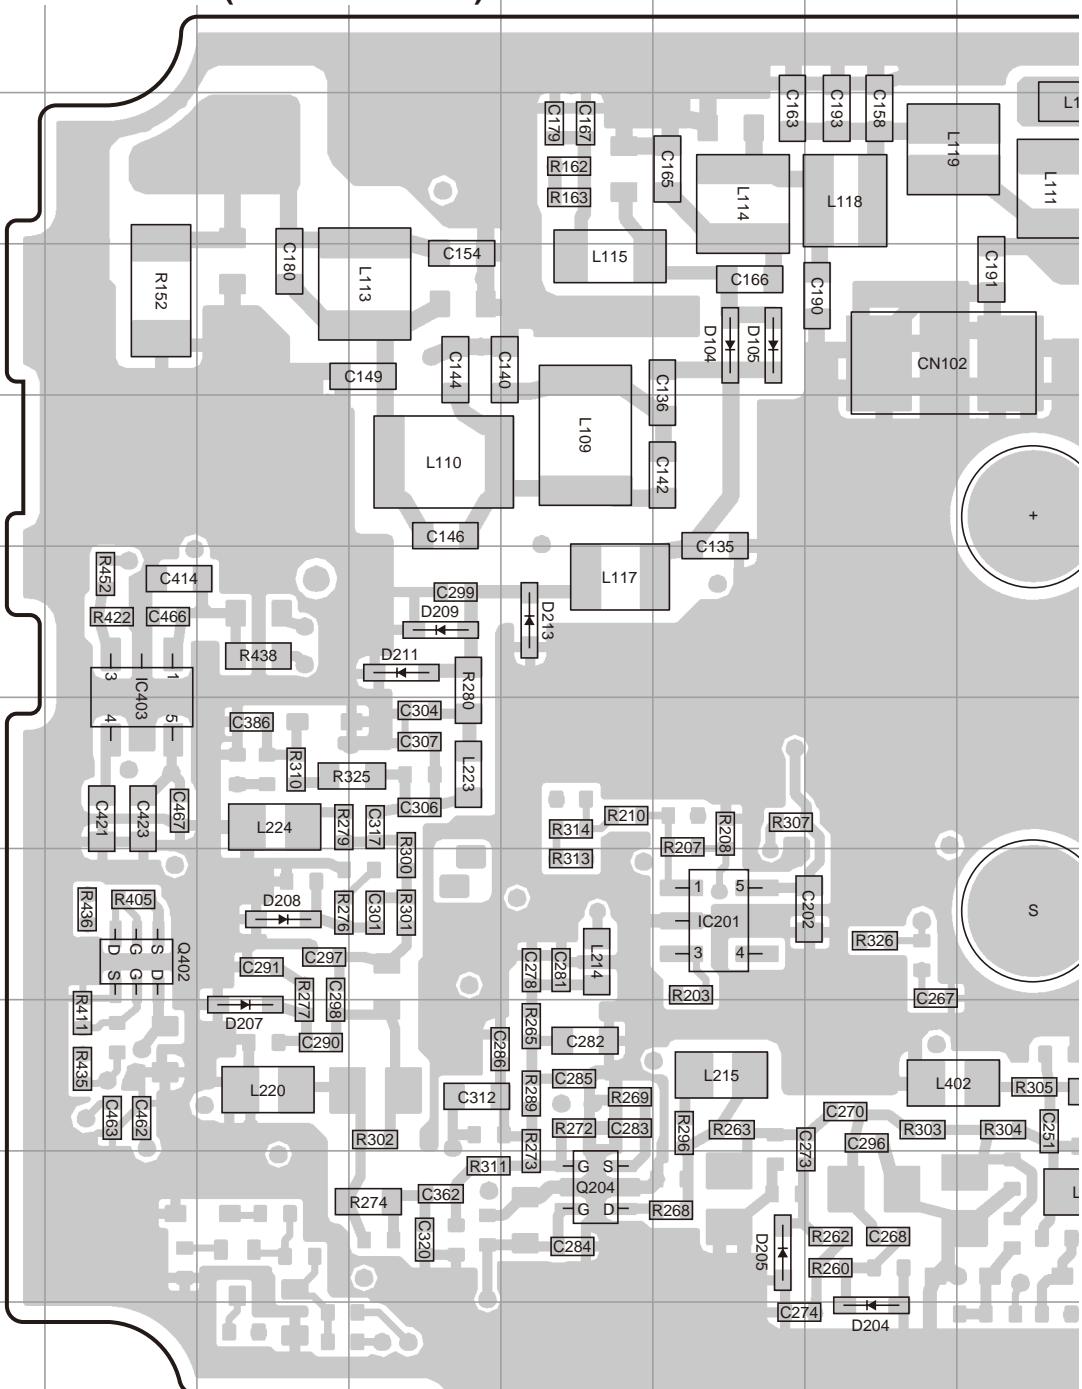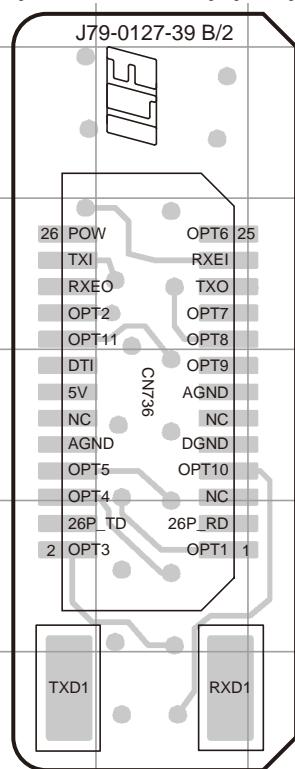

PC BOARD NX-200(S)


**TX-RX UNIT (X57-7820-10) (A/2)
Foil side view (J79-0127-39 A/2)**

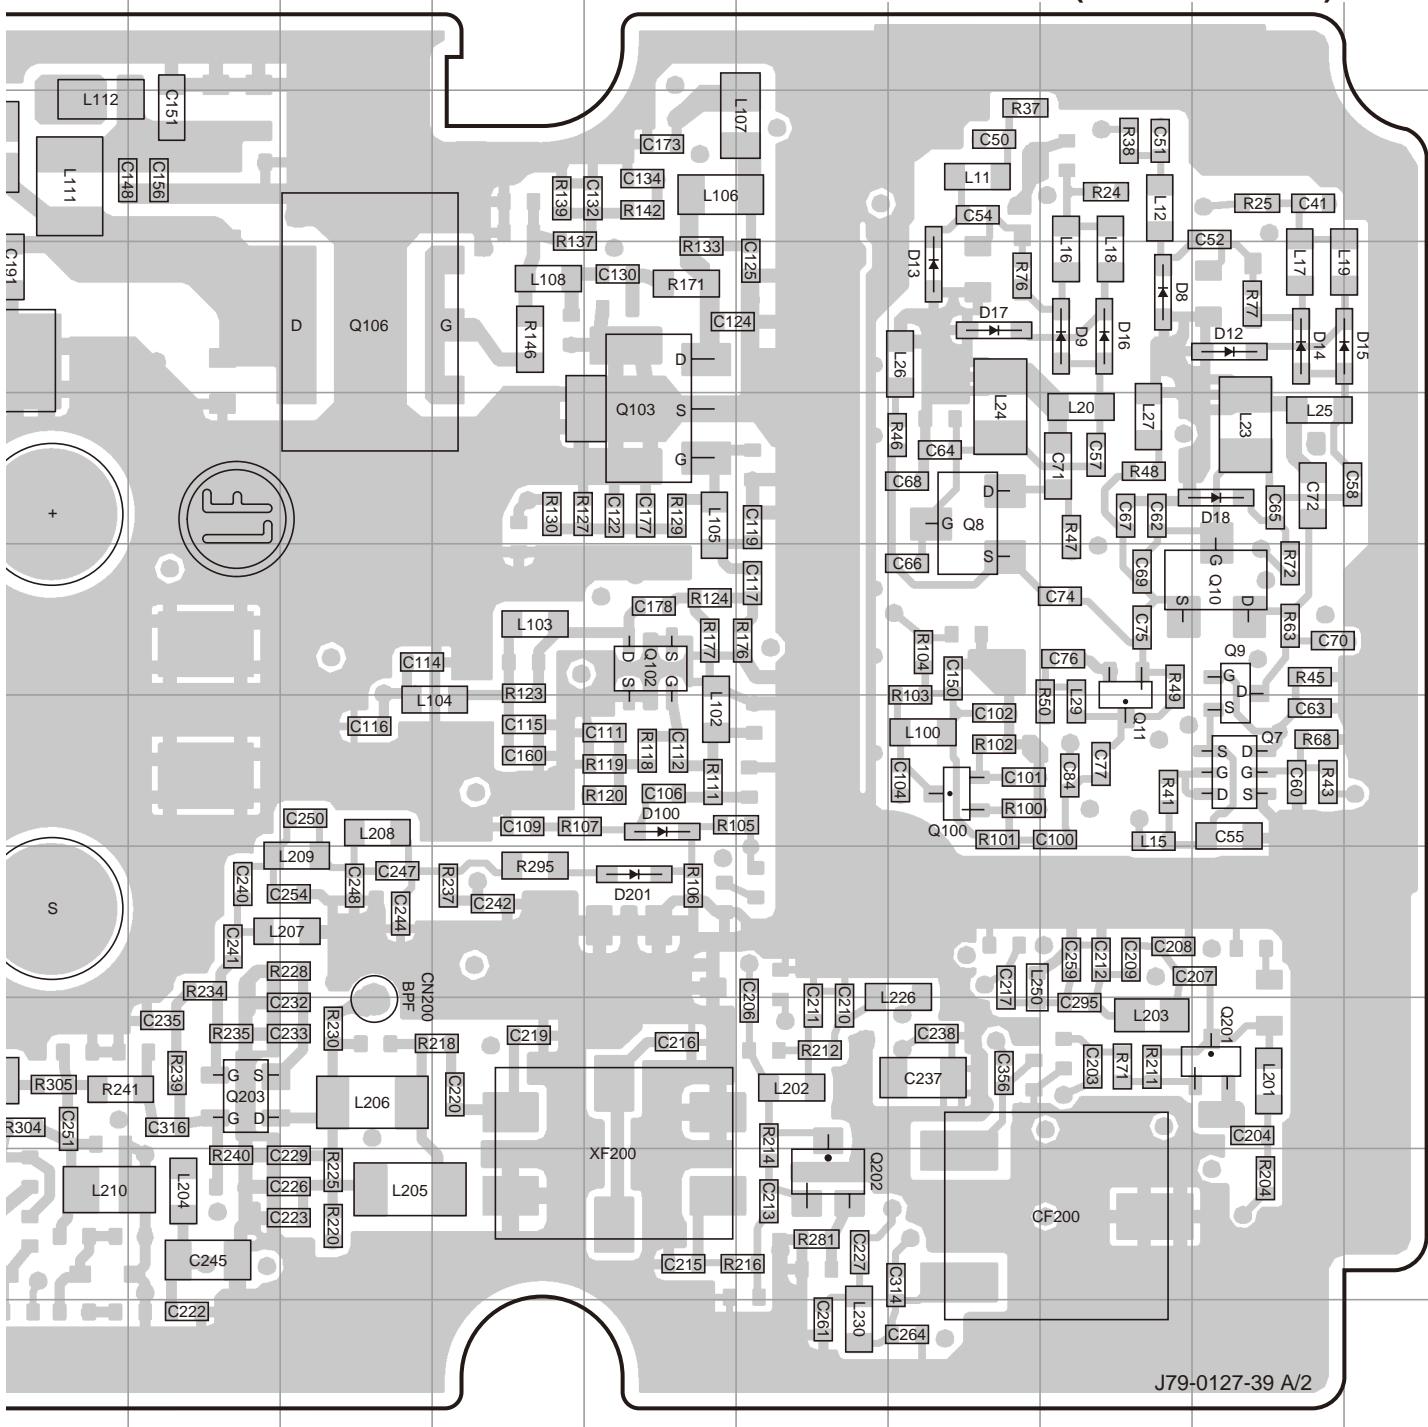


Ref. No.	Address										
IC201	8H	Q100	7P	Q204	10G	D15	4S	D201	8N	D213	6G
IC403	7D	Q102	6N	Q402	8D	D16	4Q	D204	11I		
Q7	7R	Q103	5N	D8	4Q	D17	4P	D205	10H		
Q8	5P	Q106	4L	D9	4Q	D18	5R	D207	9E		
Q9	6R	Q201	9R	D12	4R	D100	7N	D208	8E		
Q10	6R	Q202	10O	D13	4P	D104	4H	D209	6F		
Q11	7Q	Q203	9K	D14	4R	D105	4H	D211	6F		

NX-200(S)

INTERCONNECTION DIAGRAM

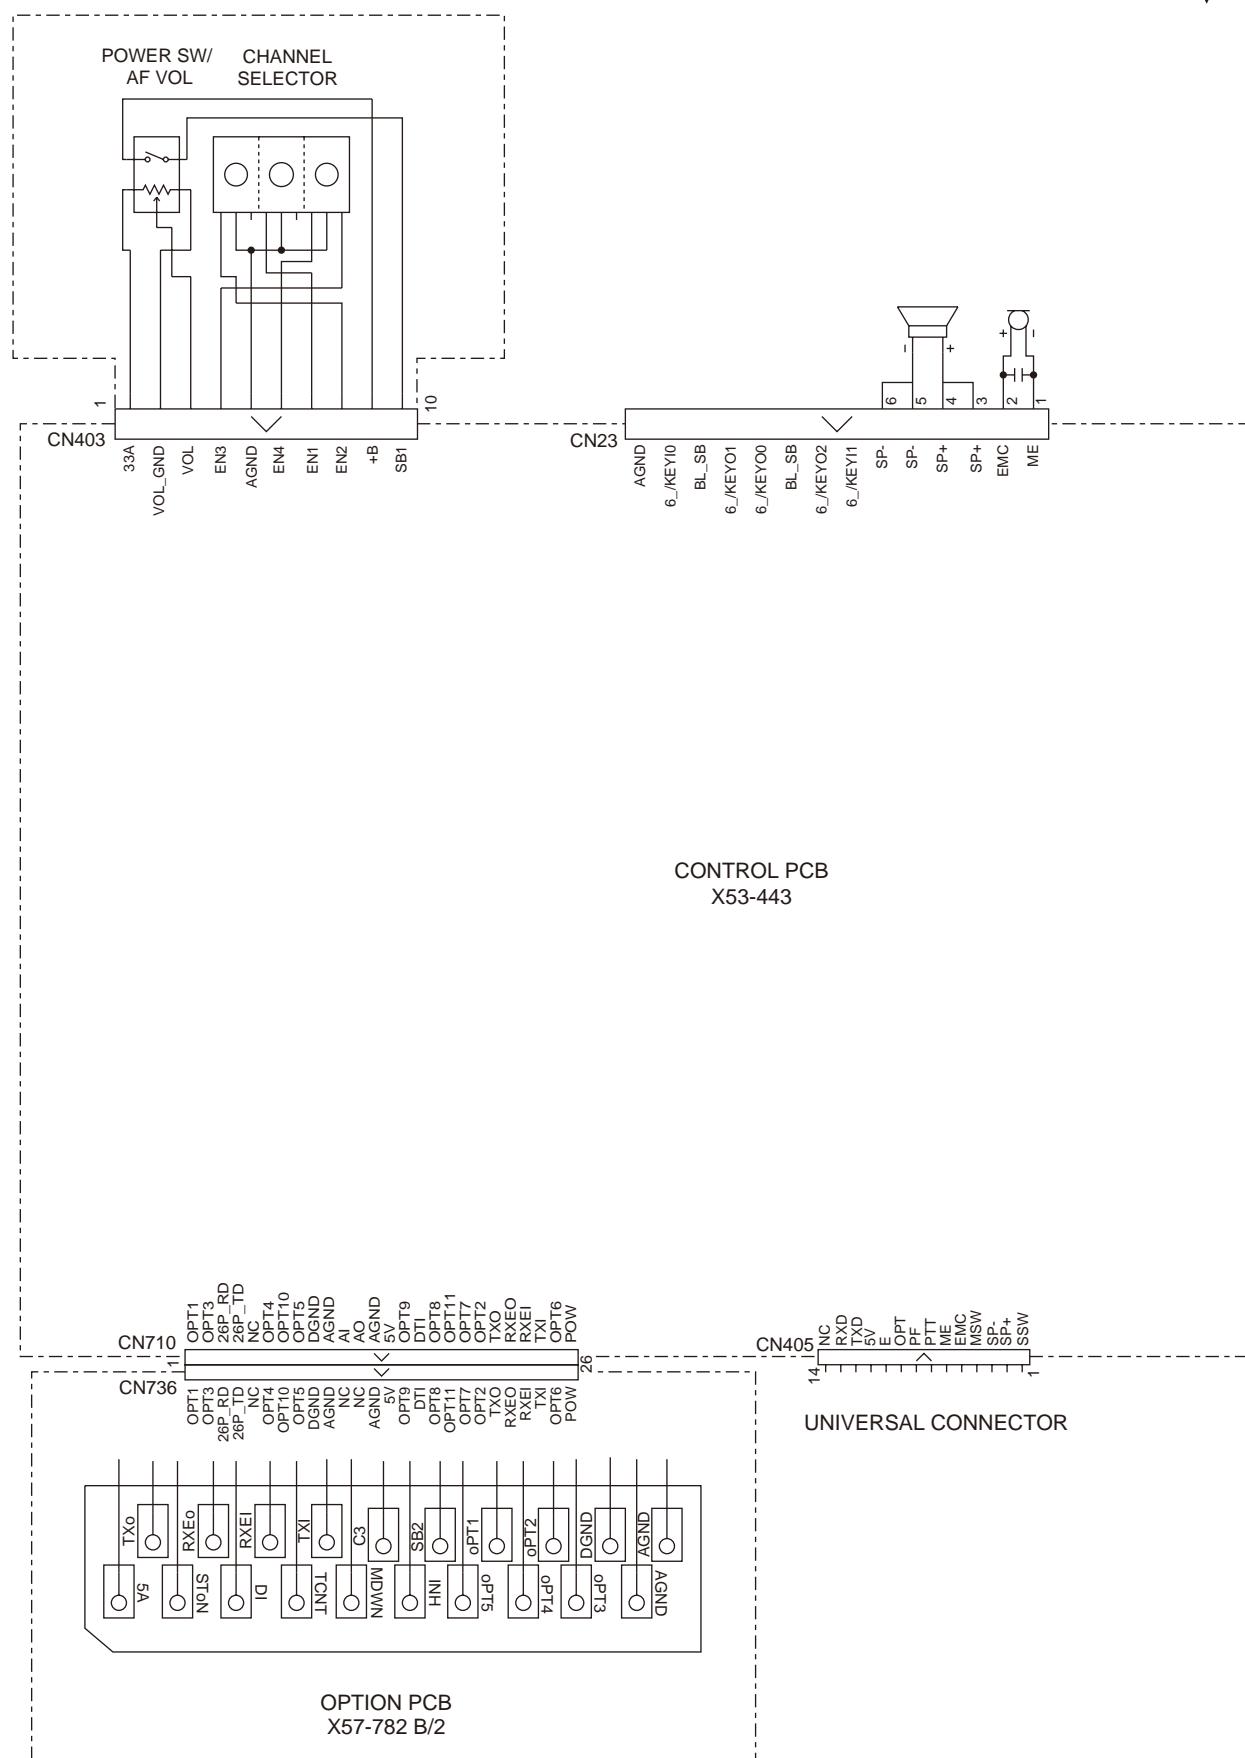


INTERCONNECTION DIAGRAM

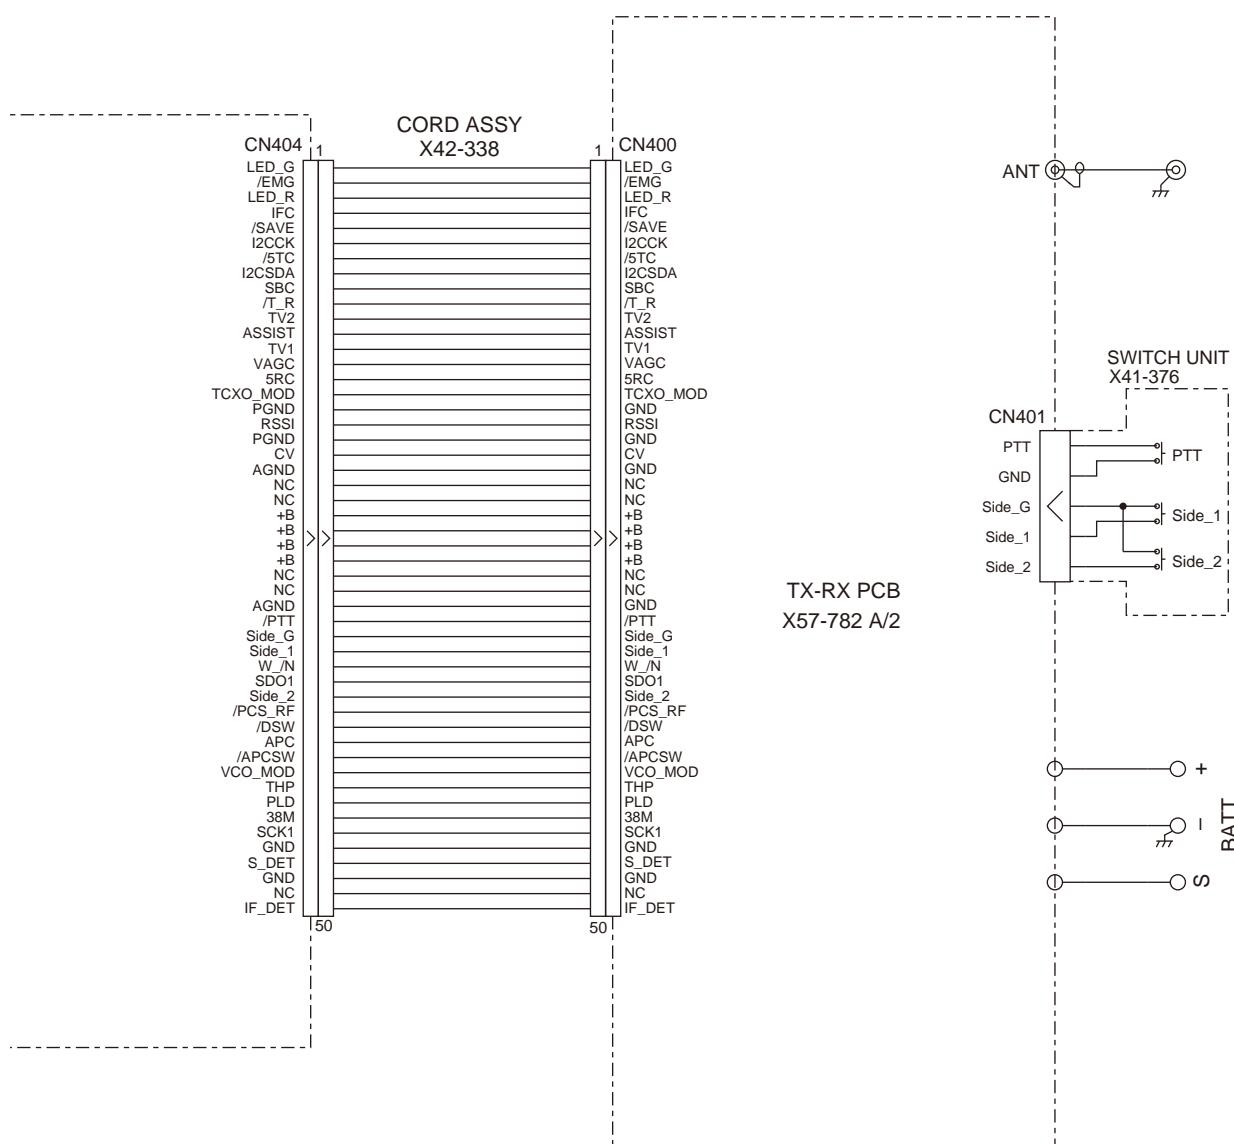

NX-200(S) SCHEMATIC DIAGRAM

CONTROL UNIT (X53-4432-75)

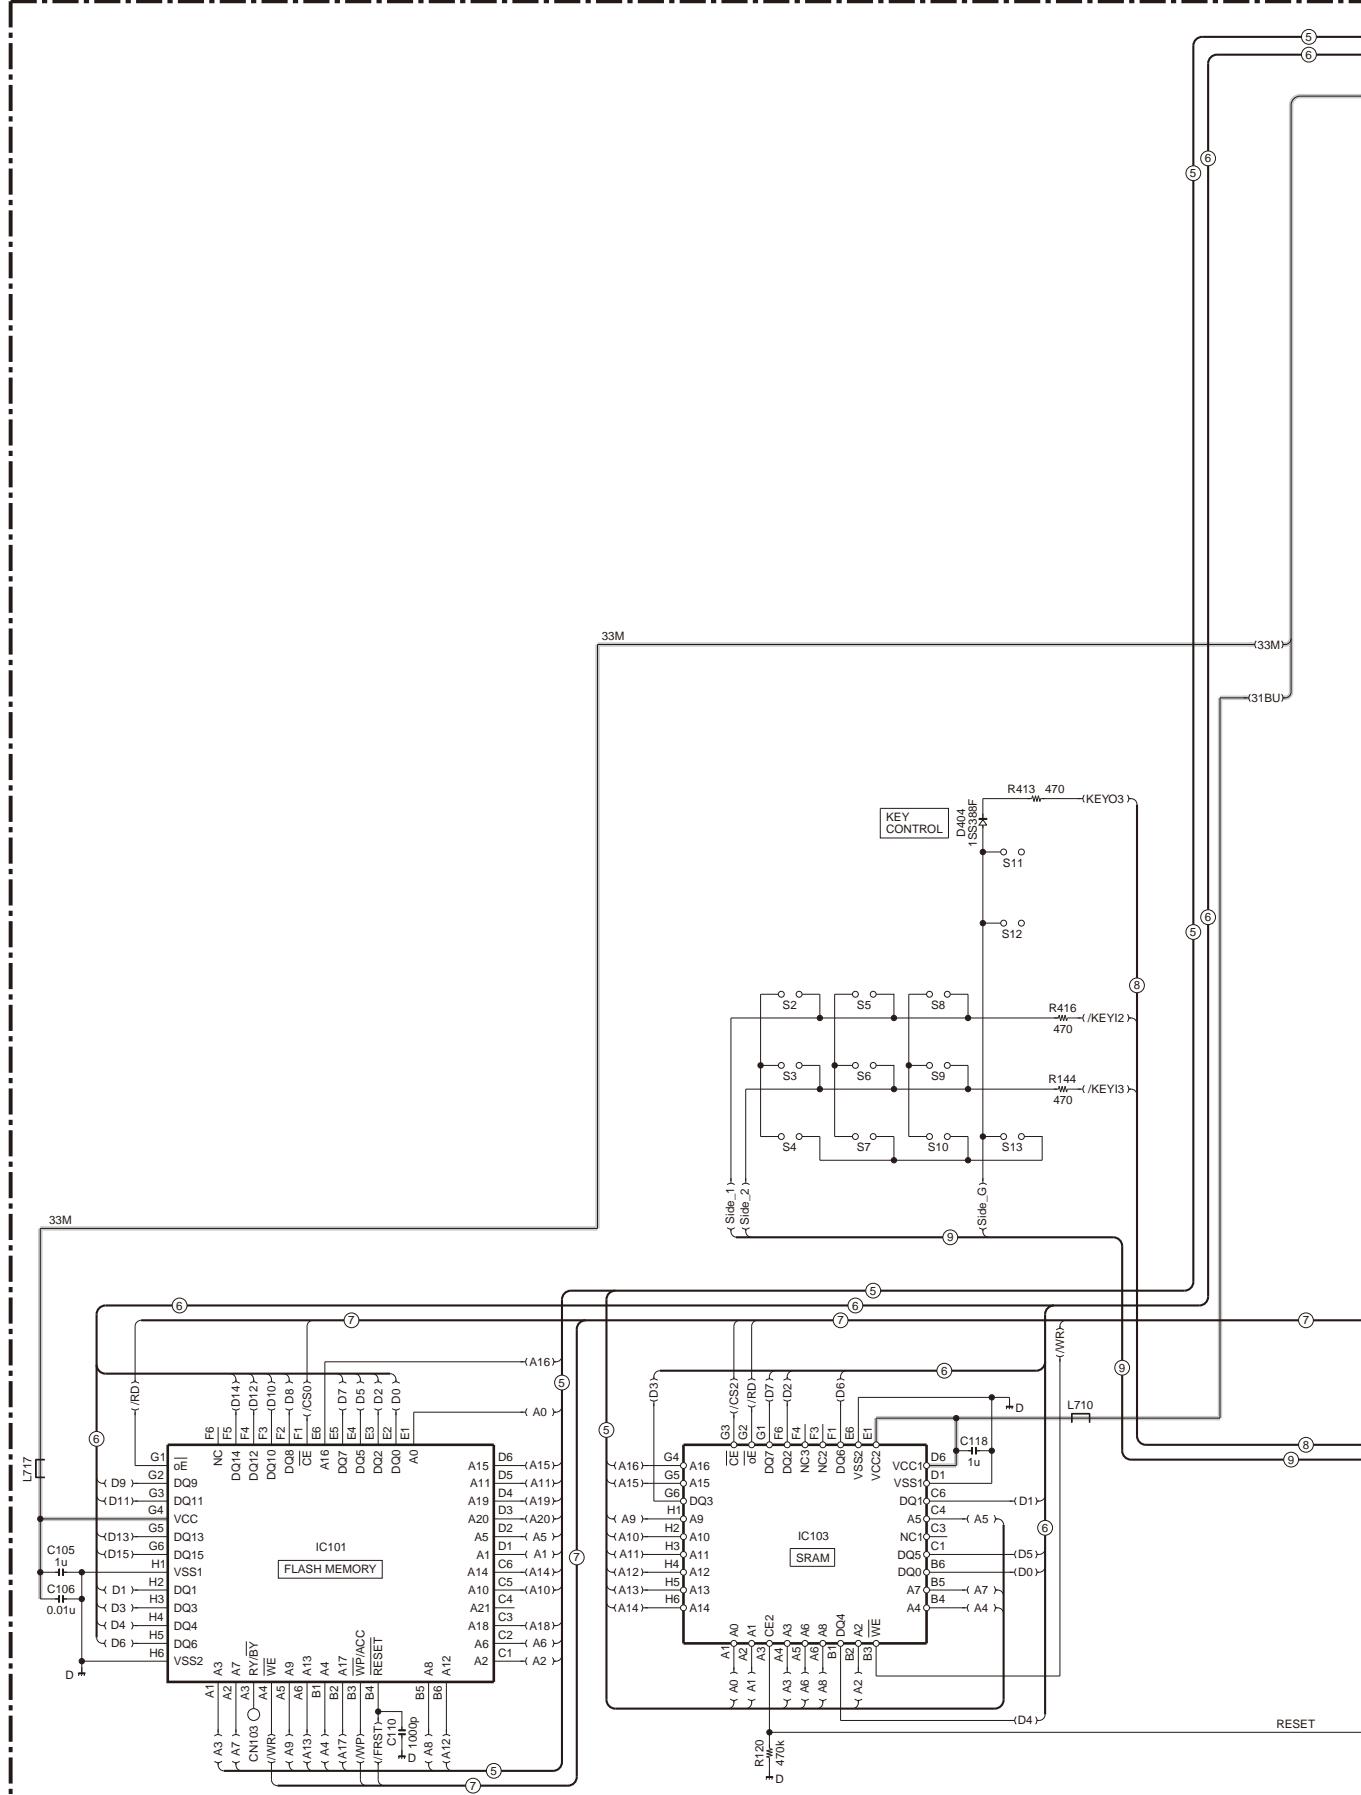


F

G

H


SCHEMATIC DIAGRAM NX-200(S)

CONTROL UNIT (X53-4432-75)

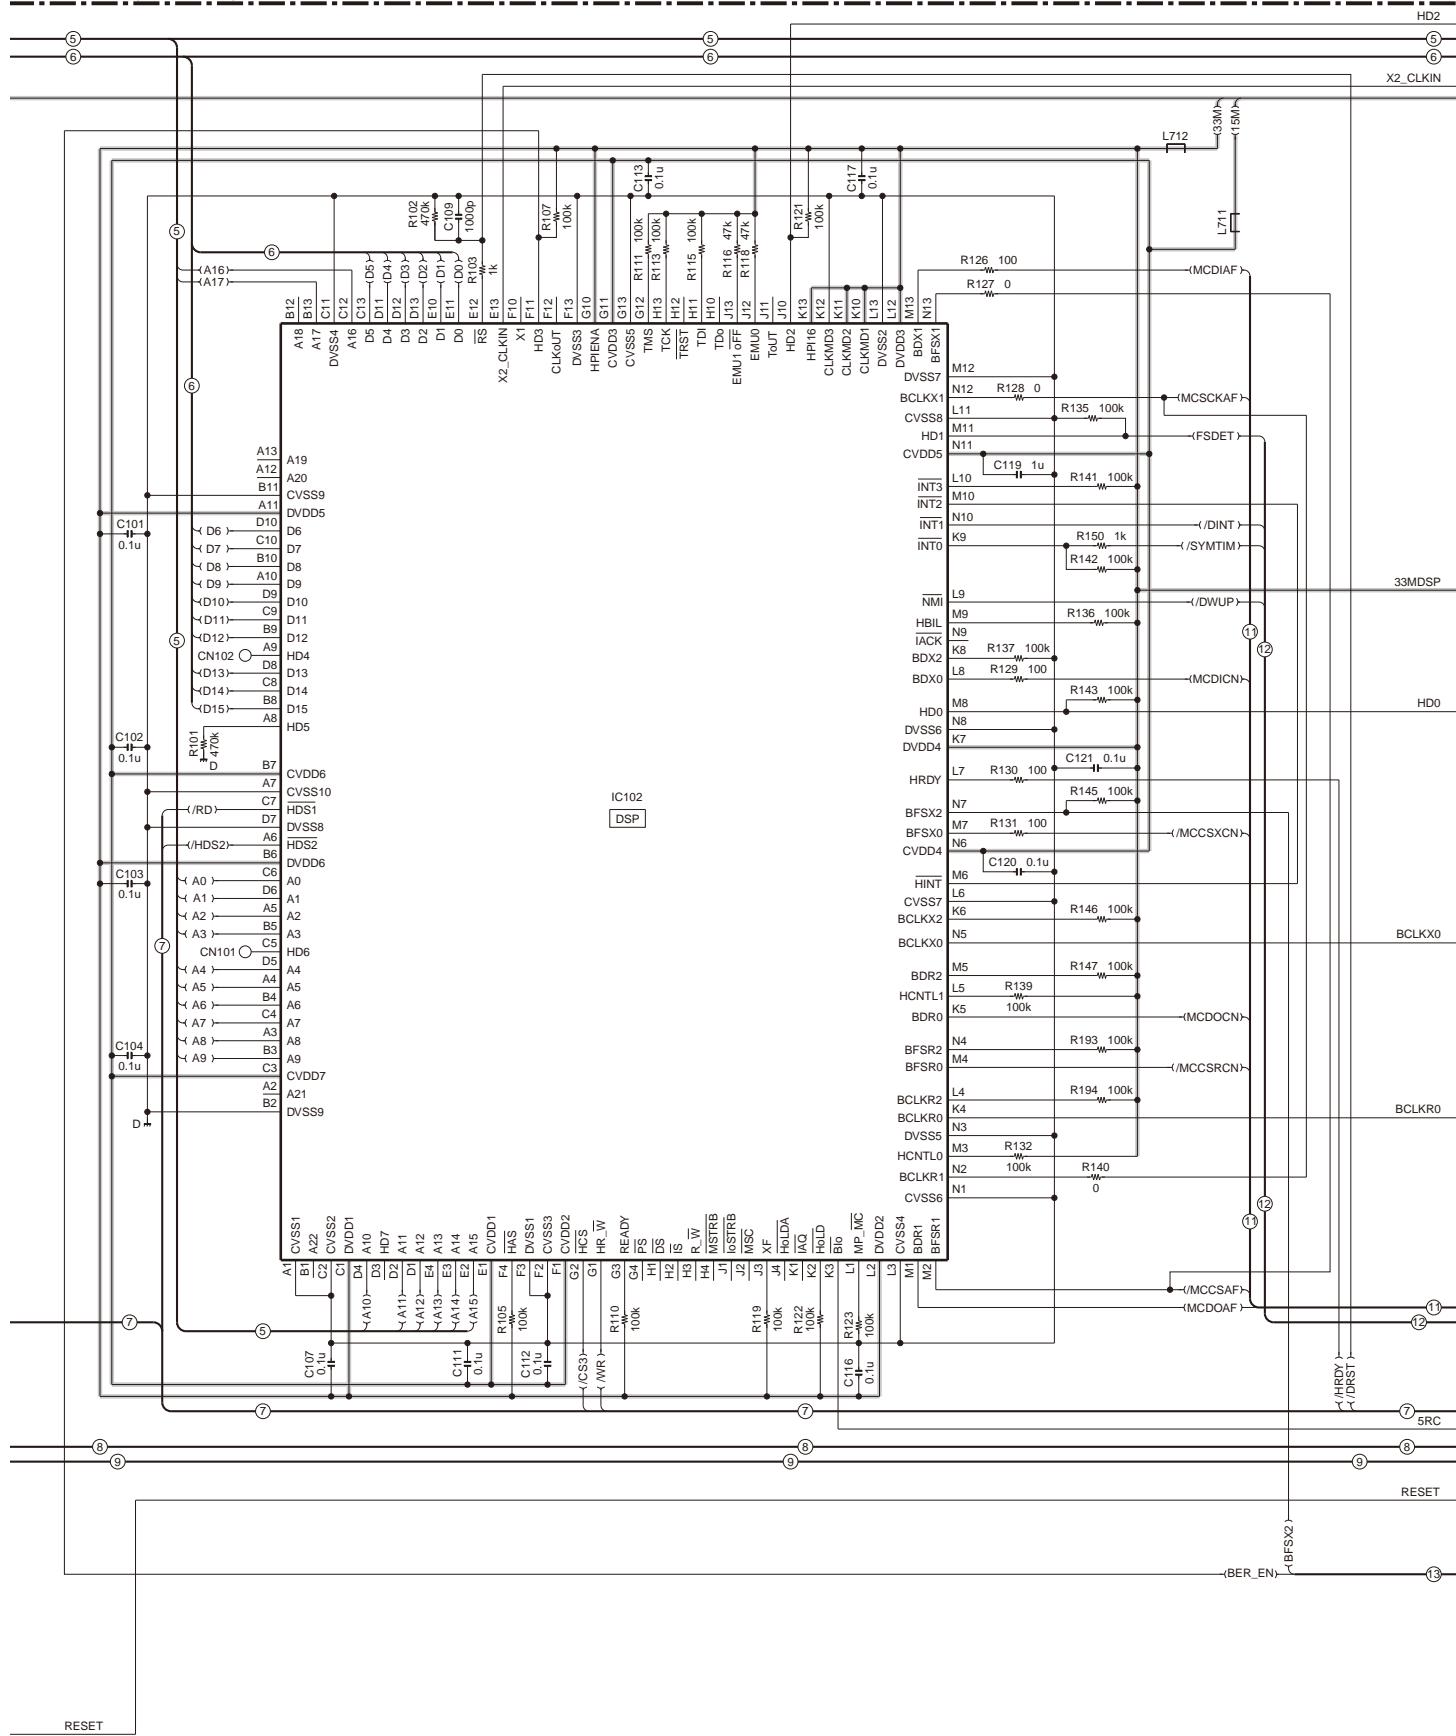


NX-200(S) SCHEMATIC DIAGRAM

CONTROL UNIT (X53-4432-75)

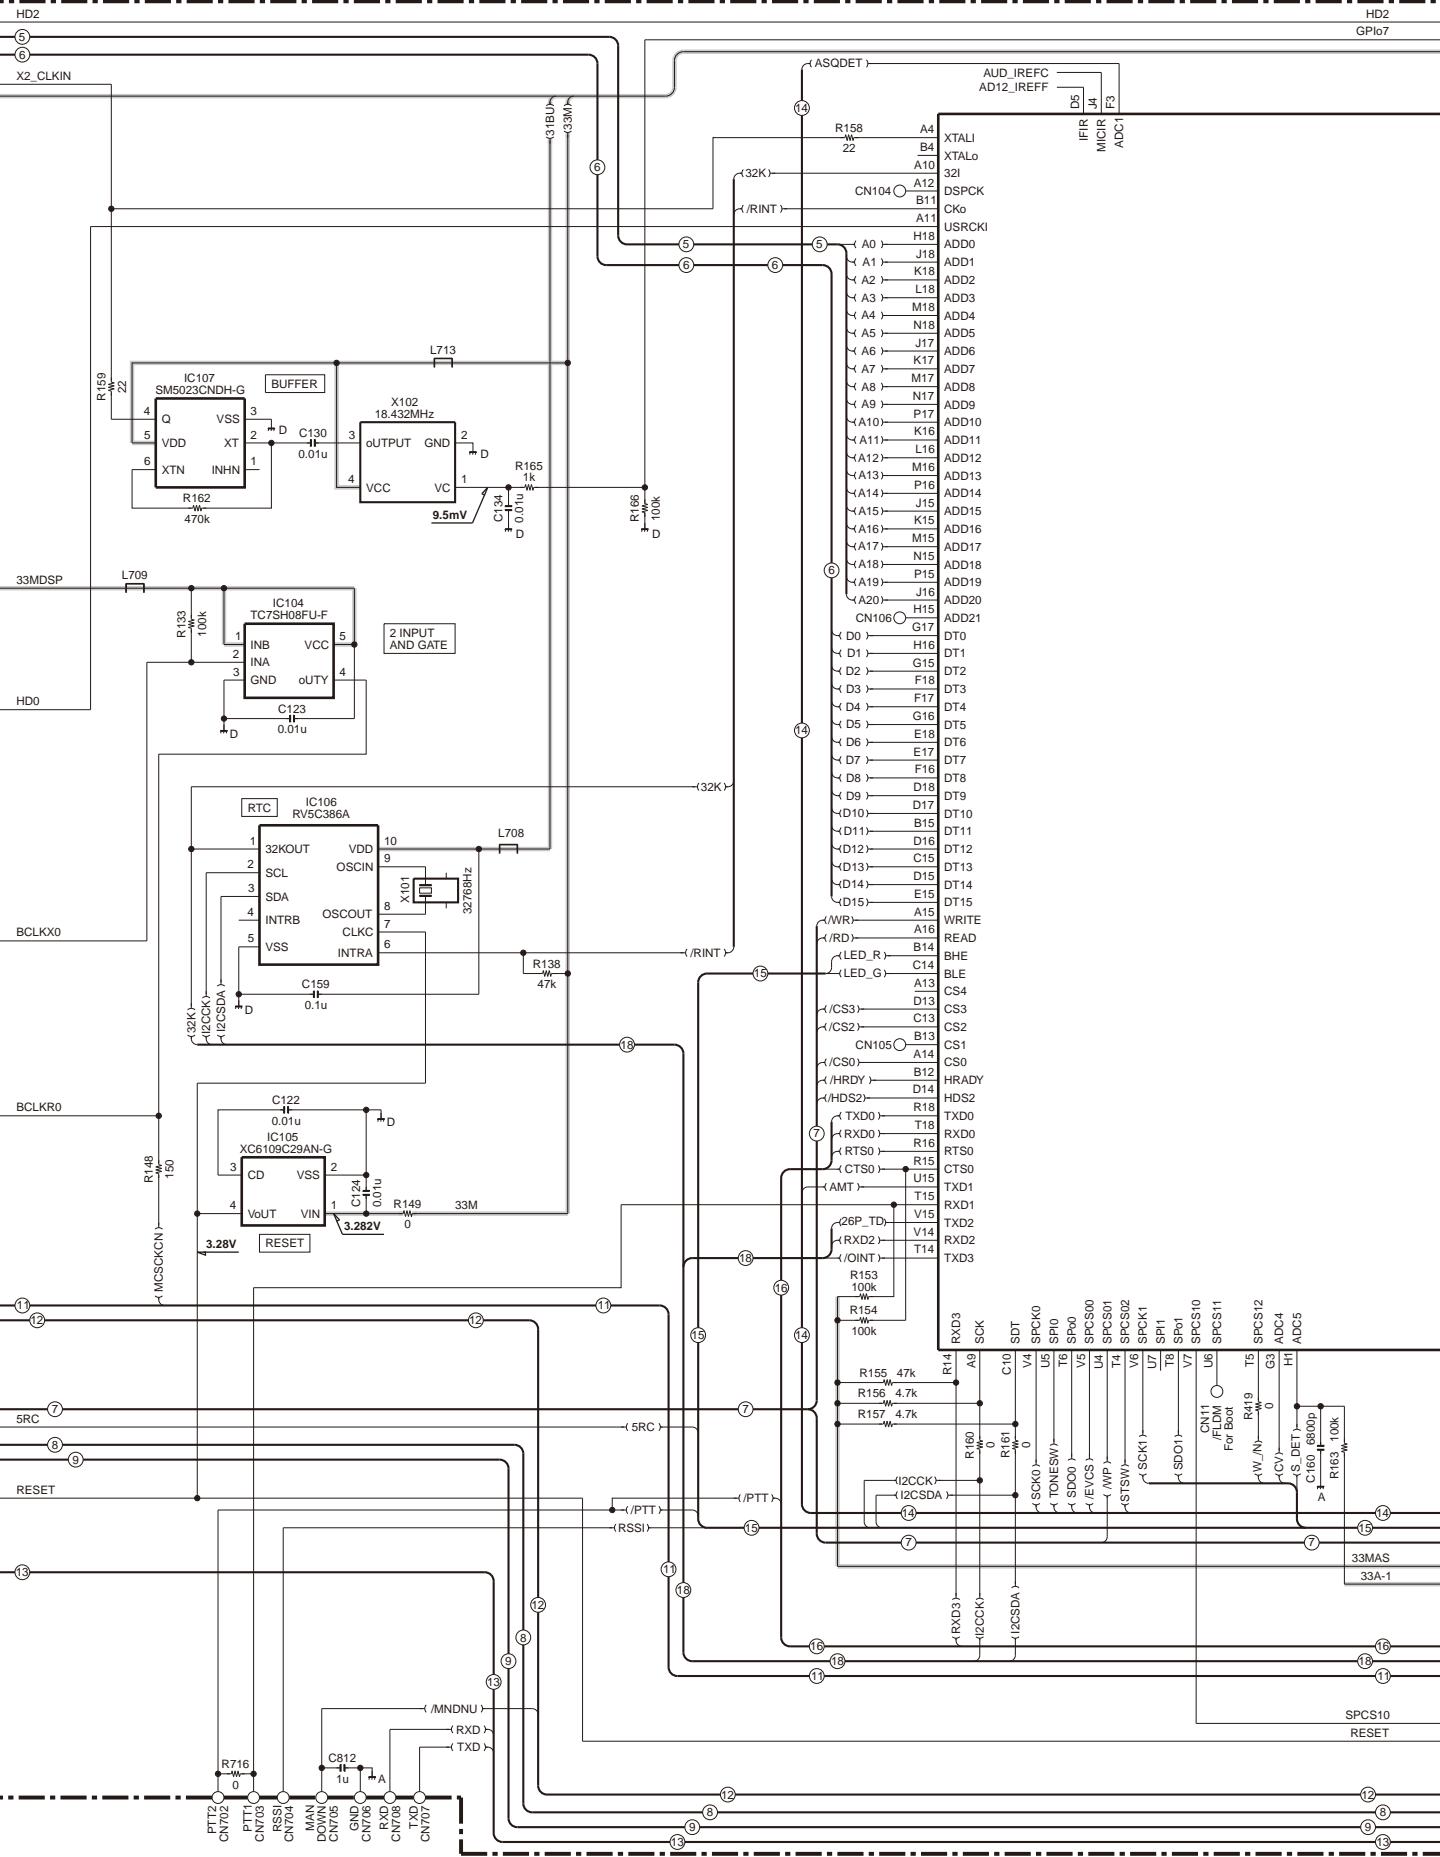


NX-200(S) SCHEMATIC DIAGRAM

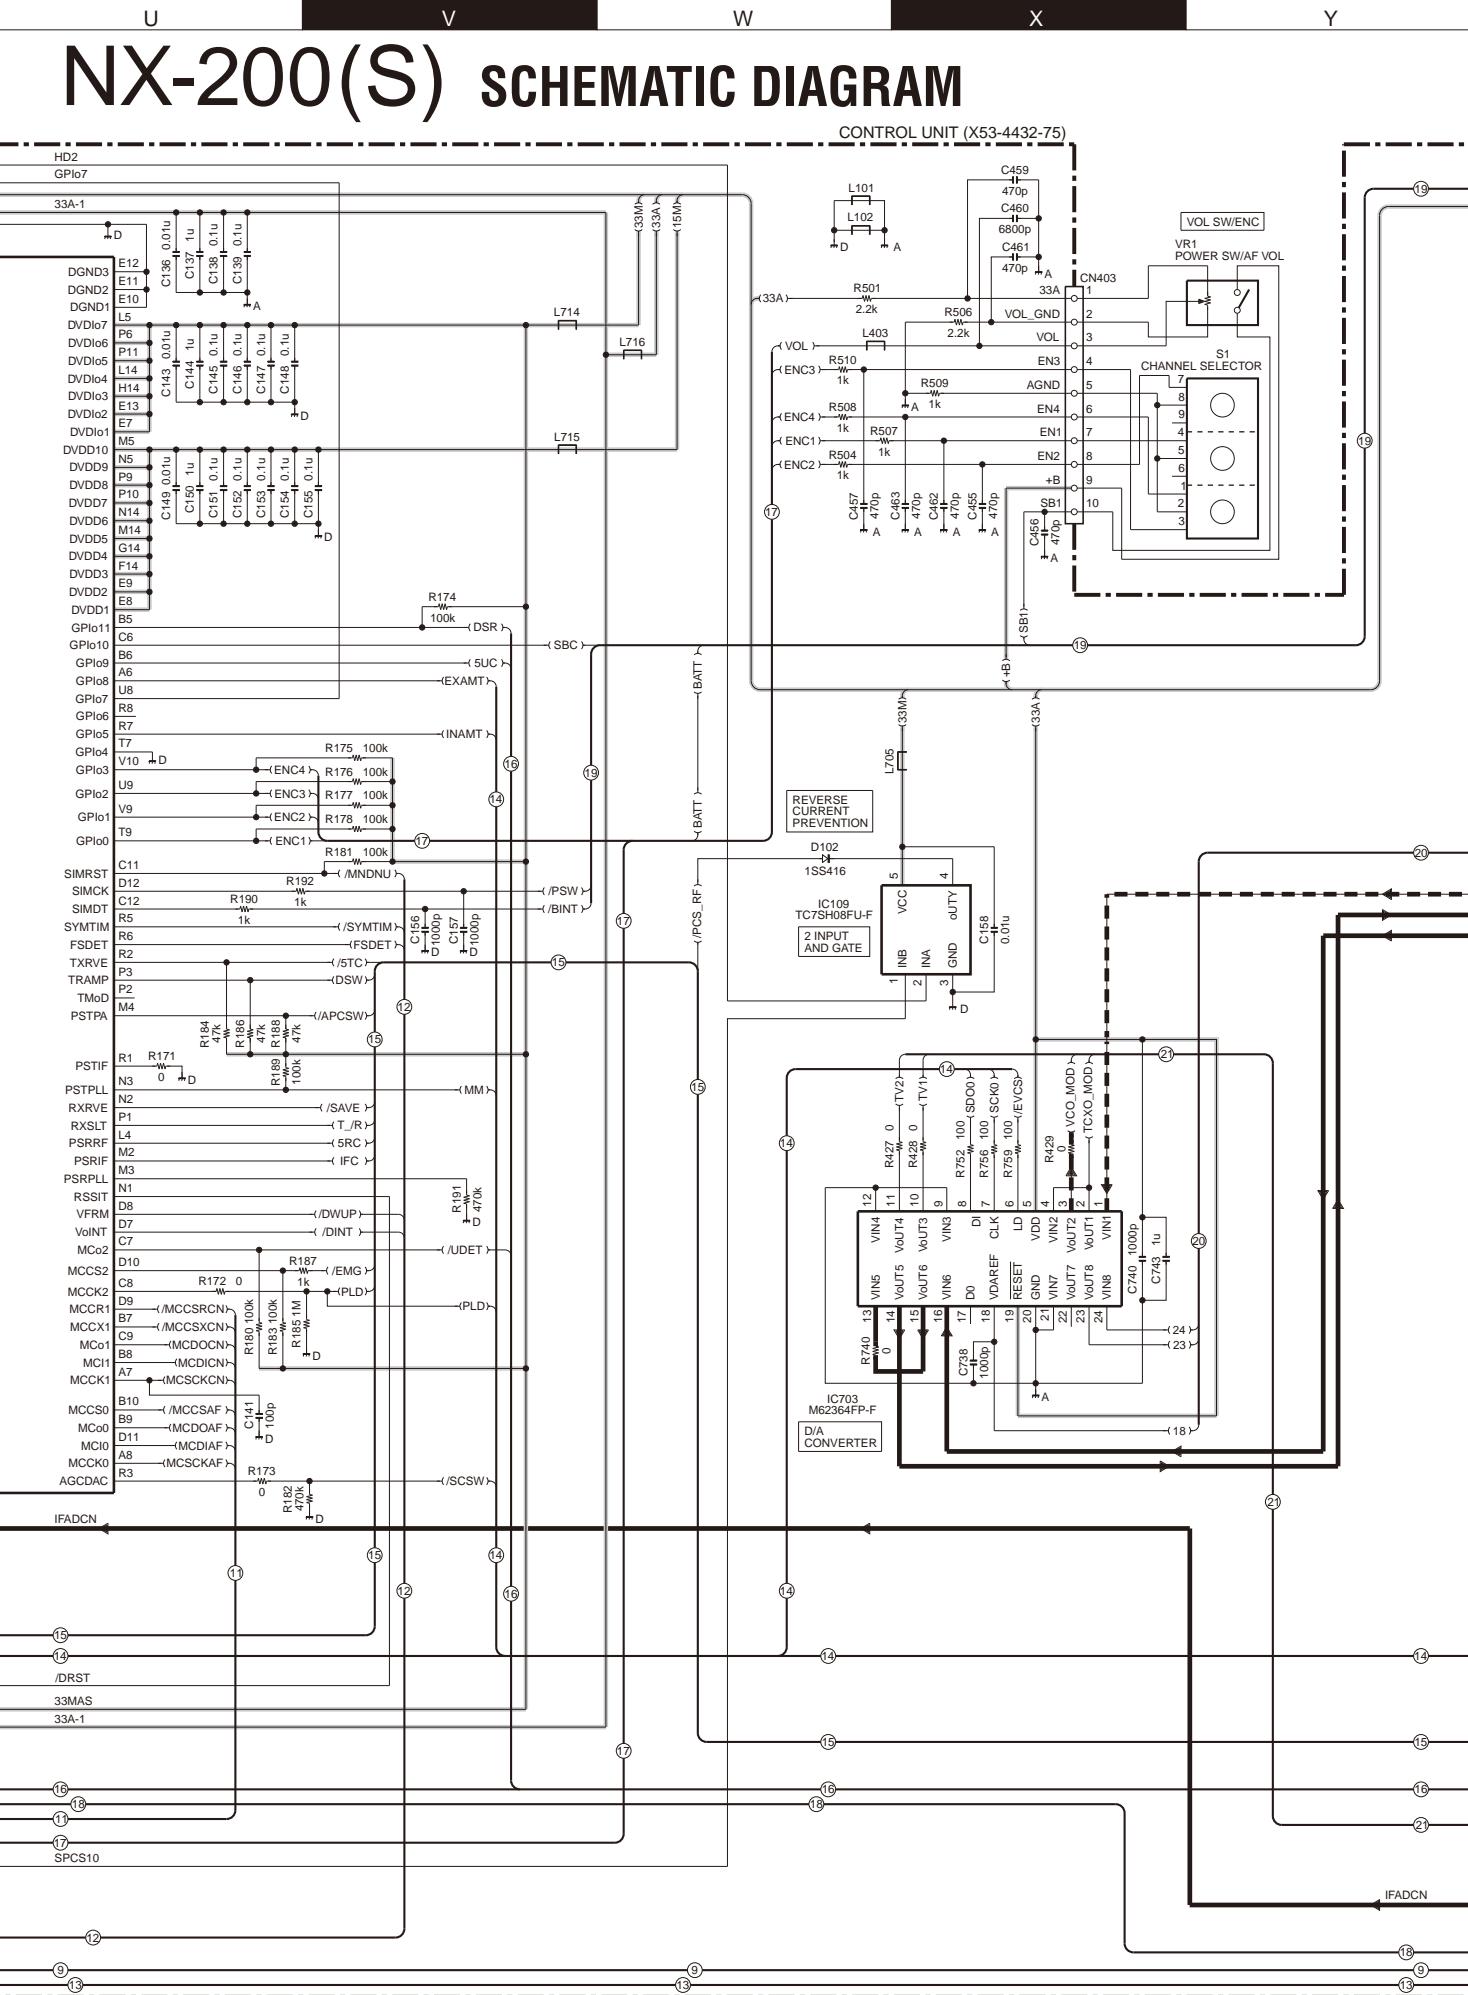

SCHEMATIC DIAGRAM


NX-200(S)

CONTROL UNIT (X53-4432-75)

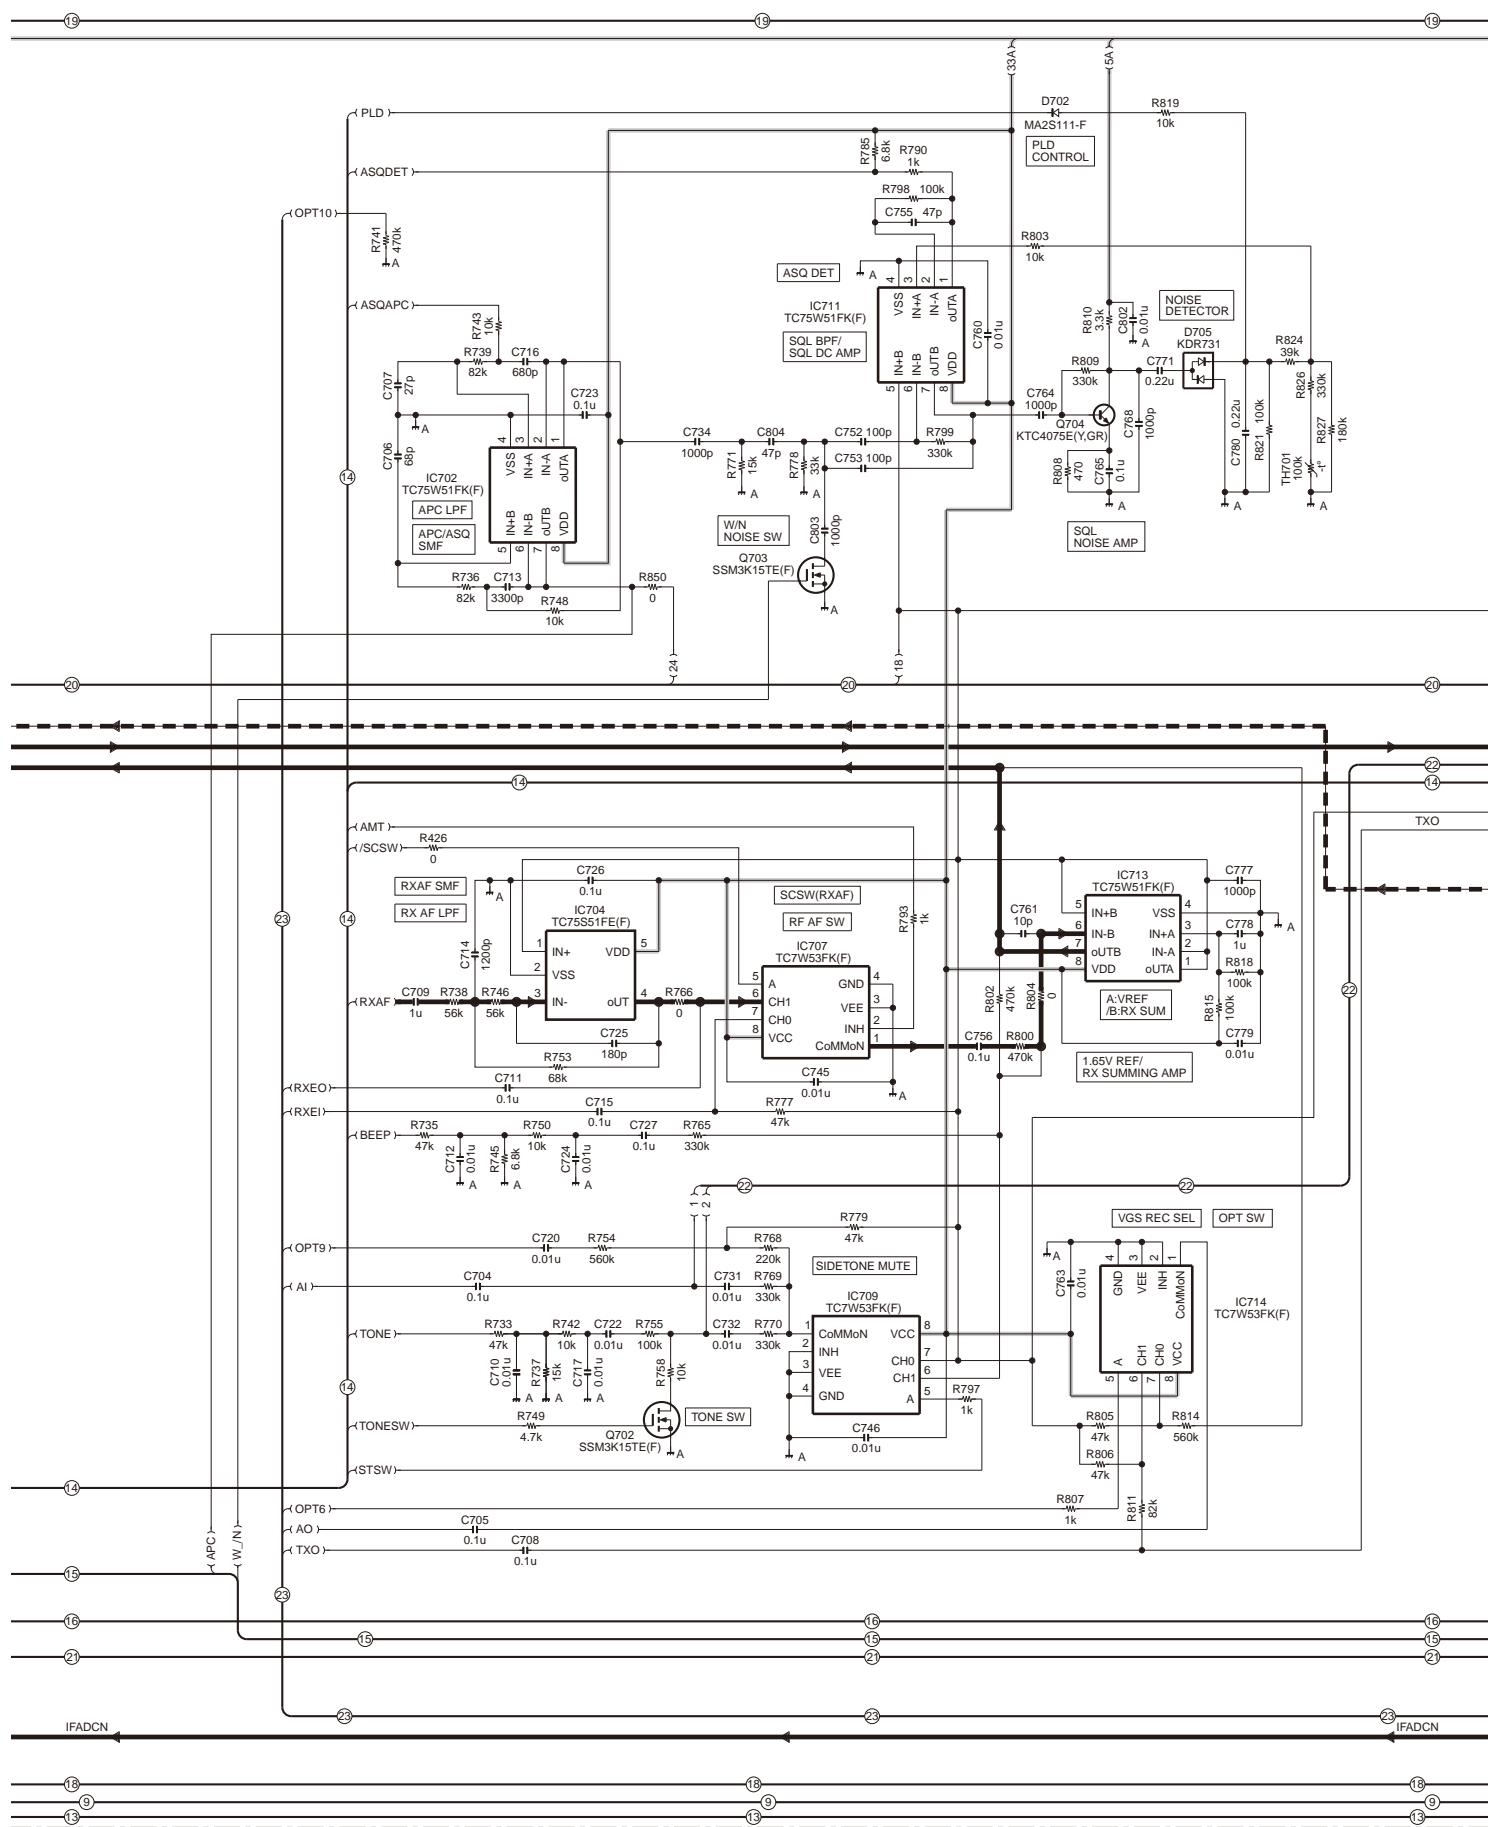

NX-200(S) SCHEMATIC DIAGRAM


CONTROL UNIT (X53-4432-75)

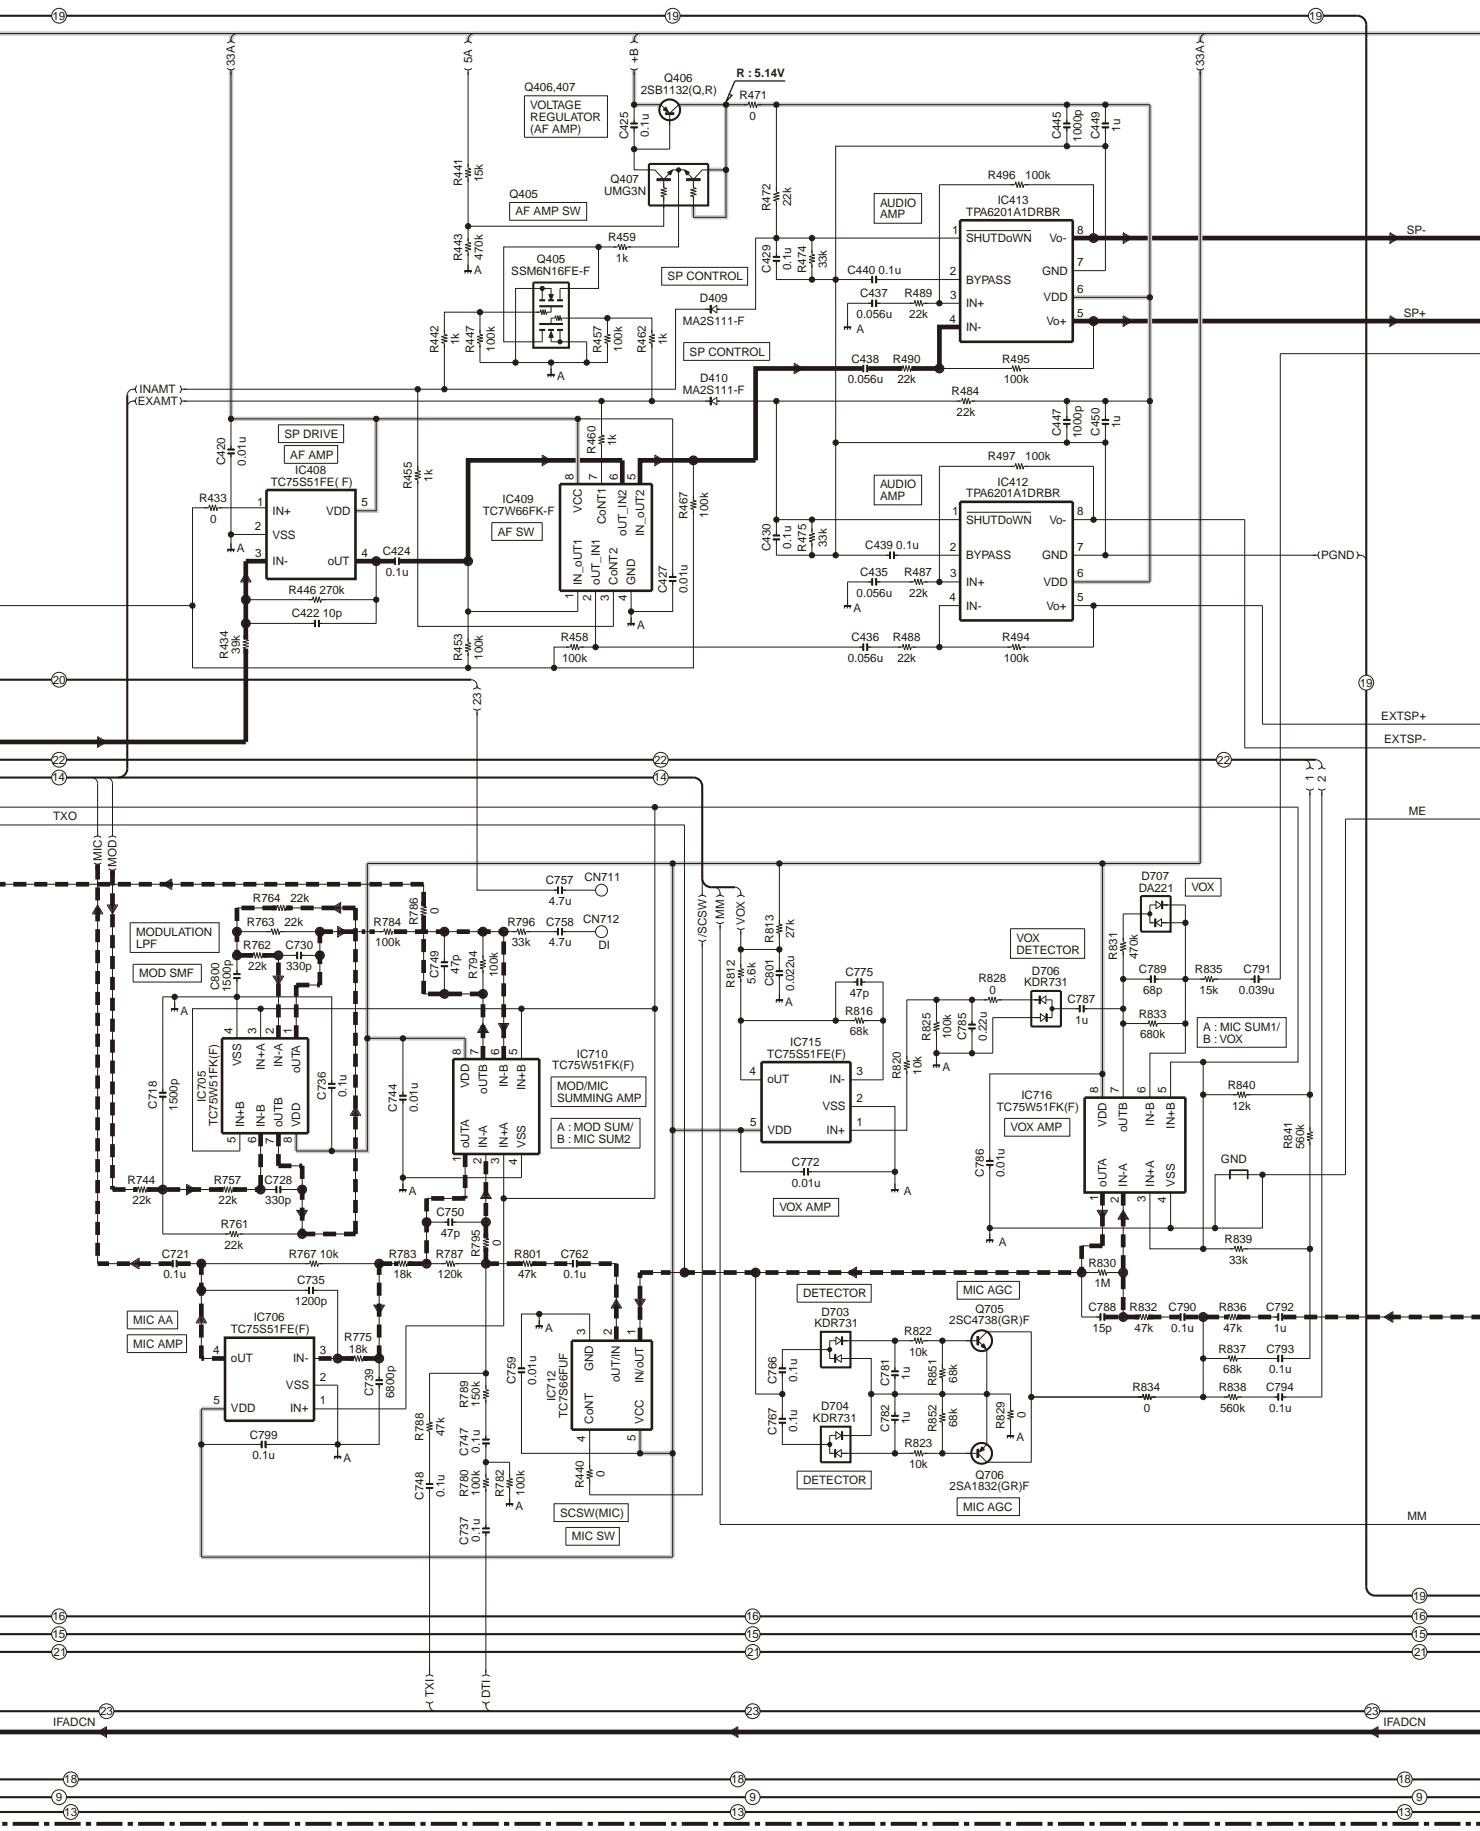

SCHEMATIC DIAGRAM

NX-200(S)


CONTROL UNIT (X53-4432-75)

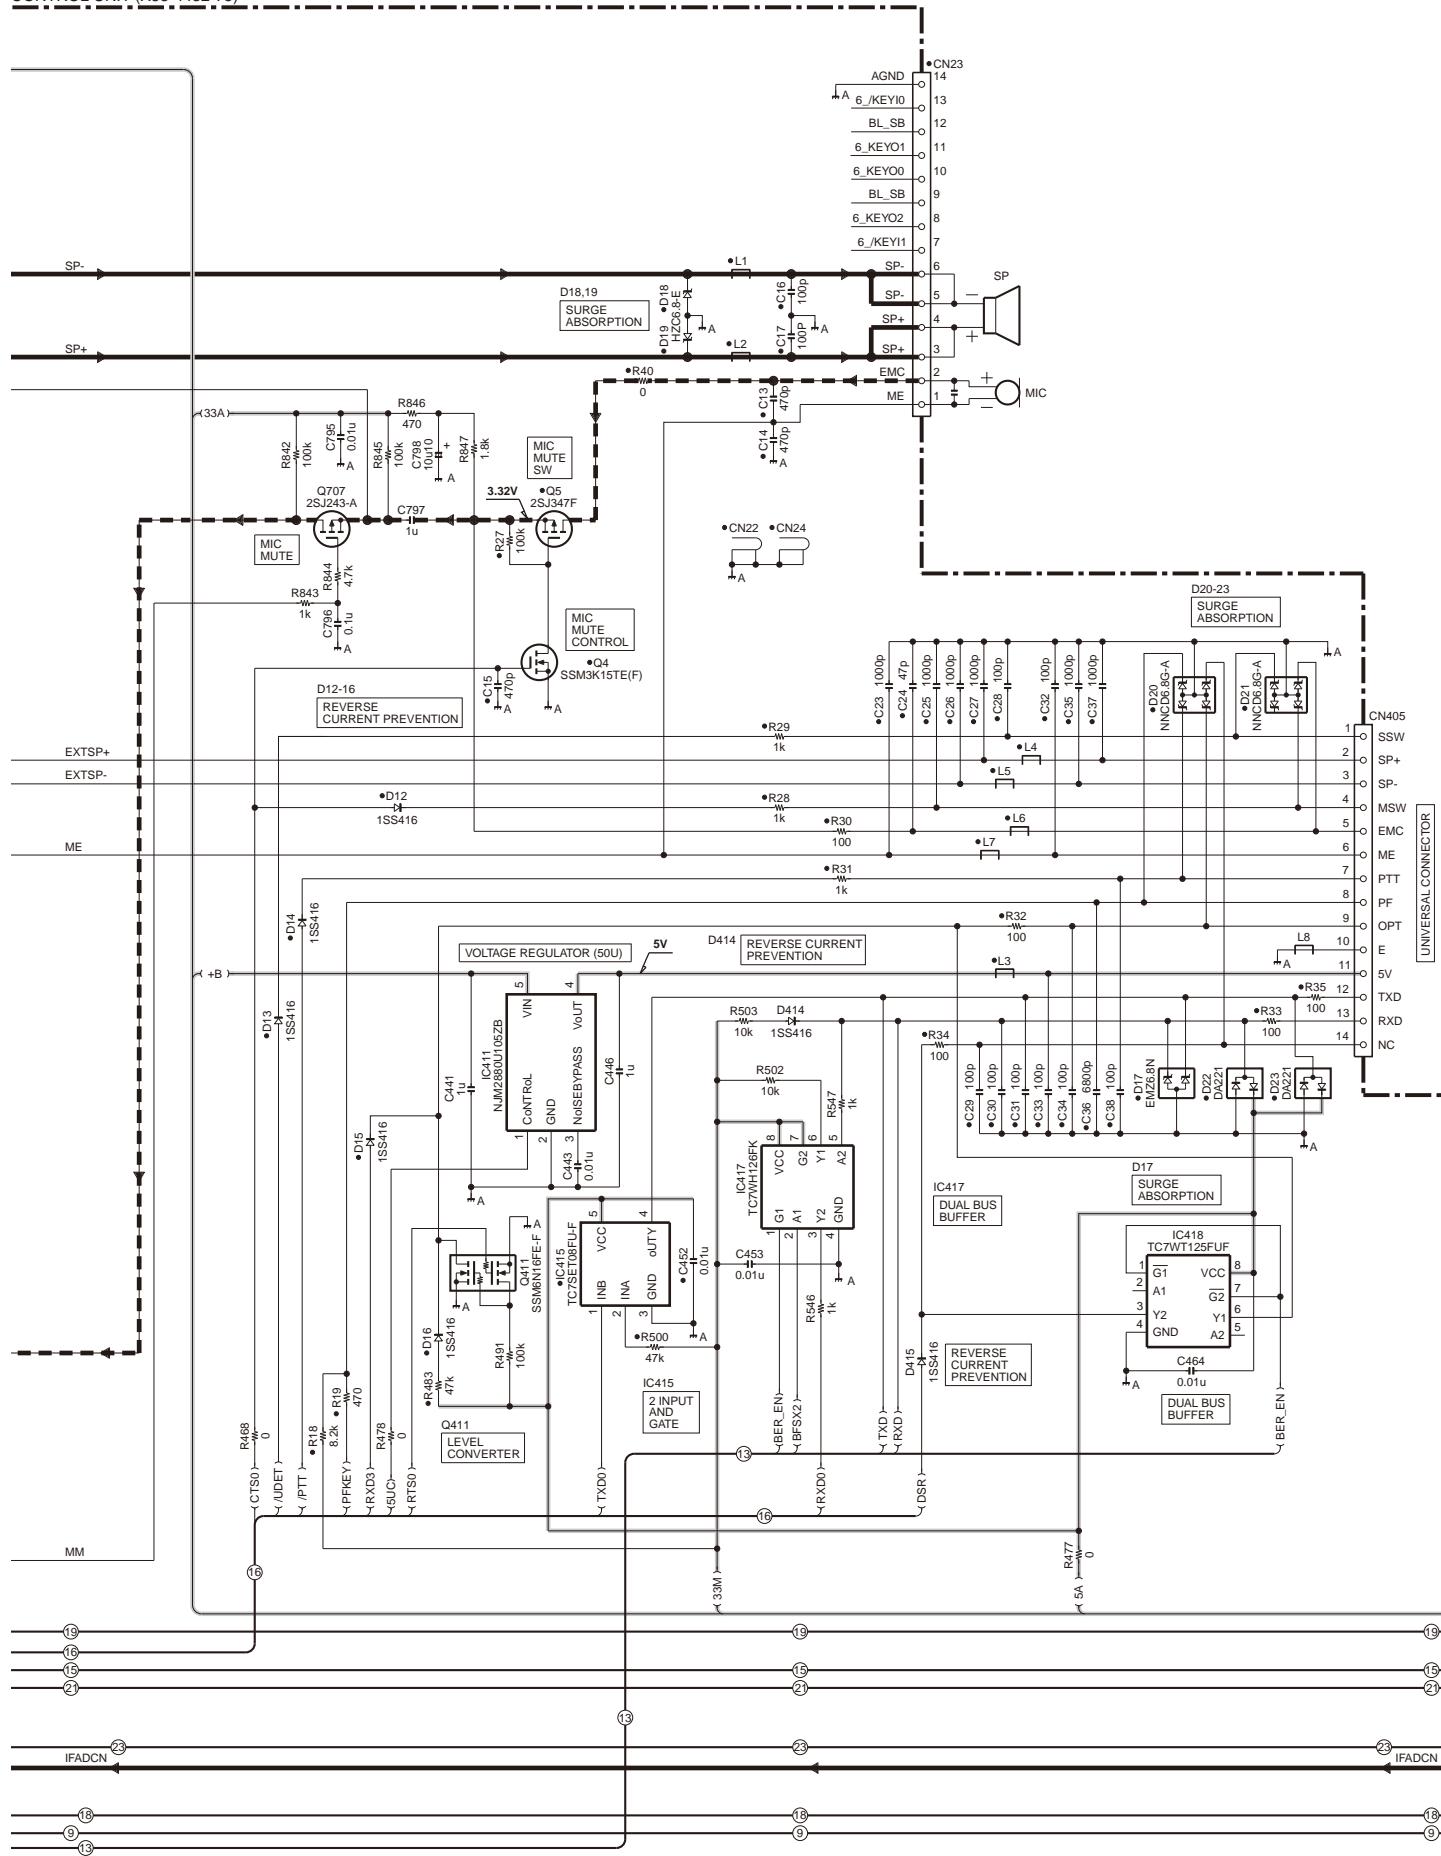

UNIVERSAL CONNECTOR

NX-200(S) SCHEMATIC DIAGRAM


CONTROL UNIT (X53-4432-75)

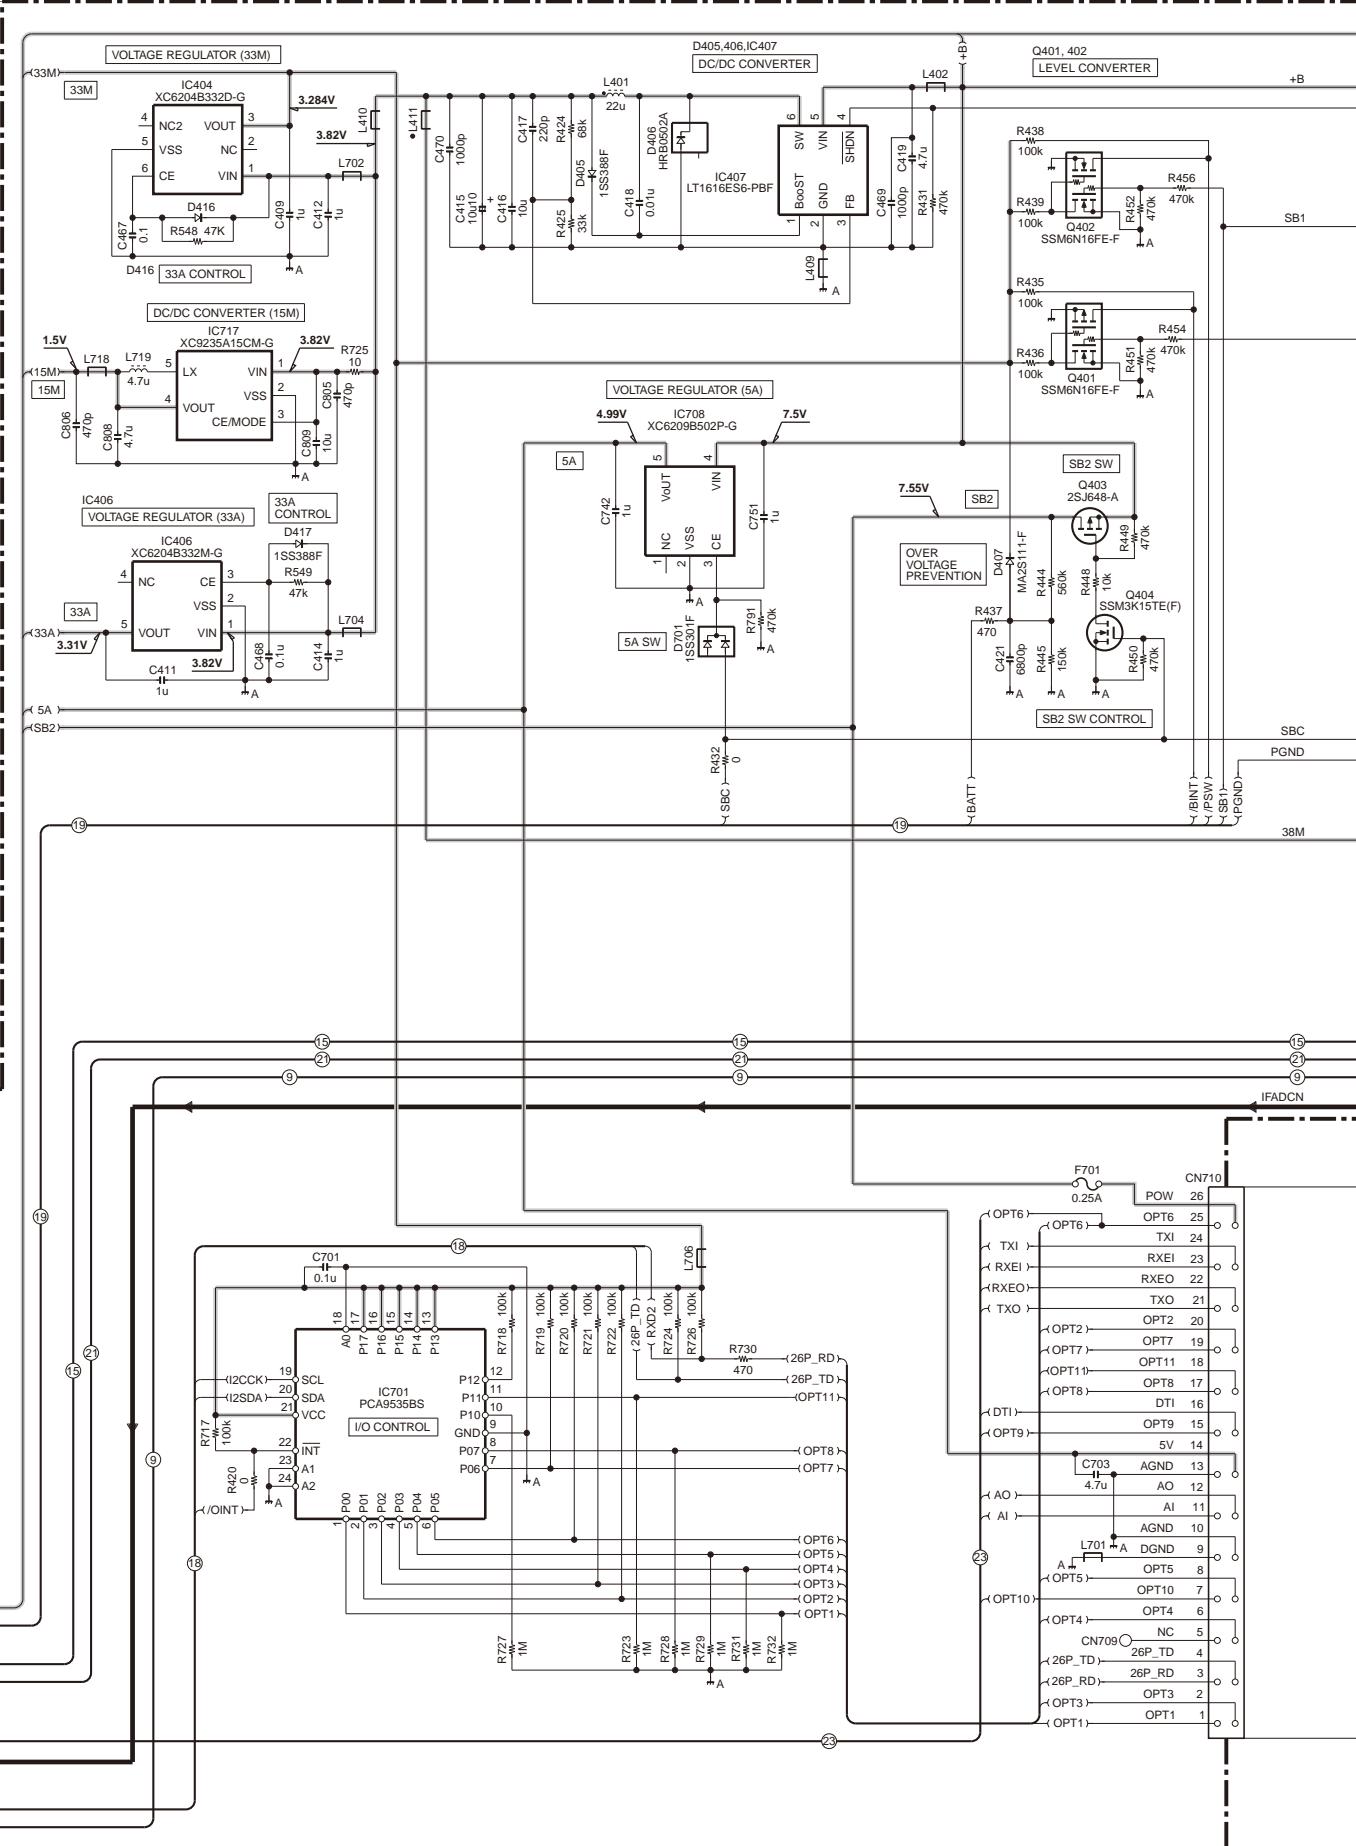

SCHEMATIC DIAGRAM

NX-200(S)


CONTROL UNIT (X53-4432-75)

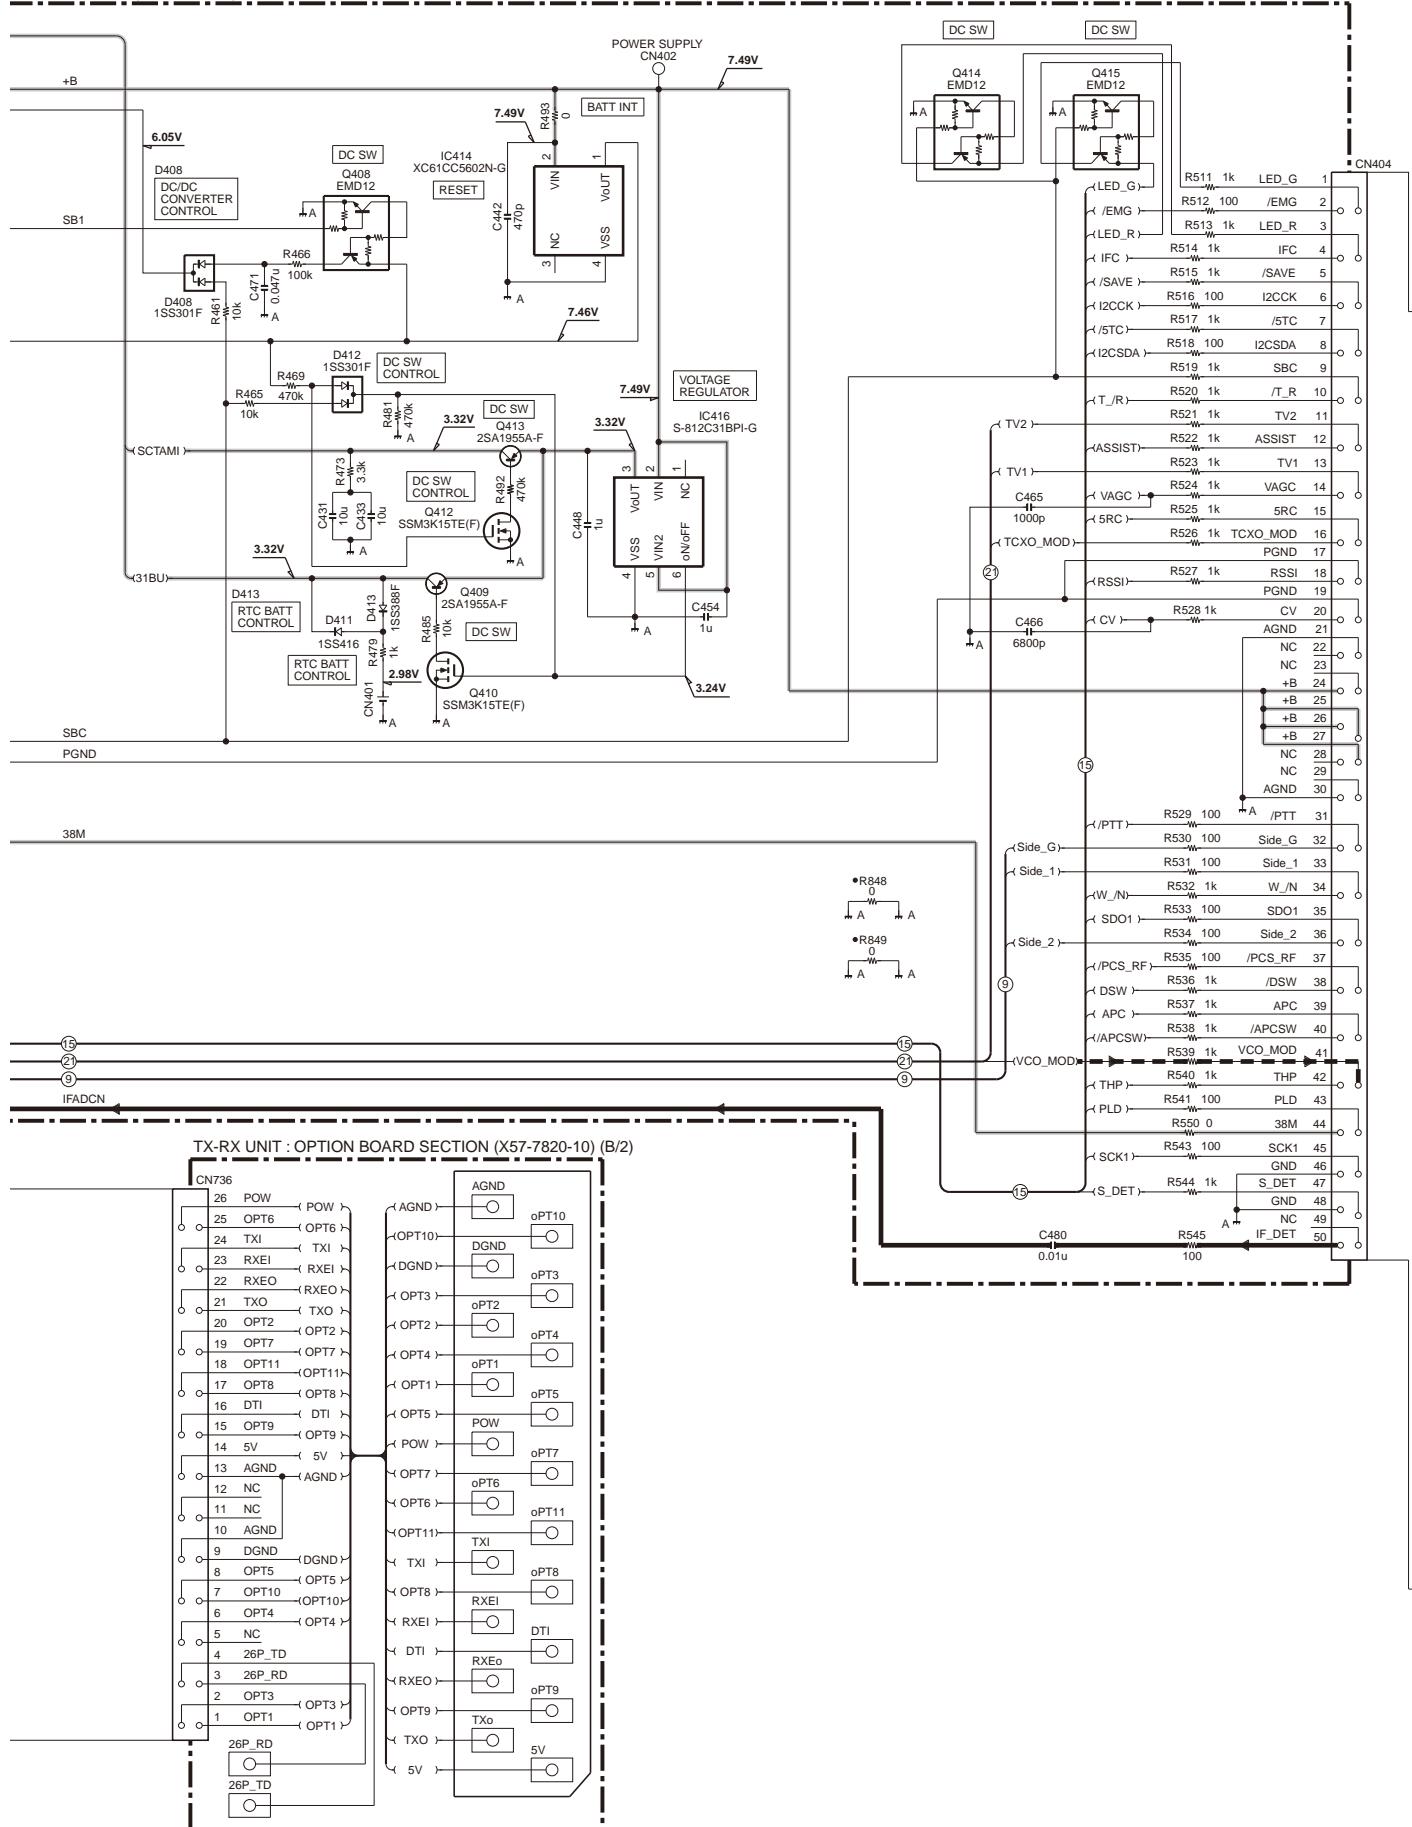

TX-RX UNIT (X57-7820-10) (A/2)-CN400

NX-200(S) SCHEMATIC DIAGRAM


TX-RX UNIT : (X57-7820-10) (A/2)

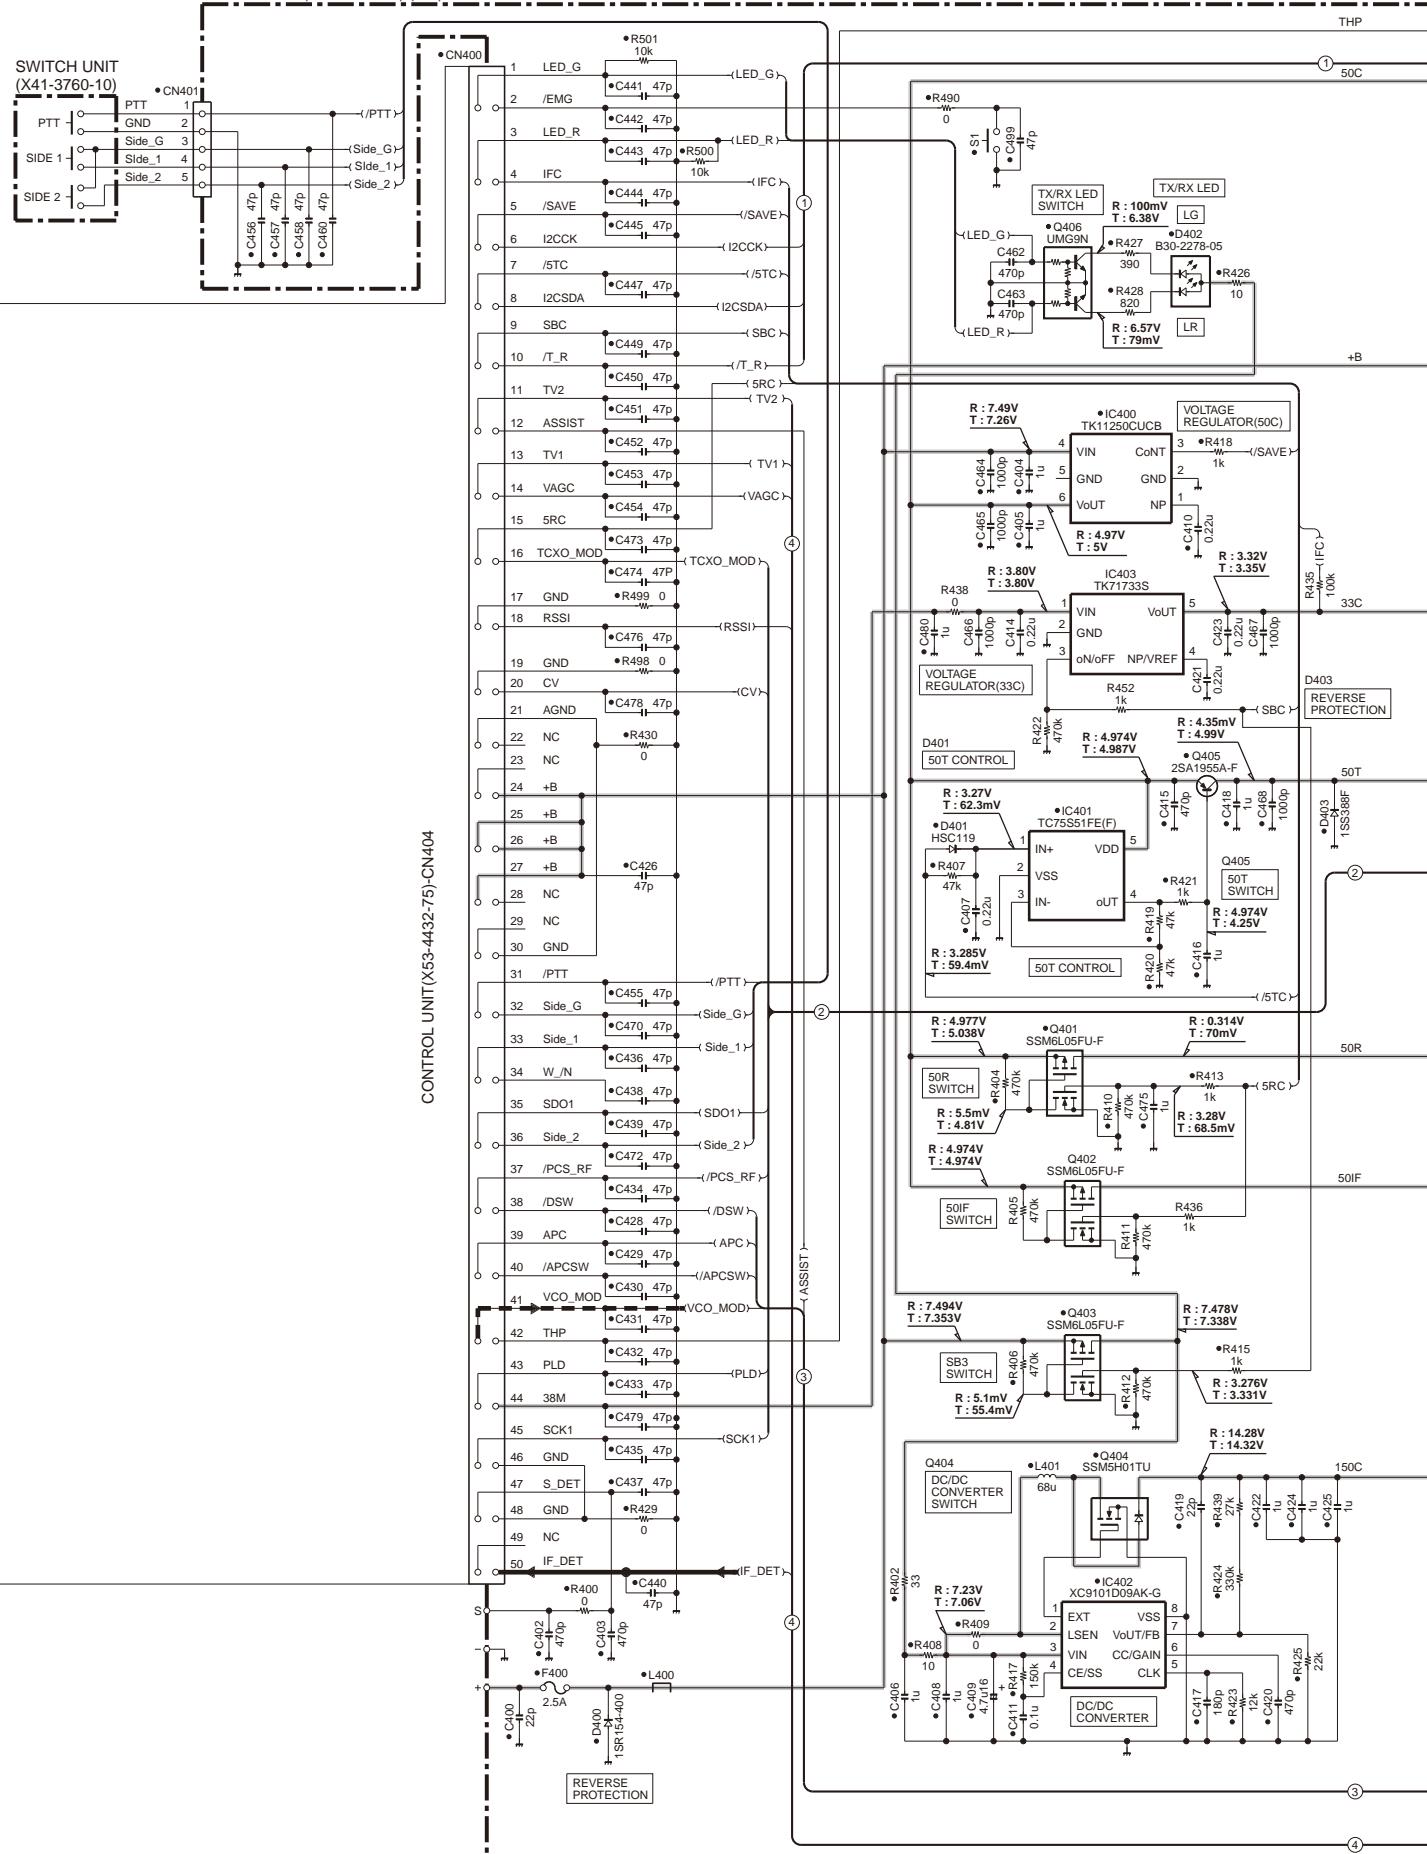


SCHEMATIC DIAGRAM

NX-200(S)

TX-RX UNIT (X57-7820-10) (A/2)

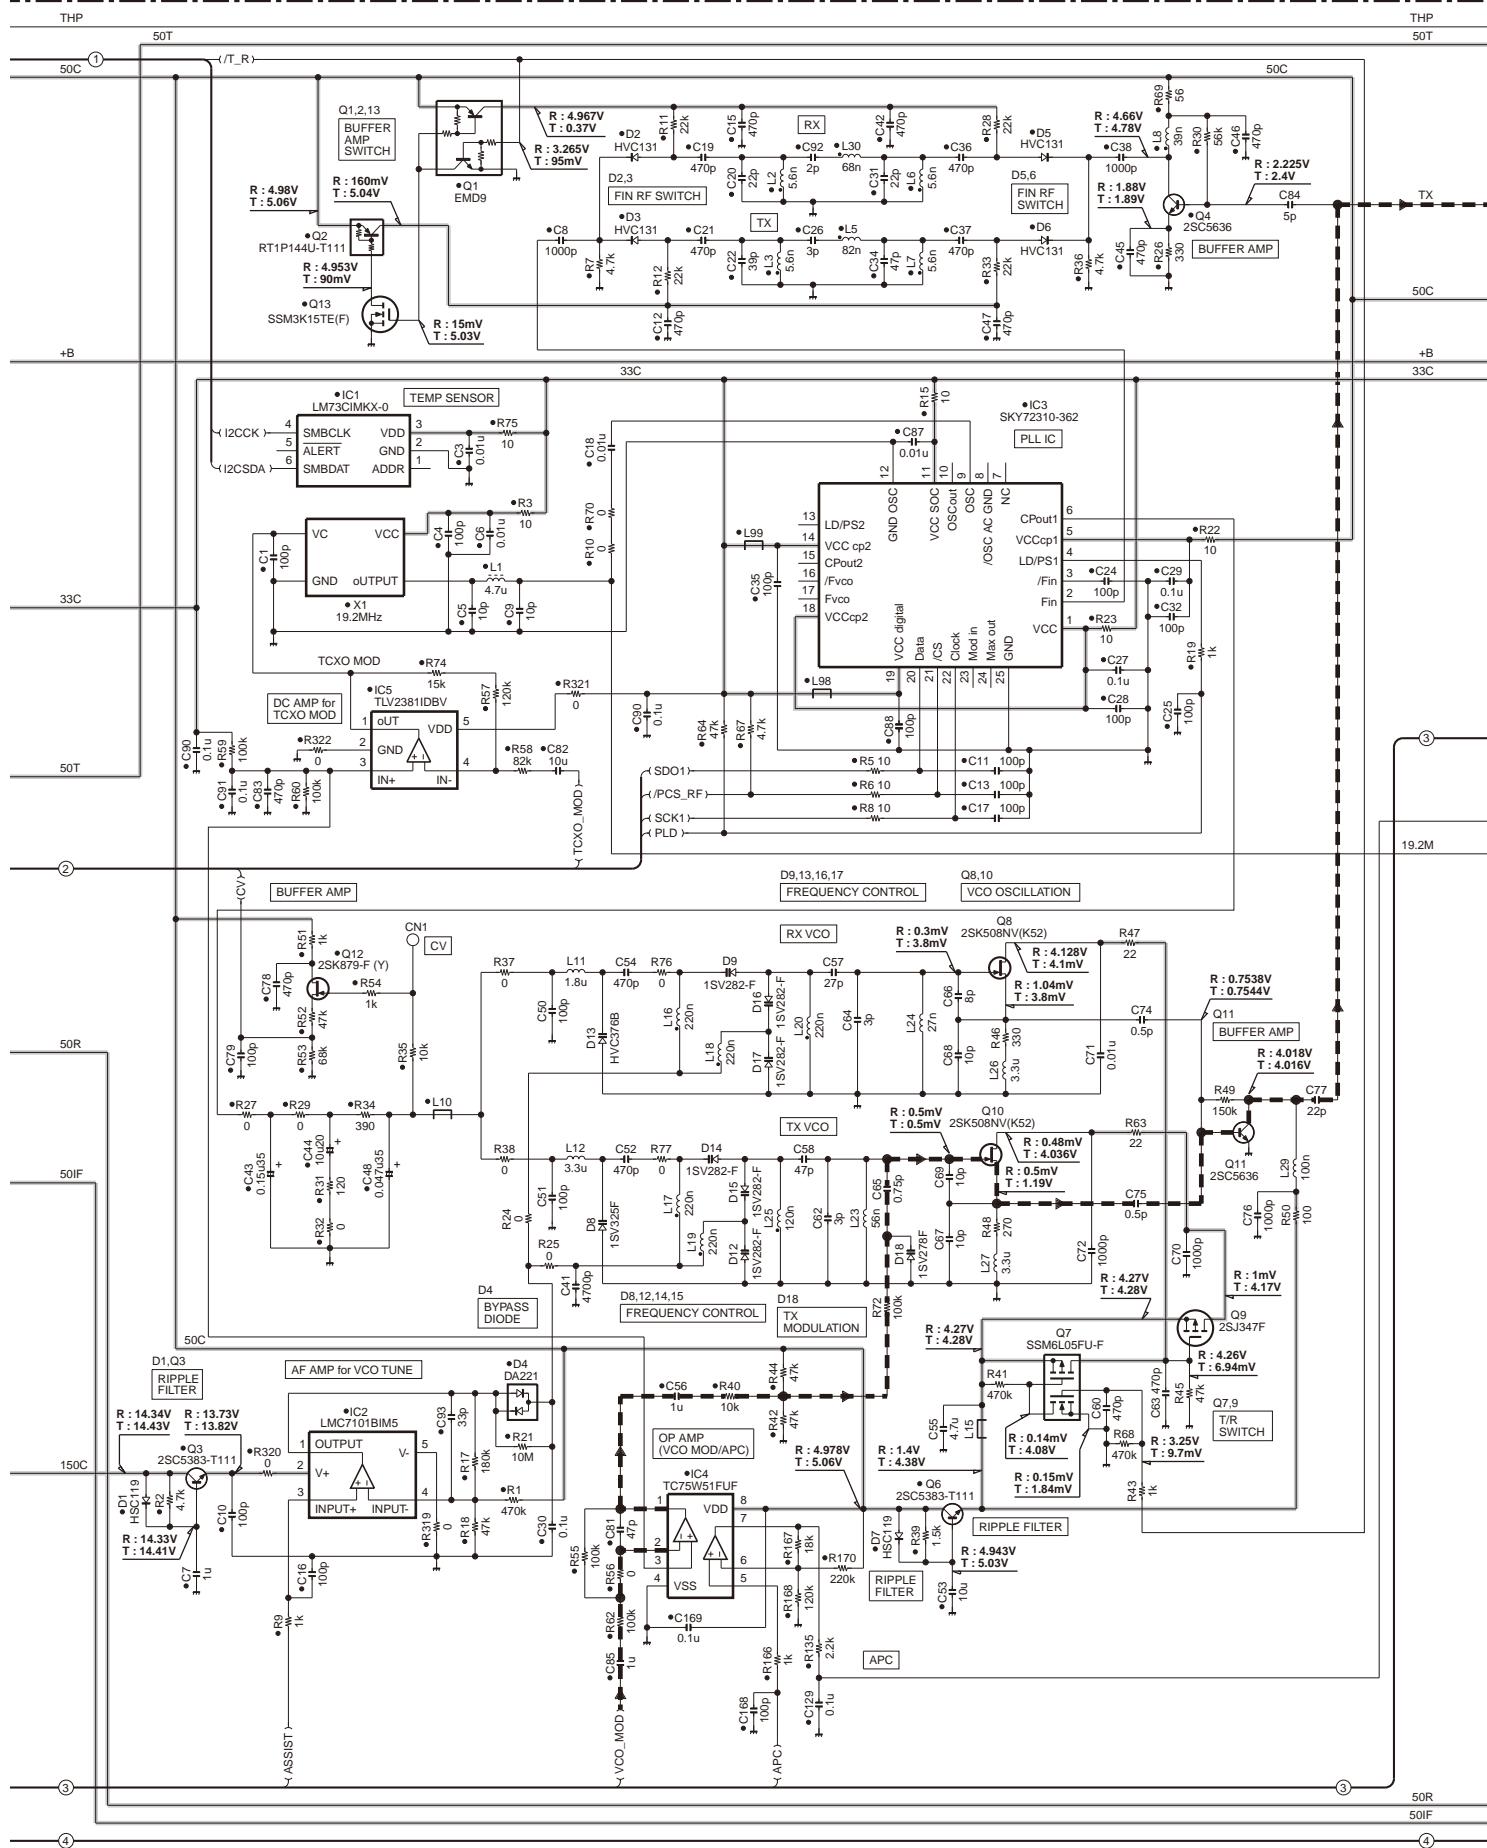


NX-200(S) SCHEMATIC DIAGRAM

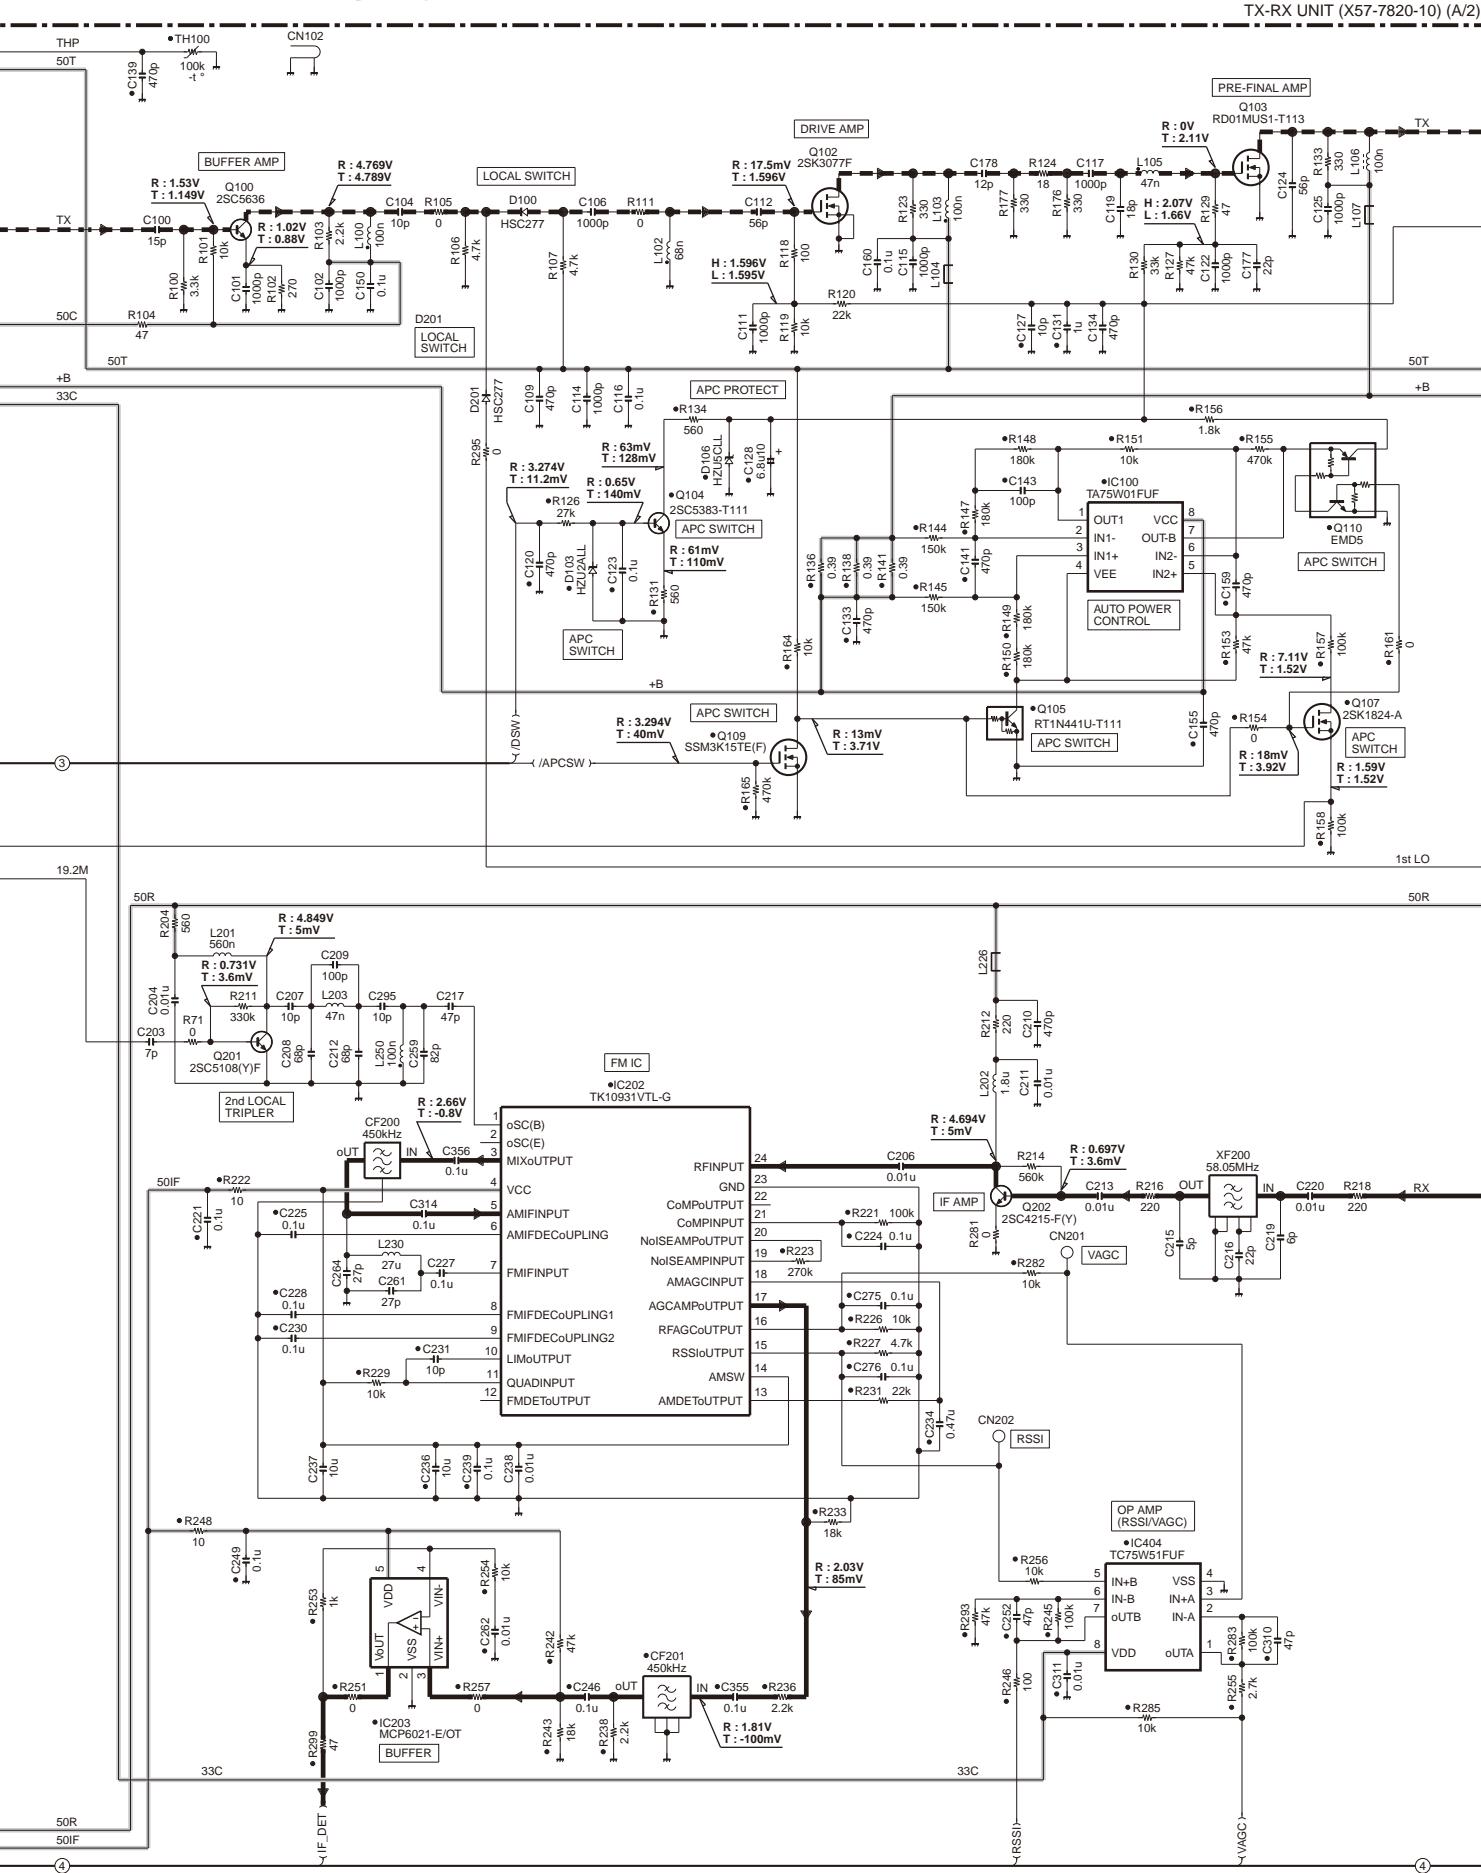

SCHEMATIC DIAGRAM


NX-200(S)

TX-RX UNIT (X57-7820-10) (A/2)

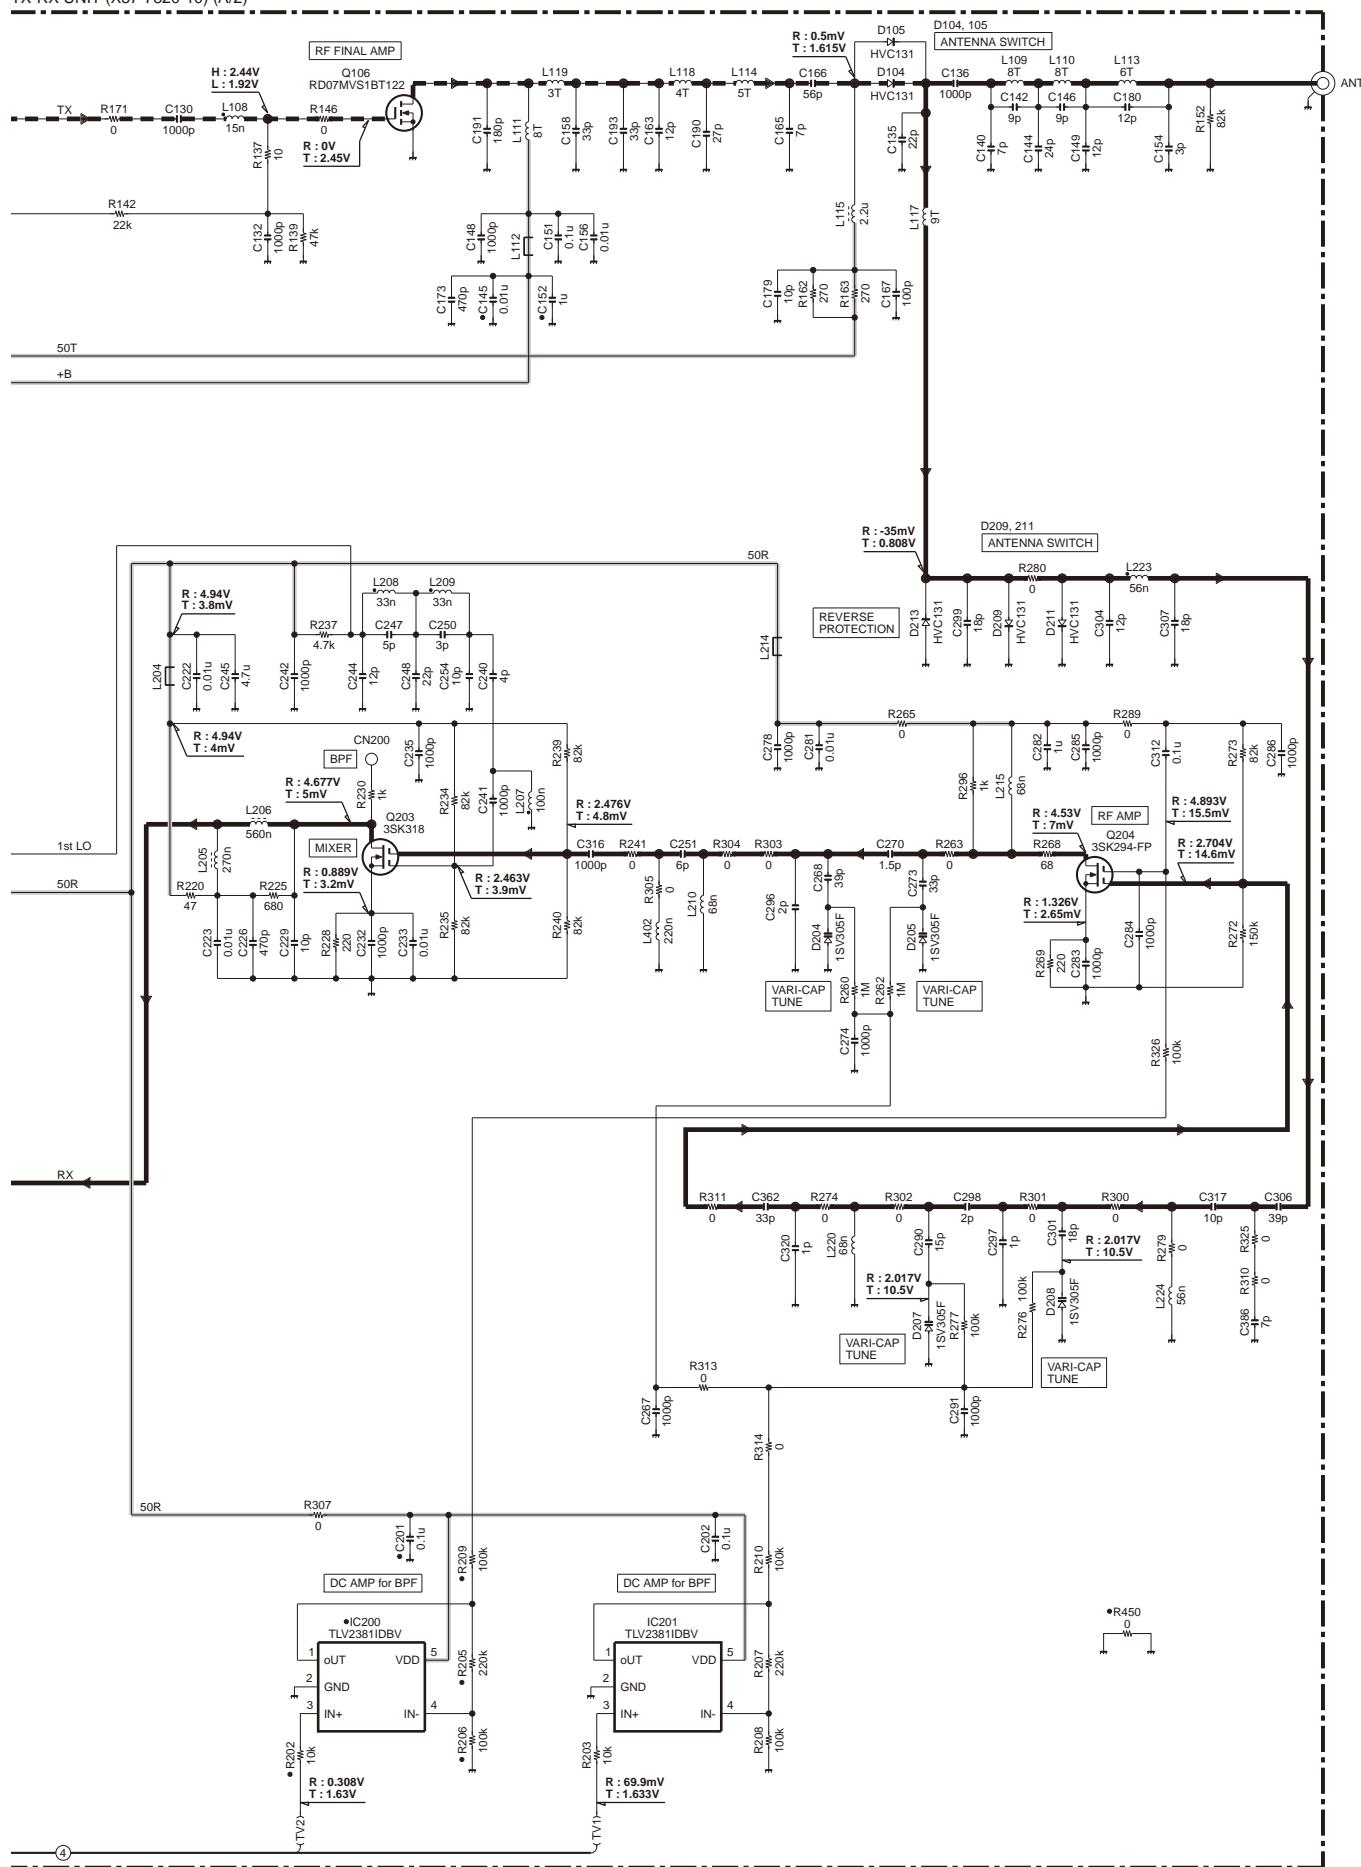


NX-200(S) BLOCK DIAGRAM

Control unit (X53-4432-75)

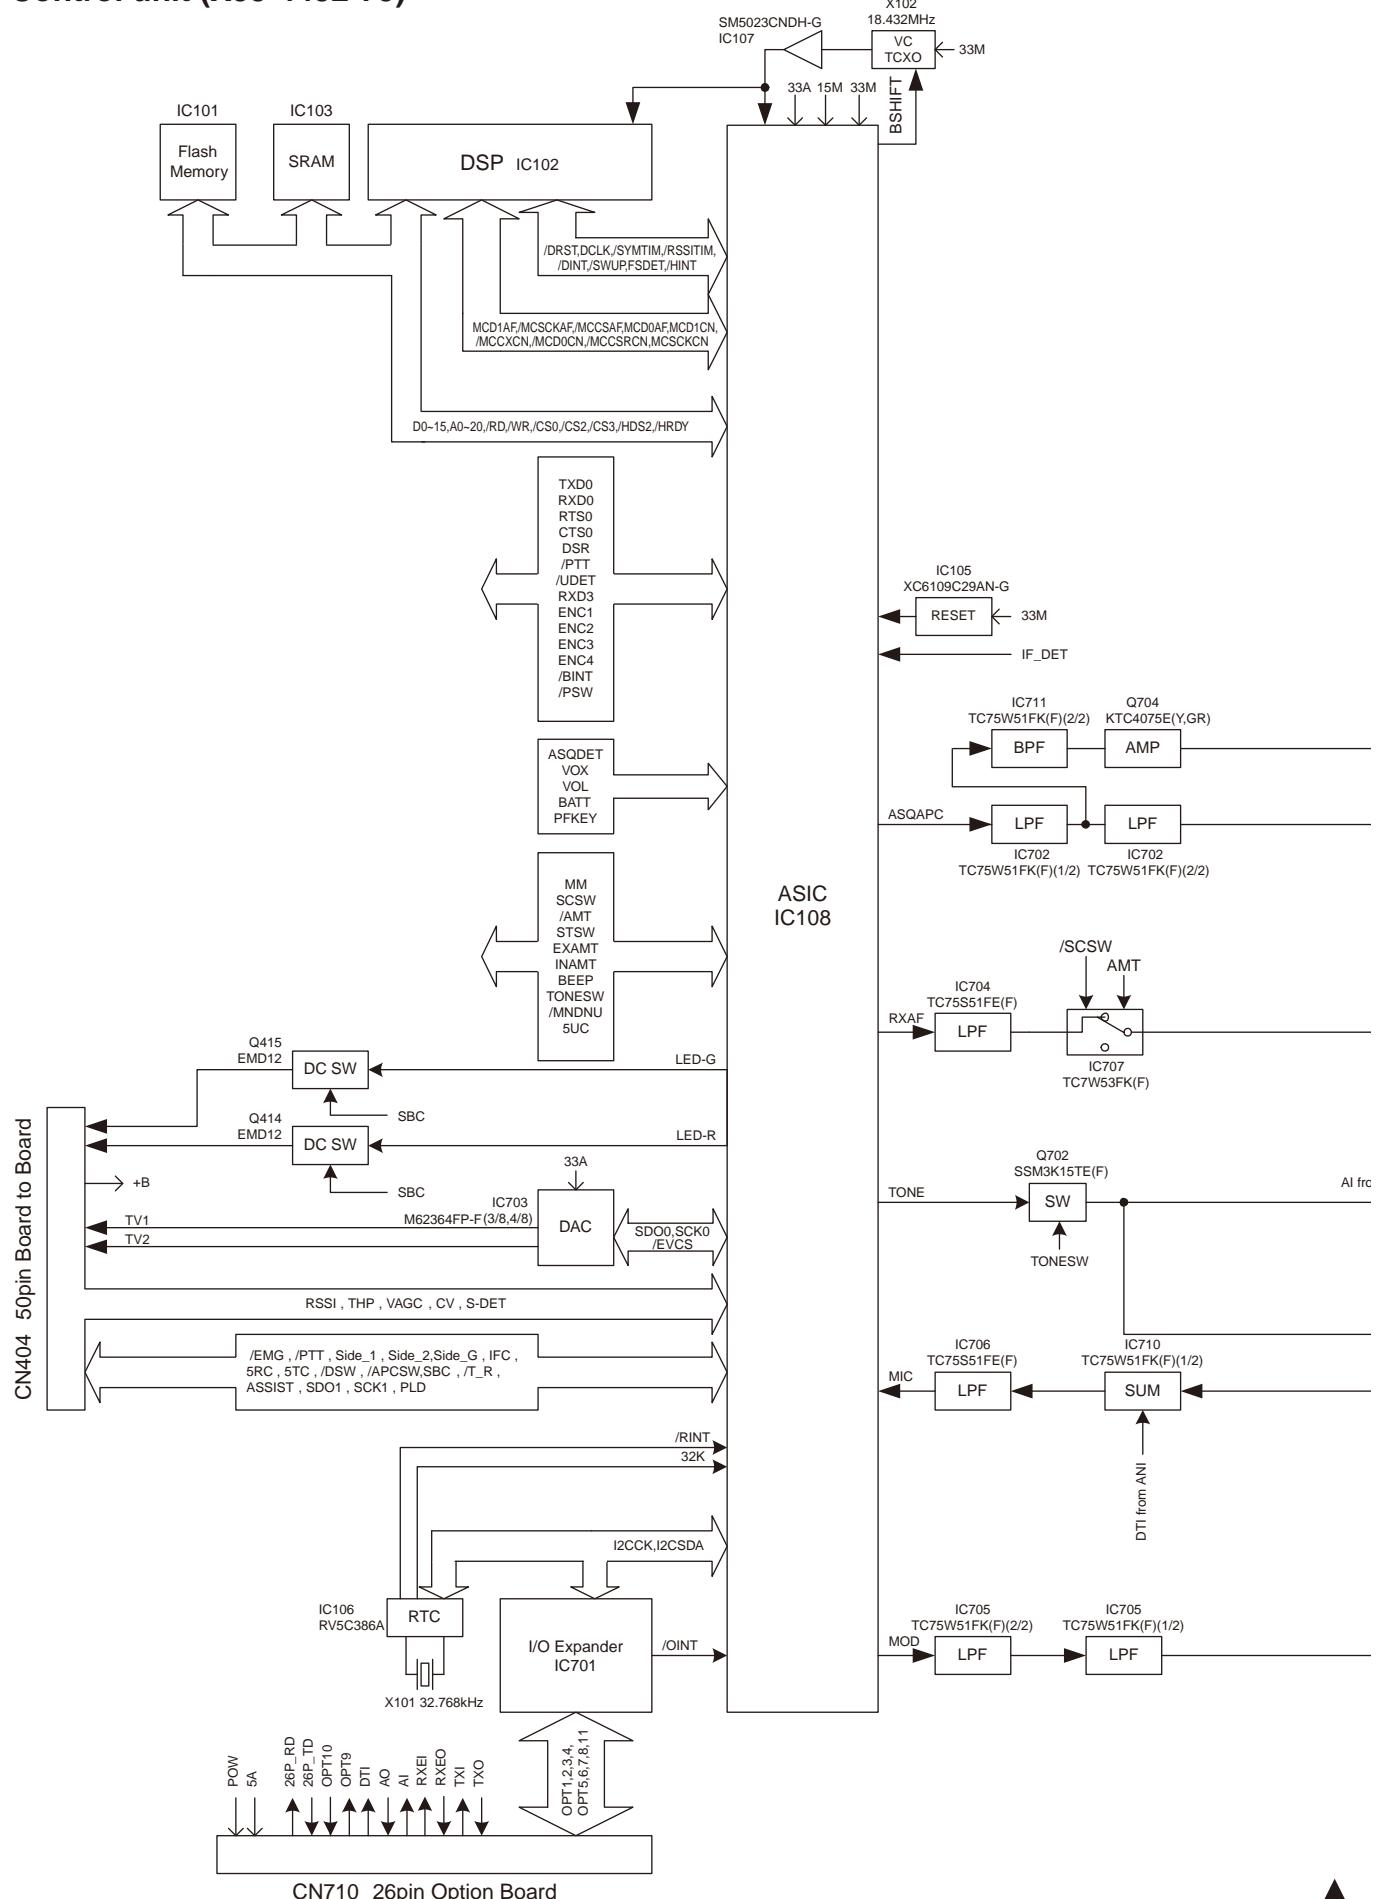


BLOCK DIAGRAM NX-200(S)

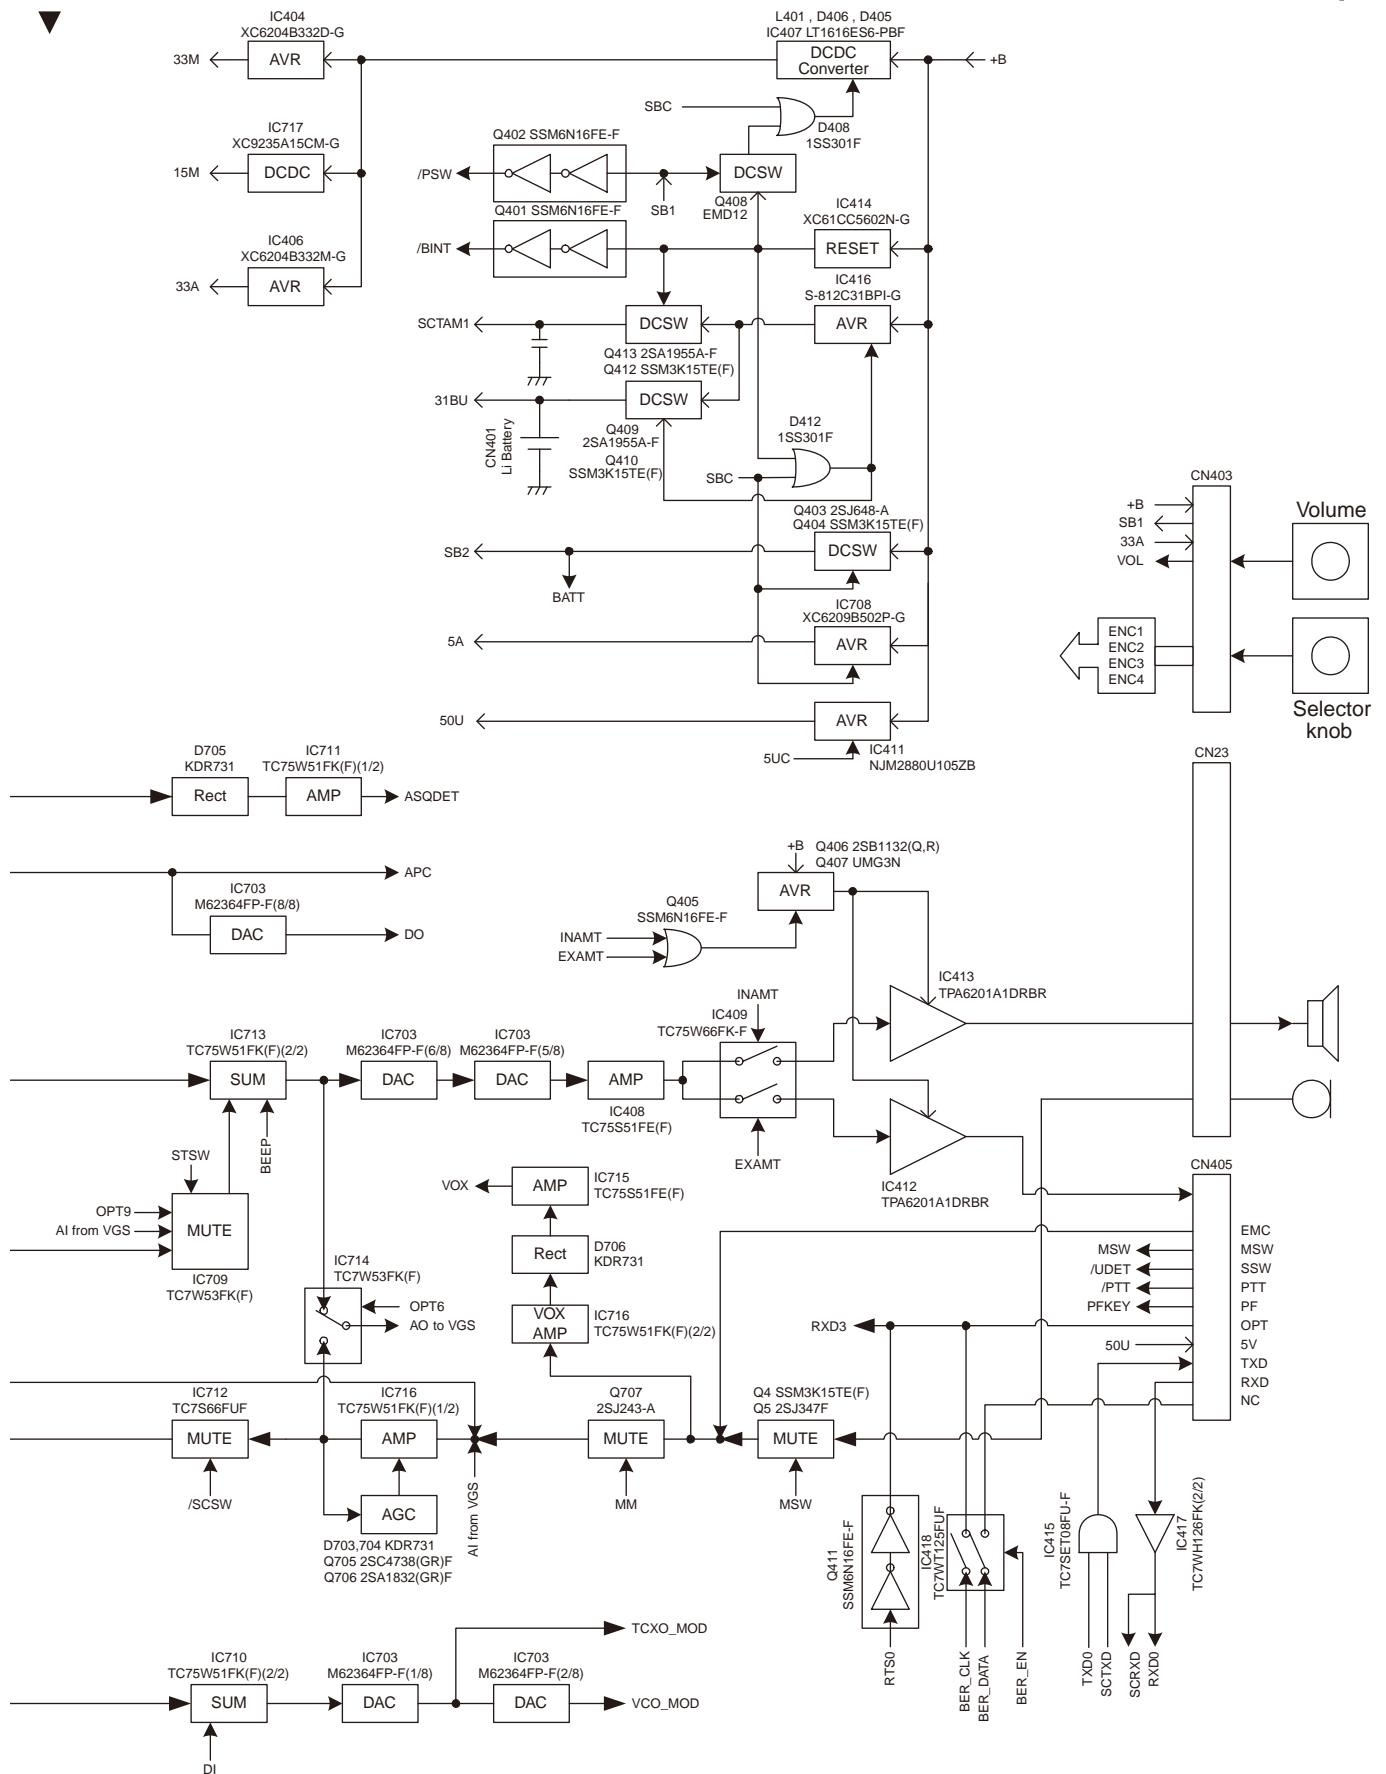




NX-200(S)

BLOCK DIAGRAM

TX-RX unit (X57-7820-10)

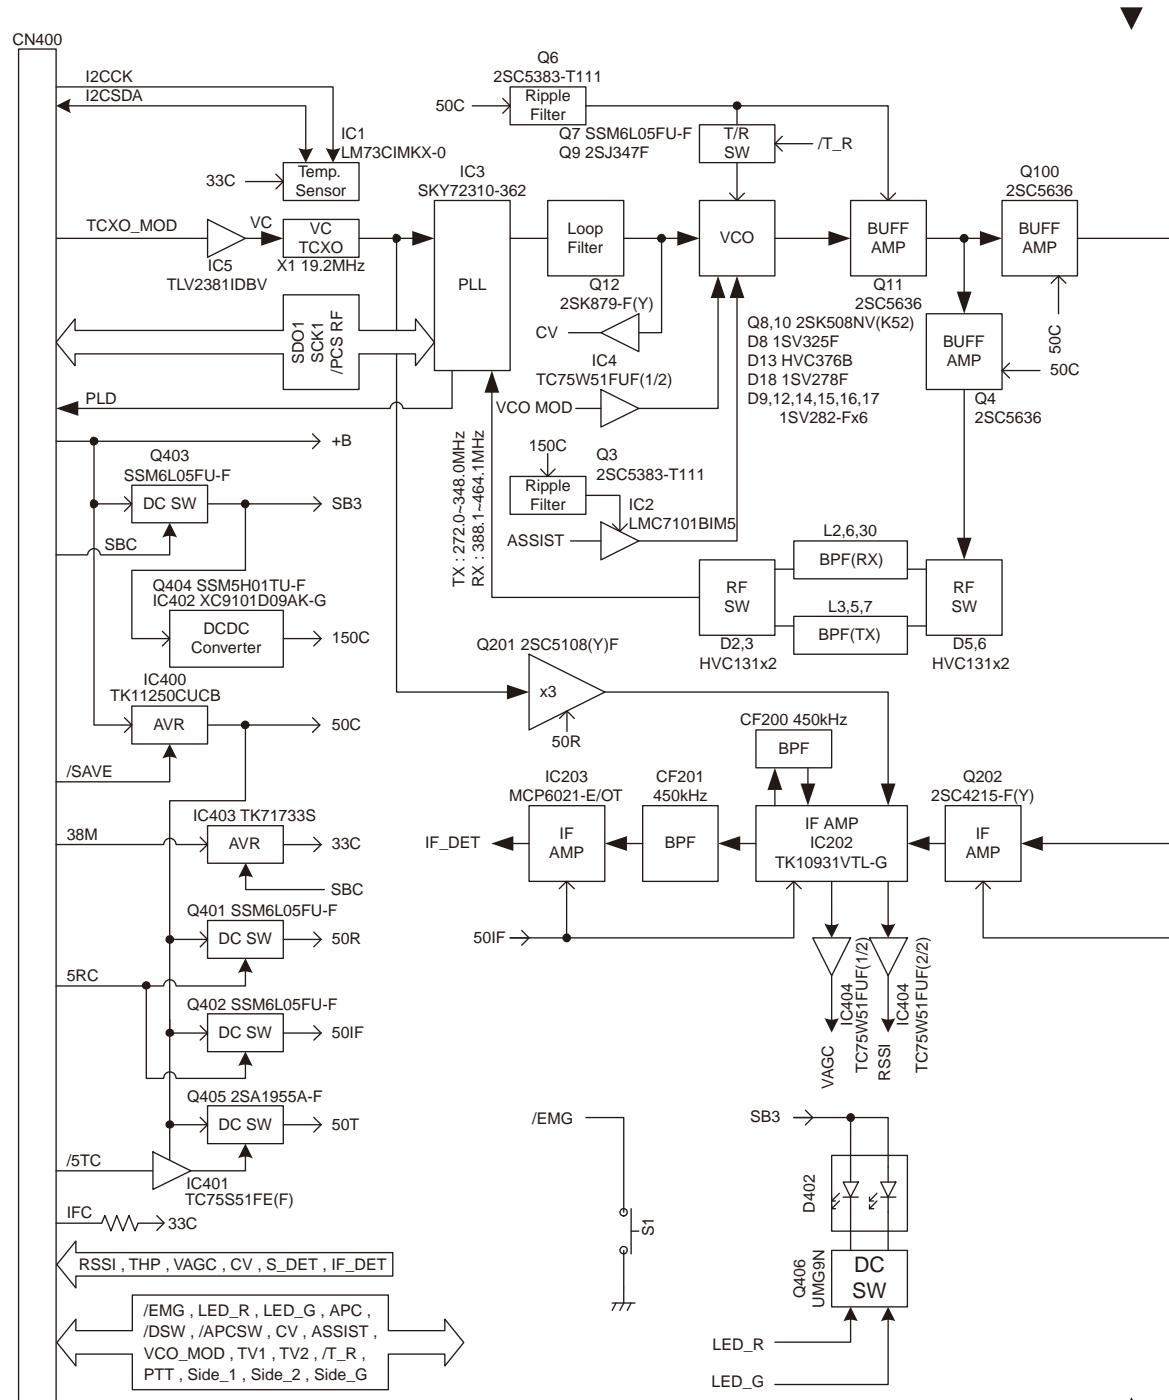

BLOCK DIAGRAM

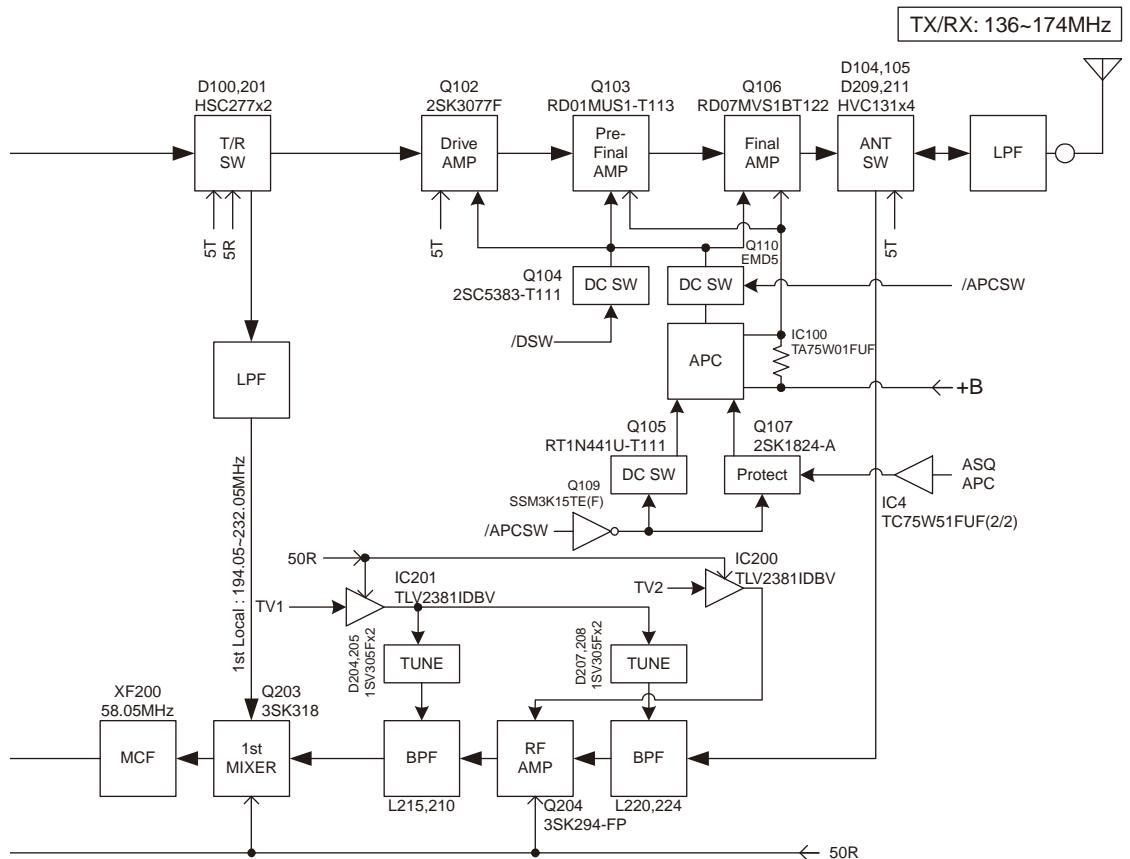

NX-200(S)

LEVEL DIAGRAM


Receiver Section

100


REF (Center Frequency)

IEI (58,05MHz)

2

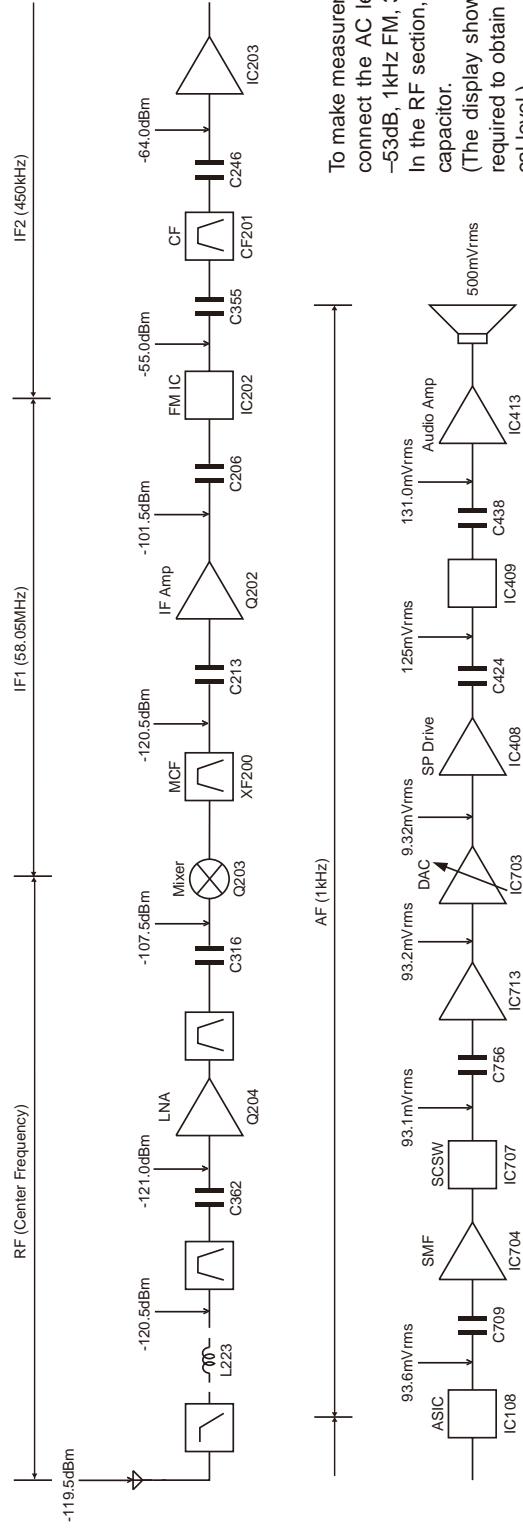

Transmitter Section

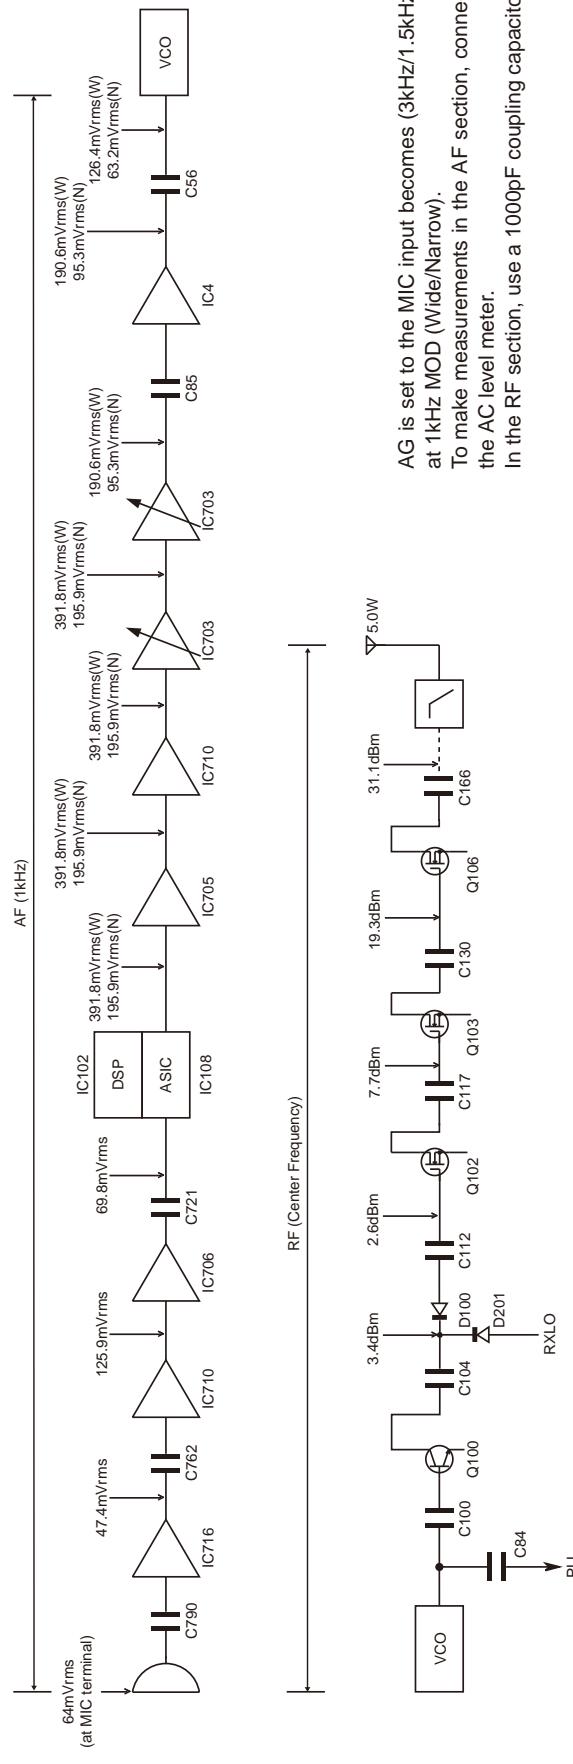

OPTIONAL ACCESSORIES

KNB-47L (Li-ion Battery Pack)


■ External View



■ Specifications

Voltage..... 7.4V
Battery capacity..... 1950mAh

■ Schematic Diagram

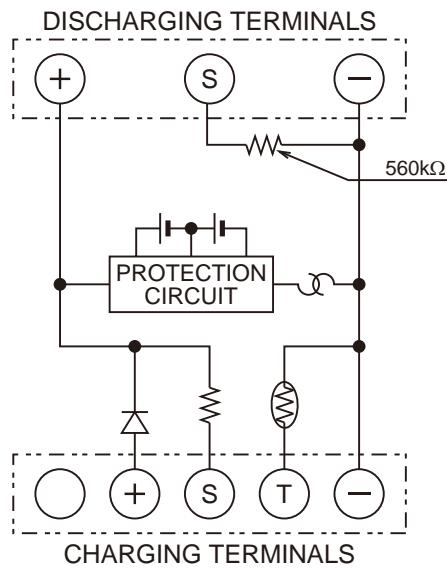

KNB-48L (Li-ion Battery Pack)


■ External View



■ Specifications

Voltage..... 7.4V
Battery capacity..... 2550mAh

■ Schematic Diagram

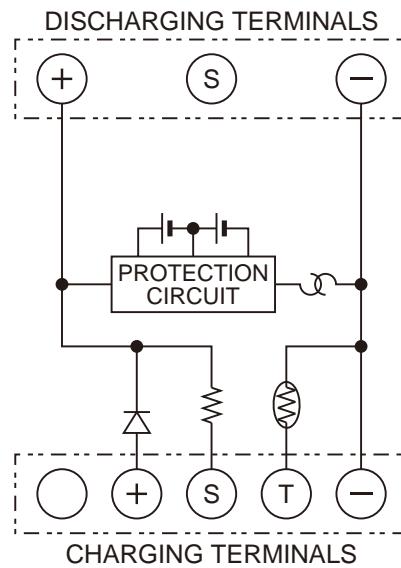

NX-200(S)

SPECIFICATIONS

GENERAL

Frequency Range	136~174 MHz
Number of Channels.....	64
Zones.....	4
Max. Channels per Zone	16
Channel Spacing	Analog: 12.5/15/25/30 kHz Digital: 6.25/12.5 kHz
Operating Voltage	7.5V DC ± 20%
Battery Life (with KNB-48L)	5-5-90 duty cycle: More than 14.5 hours 10-10-80 duty cycle: More than 9.0 hours
Operating Temperature Range	-22°F to +140°F (-30°C to +60°C)
Frequency Stability	±2.0ppm
Antenna Impedance	50Ω
Dimensions (W x H x D) (Projections not included)	
Radio only	2.28 x 5.05 x 1.64 in (58 x 128.3 x 41.7 mm)
with KNB-47L	2.28 x 5.05 x 1.64 in (58 x 128.3 x 41.7 mm)
with KNB-48L	2.28 x 5.05 x 1.93 in (58 x 128.3 x 49.1 mm)
Weight (net)	
Radio only	9.0 oz (255 g)
with KNB-47L	13.1 oz (370 g)
with KNB-48L	14.1 oz (400 g)

RECEIVER

Sensitivity	Digital @6.25kHz (3% BER): 0.20µV Digital @12.5kHz (3% BER): 0.25µV
	Analog (12dB SINAD): 0.25µV
Selectivity	Analog @25kHz: 72dB Analog @12.5kHz: 65dB
Intermodulation	Analog: 70dB (±50, 100kHz)
Spurious Response	Analog: 70dB
Audio Distortion	Less than 3%
Audio Output.....	500mW/8Ω

TRANSMITTER

RF Power Output High/Low	5W/1W
Spurious Response	70dB
FM Hum and Noise	Analog @25kHz: 45dB Analog @12.5kHz: 40dB
Audio Distortion	Less than 3%
Modulation	16K0F3E, 11K0F3E, 8K30F1E, 8K30F1D, 8K30F7W, 4K00F1E, 4K00F1D, 4K00F7W, 4K00F2D

Analog measurements made per TIA/EIA 603 and specifications shown are typical.

JVC KENWOOD Corporation reserves the right to change specifications without prior notice or obligation.

JVC KENWOOD Corporation

3-12, Moriyacho, Kanagawa-ku, Yokohama-shi,
Kanagawa, 221-0022 Japan

Kenwood U.S.A. Corporation

P.O. BOX 22745, 2201 East Dominguez Street, Long Beach,
CA 90801-5745, U.S.A.

Kenwood Electronics Canada Inc.

6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8

Kenwood Electronics Deutschland GmbH

Rembrücker Str. 15, 63150 Heusenstamm, Germany

Kenwood Electronics Belgium N.V.

Leuvensesteenweg 248 J, 1800 Vilvoorde, Belgium

Kenwood Electronics France S.A.

L'Etoile Paris Nord 2, 50 Allée des Impressionnistes,
Bp 58416 Villepinte, 95944 Roissy Ch De Gaulle Cedex

Kenwood Electronics UK Limited

KENWOOD House, Dwight Road, Watford, Herts.,
WD18 9EB United Kingdom

Kenwood Electronics Europe B.V.

Amsterdamseweg 37, 1422 AC Uithoorn, The Netherlands

Kenwood Electronics Italia S.p.A.

Via G. Sirtori, 7/9 20129 Milano, Italy

Kenwood Ibérica, S.A.

Carretera de Rubí, 88 Planta 1 A 08174 Sant Cugat del Vallès
Barcelona, Spain

Kenwood Electronics Australia Pty. Ltd.

Talavera Business Park Building A, 4 Talavera Road,
North Ryde NSW 2113 Australia

Kenwood Electronics (Hong Kong) Ltd.

Suite 2504, 25/F, Tower 2, Nina Tower, No. 8 Yeung Uk Road,
Tsuen Wan, New Territories, Hong Kong

Kenwood Electronics Singapore Pte Ltd


1 Ang Mo Kio Street 63, Singapore 569110

NX-200(S) PC BOARD


PC BOARD NX-200(S)

CONTROL UNIT (X53-4432-75)
Component side view (J79-0131-39)

CONTROL UNIT (X53-4432-75)
Component side view (J79-0131-39)

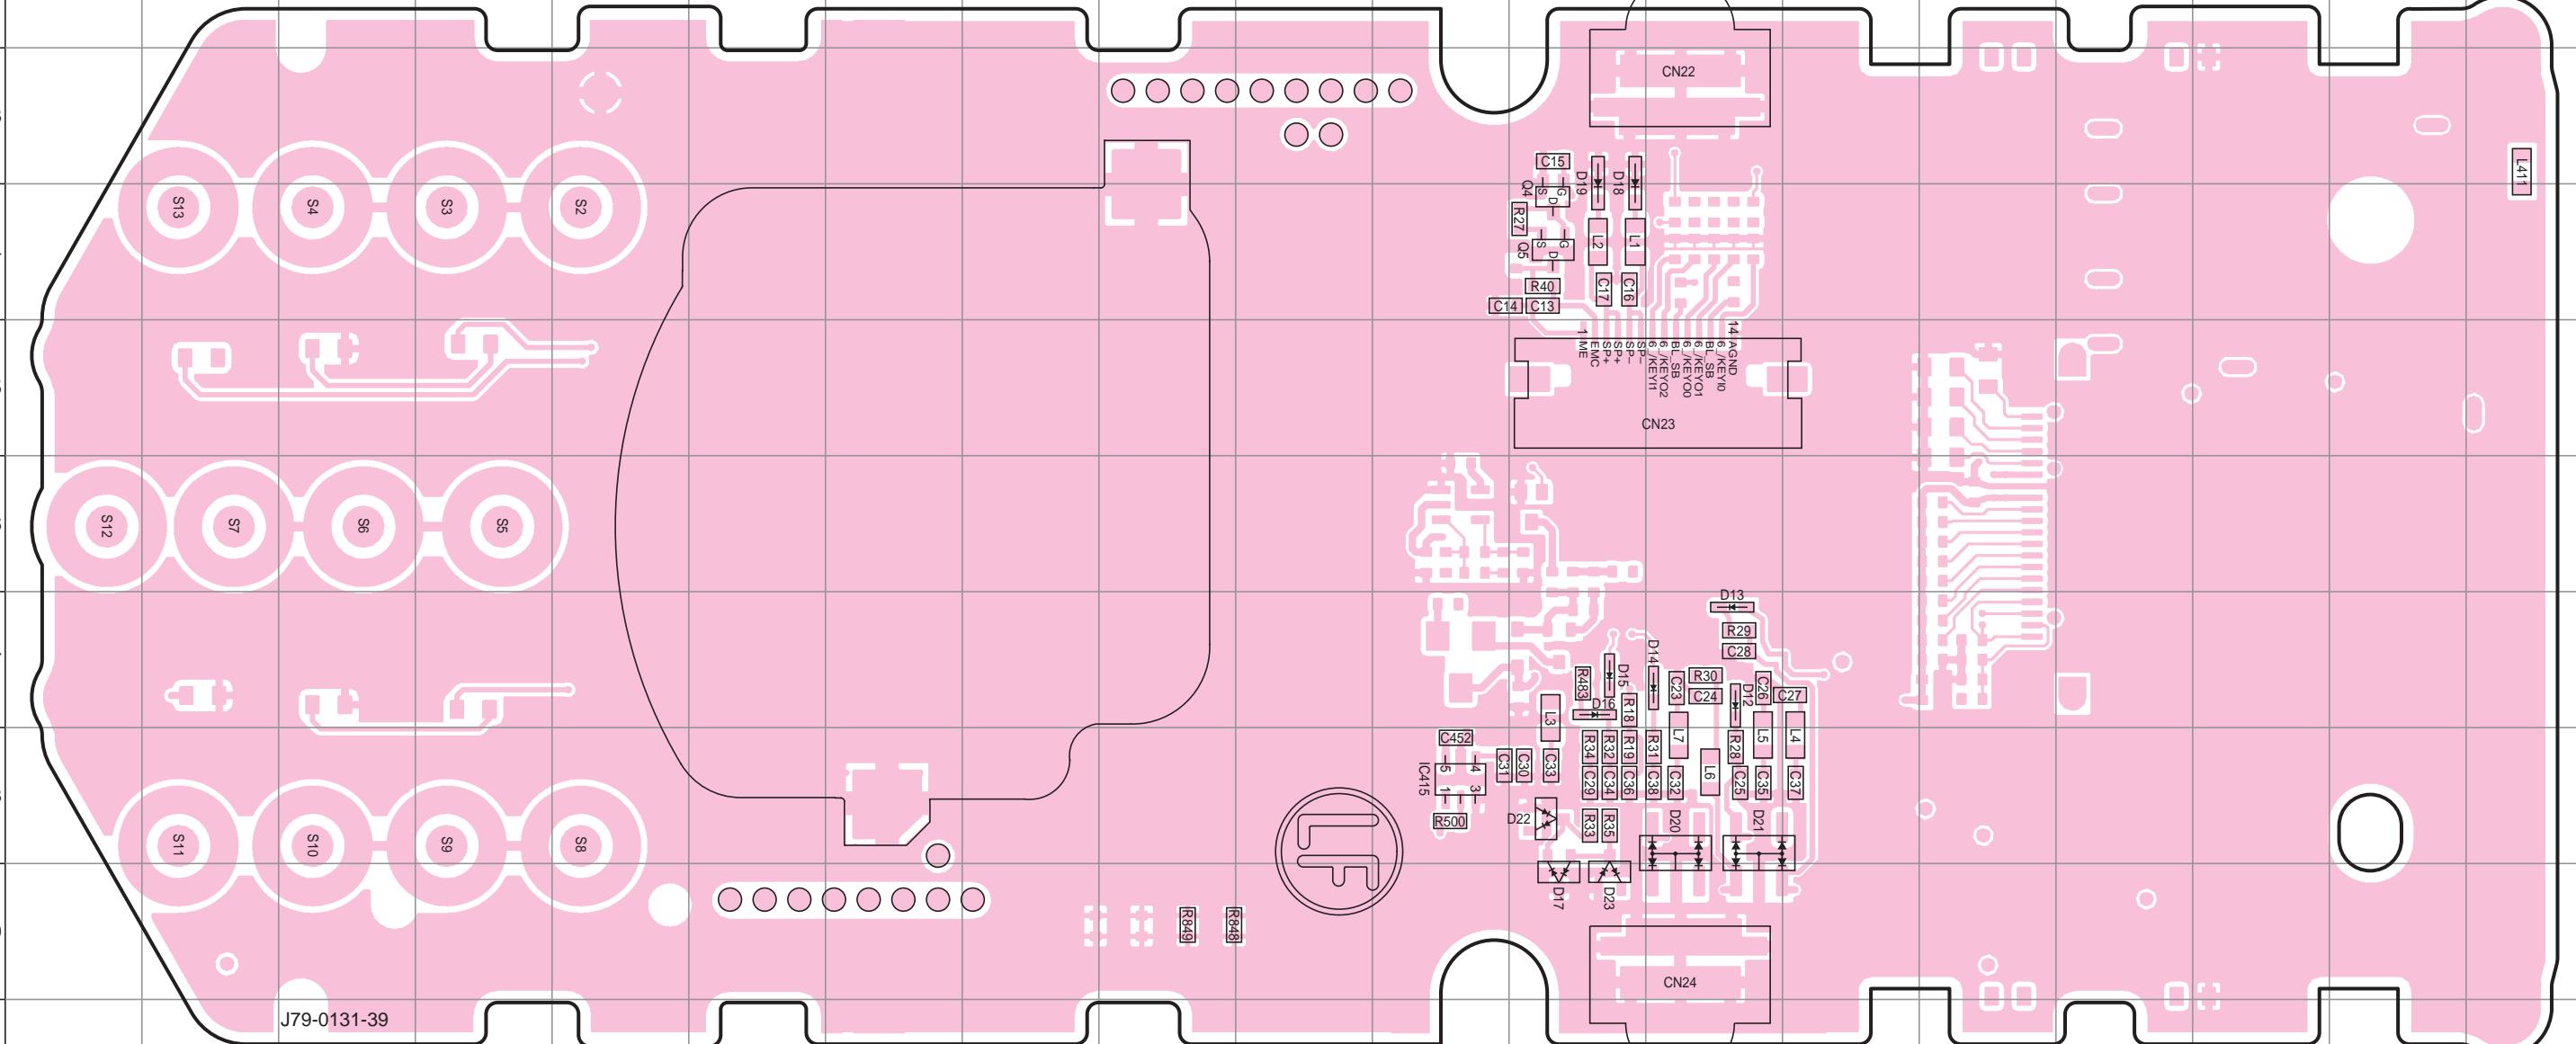

Ref. No.	Address	Ref. No.	Address
IC415	8K	D16	7L
Q4	4L	D17	9L
Q5	4L	D18	4L
D11	7L	D19	4L
D12	7M	D20	8M
D13	7M	D21	8M
D14	7M	D22	8L
D15	7L	D23	9L




NX-200(S) PC BOARD

PC BOARD

NX-200(S)


CONTROL UNIT (X53-4432-75)
Foil side view (J79-0131-39)

CONTROL UNIT (X53-4432-75)
Foil side view (J79-0131-39)

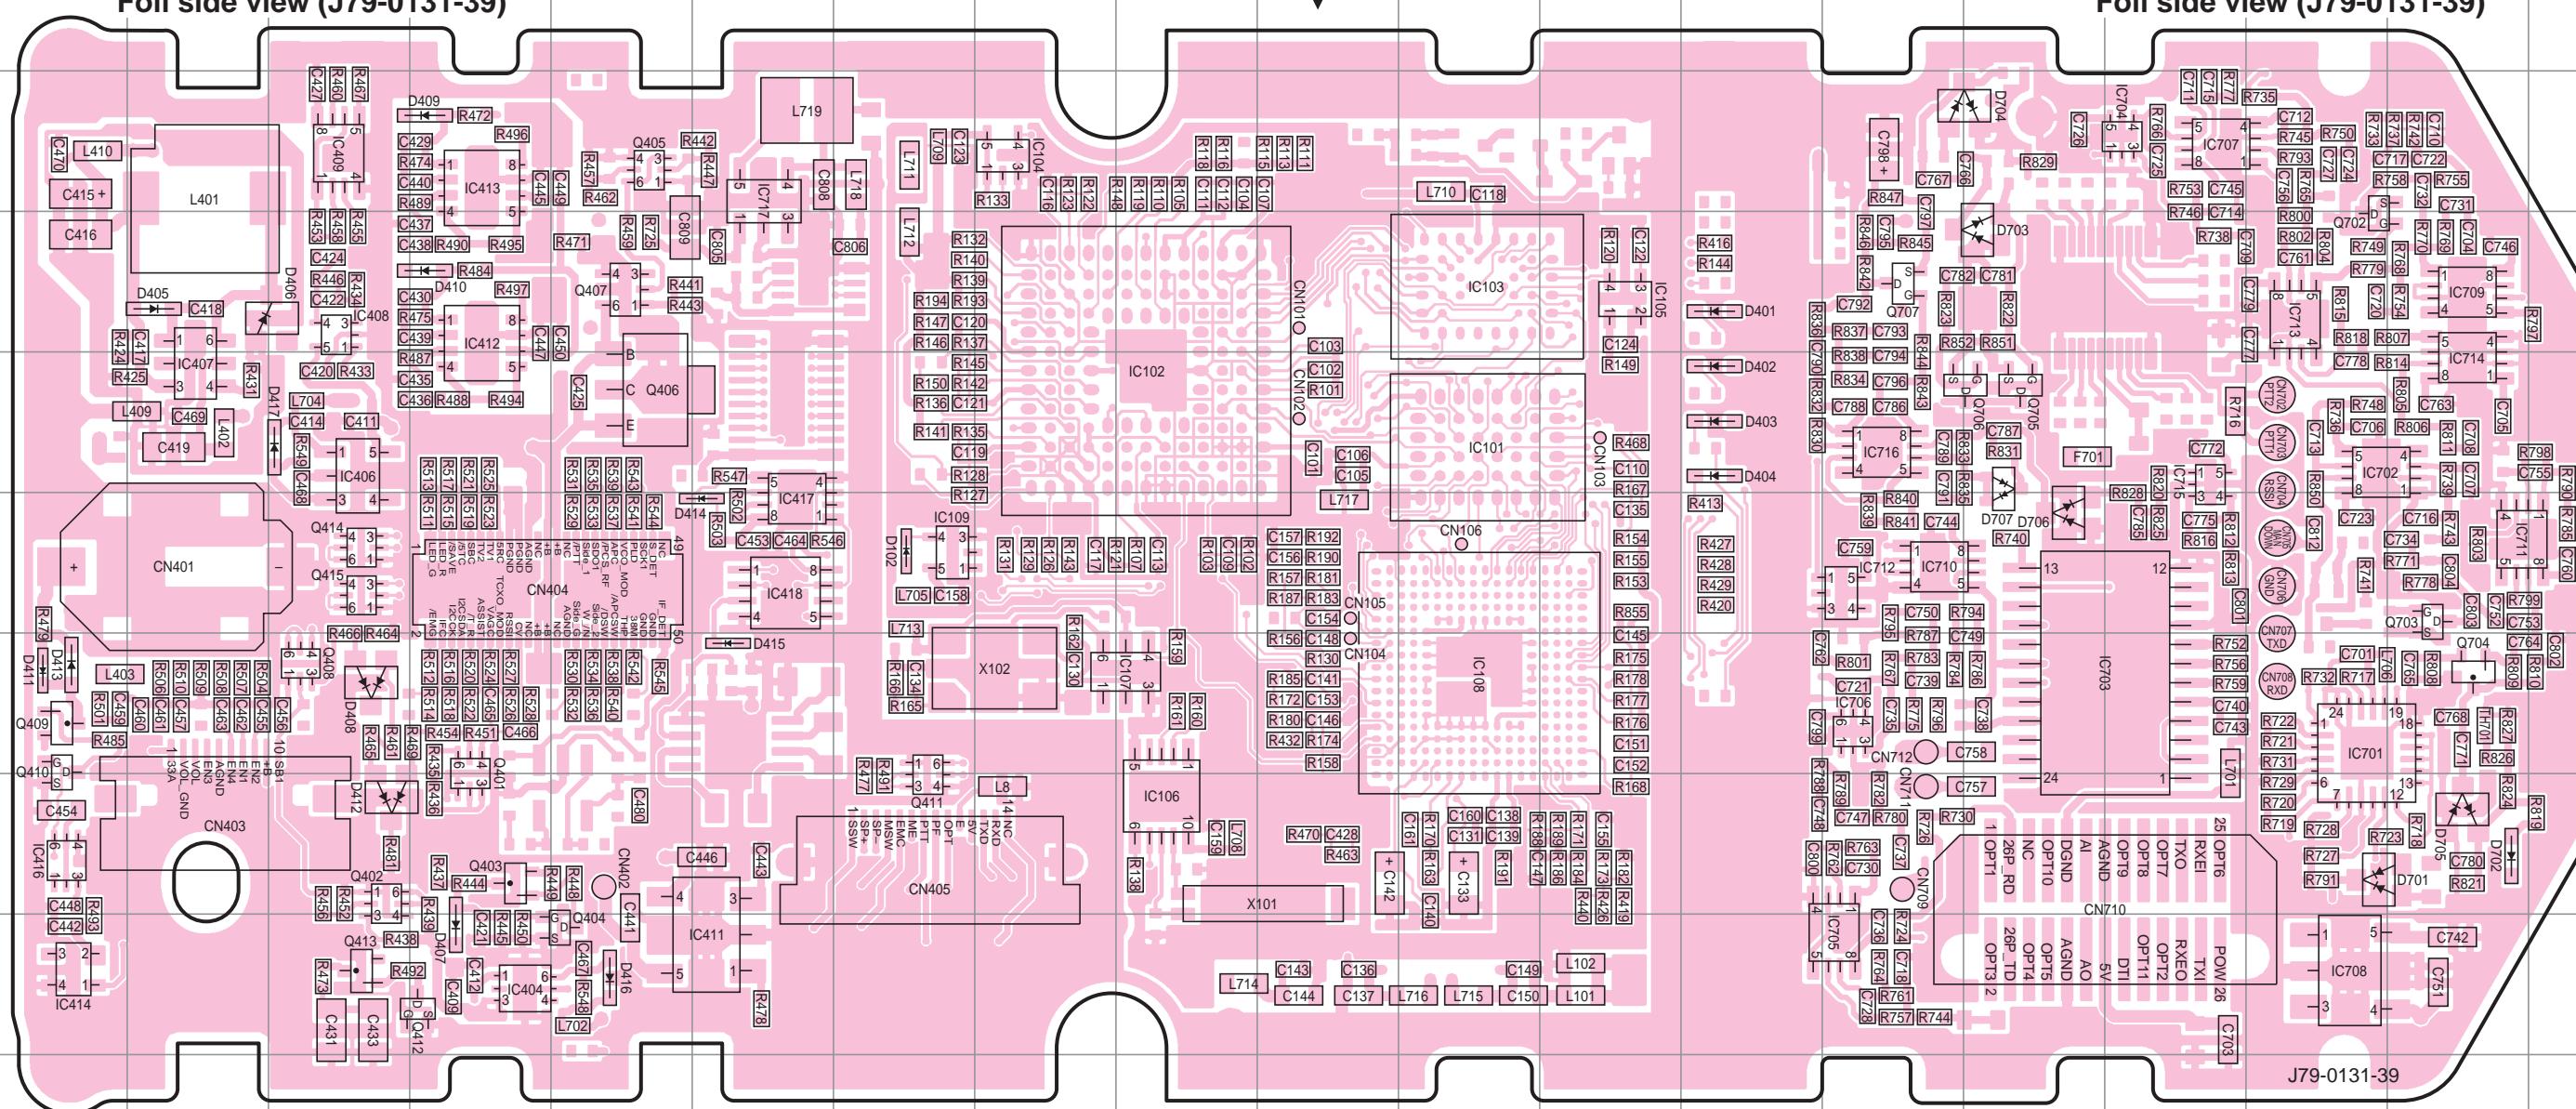

Component side


Ref. No.	Address														
IC101	5K	IC408	4C	IC704	3P	IC716	5N	Q411	8G	D404	5M	D416	9E		
IC102	5I	IC409	3C	IC705	9N	IC717	3F	Q412	9D	D405	4B	D417	5C		
IC103	4K	IC411	9F	IC706	7N	Q401	8D	Q413	9C	D406	4C	D701	8R		
IC104	3H	IC412	4D	IC707	3P	Q402	8C	Q414	6C	D407	9D	D702	8R		
IC105	4L	IC413	3D	IC708	9Q	Q403	8D	Q415	6C	D408	7C	D703	4O		
IC106	8I	IC414	9A	IC709	4R	Q404	9E	Q702	4R	D409	3D	D704	3O		
IC107	7I	IC416	8A	IC710	6N	Q405	3E	Q703	6R	D410	4D	D705	8R		
IC108	7K	IC417	6F	IC711	6S	Q406	5E	Q704	7R	D411	7A	D706	6O		
IC109	6G	IC418	6F	IC712	6N	Q407	4E	Q705	5O	D412	8C	D707	6O		
IC404	9D	IC701	7Q	IC713	4Q	Q408	7C	Q706	5O	D413	7A				
IC406	5C	IC702	5R	IC714	5R	Q409	7A	Q707	4N	D414	6F				
IC407	5B	IC703	7P	IC715	5P	Q410	8A	D102	6G	D415	7F				



Foil side

NX-200(S) PC BOARD

TX-RX UNIT (X57-7820-10) (A/2)
Component side view (J79-0127-39 A/2)

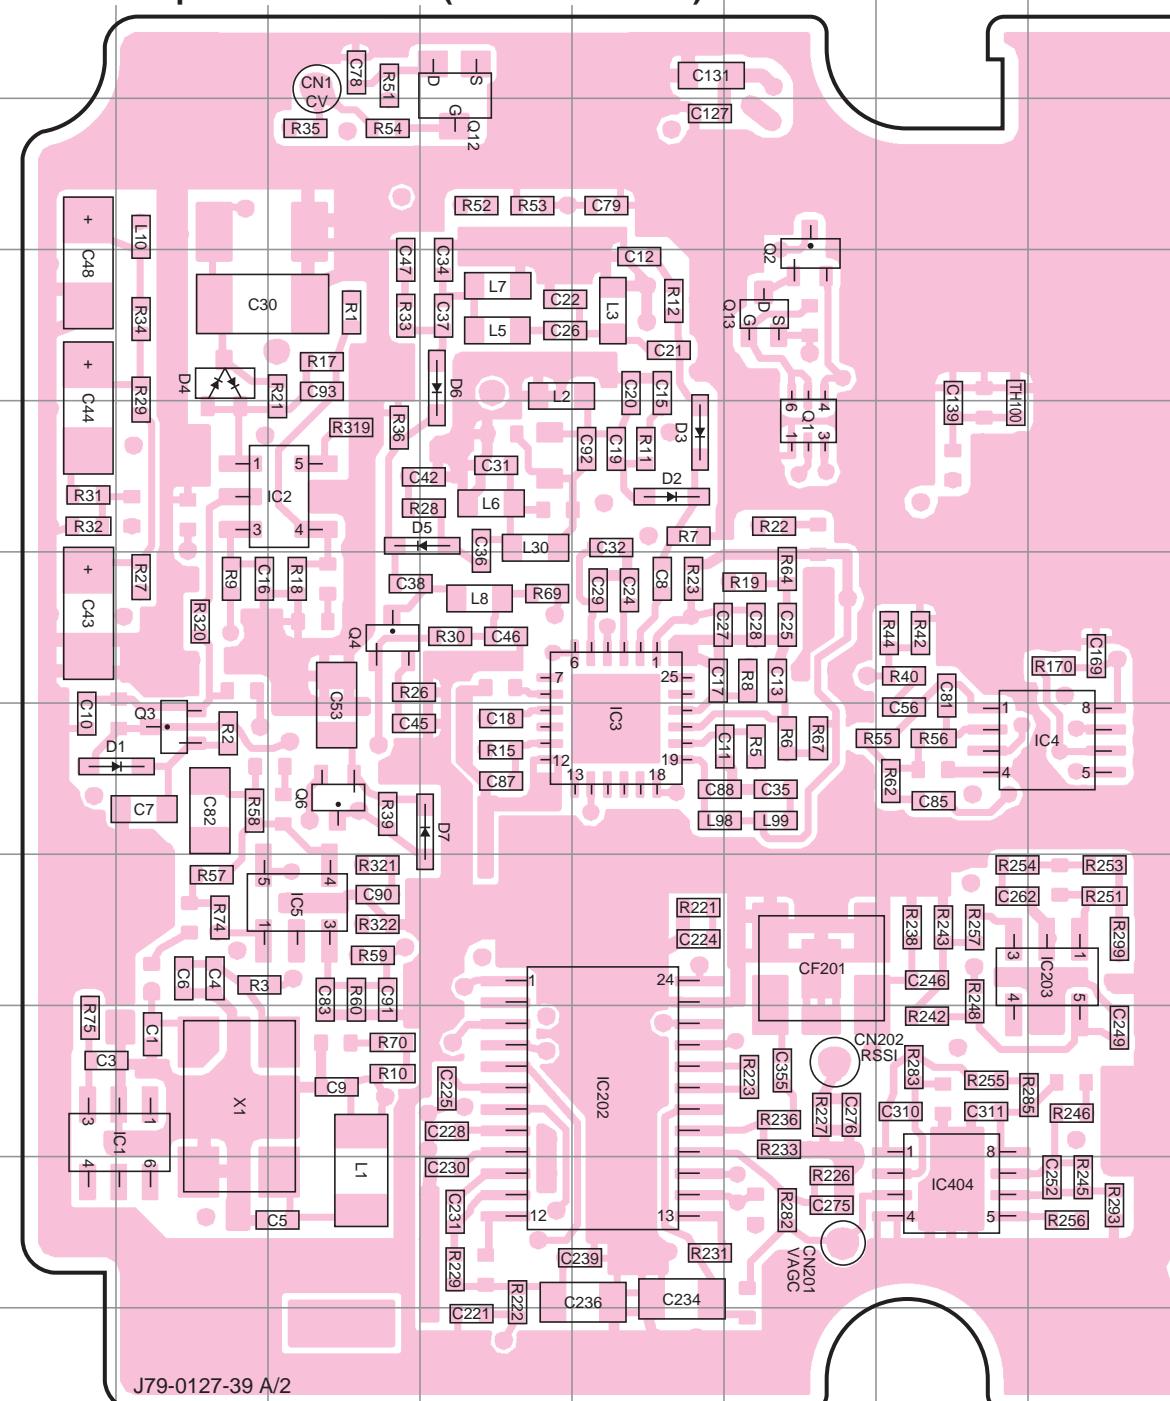


J79-0127-39 A/2

Ref. No.	Address										
IC1	9B	IC203	8H	Q4	6C	Q110	5I	D3	5E	D401	5P
IC2	5C	IC400	5N	Q6	7C	Q401	7M	D4	4B	D402	8P
IC3	7E	IC401	4P	Q12	3D	Q403	7N	D5	5D	D403	4N
IC4	7H	IC402	9O	Q13	4F	Q404	9O	D6	4D		
IC5	8C	IC404	10G	Q104	6J	Q405	4N	D7	7D		
IC100	4J	Q1	5F	Q105	4I	Q406	9P	D103	7J		
IC200	7K	Q2	4F	Q107	4J	D1	7B	D106	6I		
IC202	9E	Q3	7B	Q109	3I	D2	5E	D400	5M		

PC BOARD


TX-RX UNIT (X57-7820-10) (A/2)
Component side view (J79-0127-39 A/2)

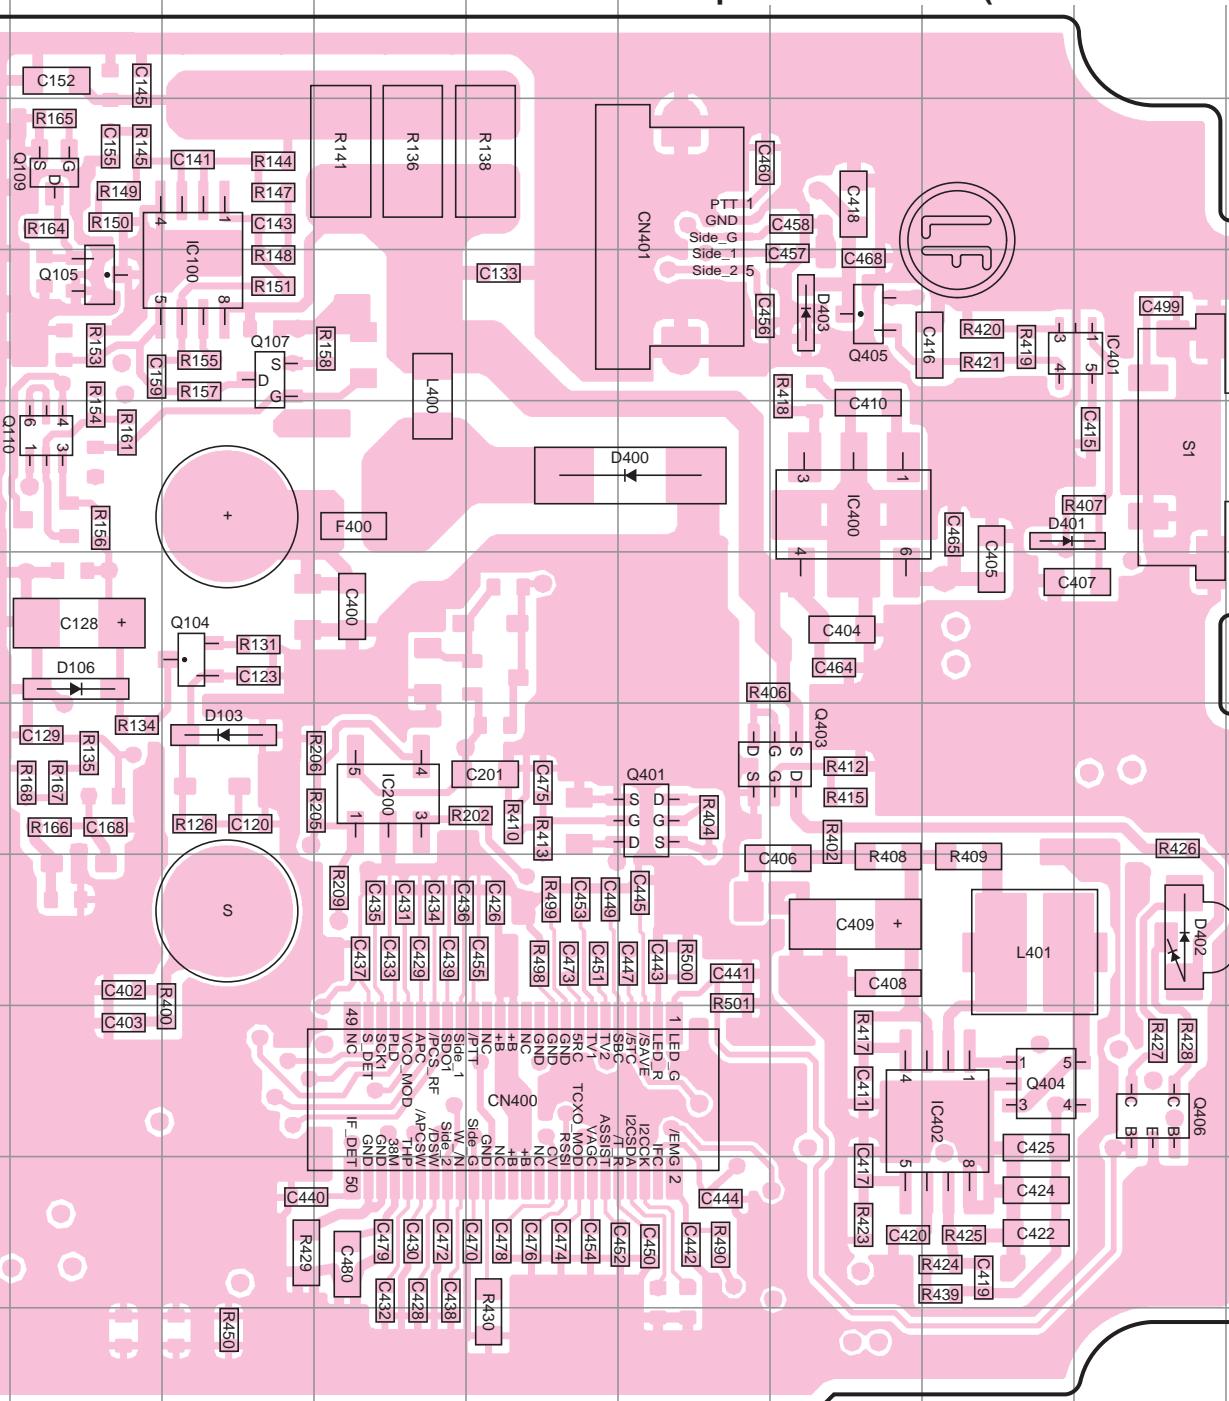

1

NX-200(S)

TX-RX UNIT (X57-7820-10) (B/2)

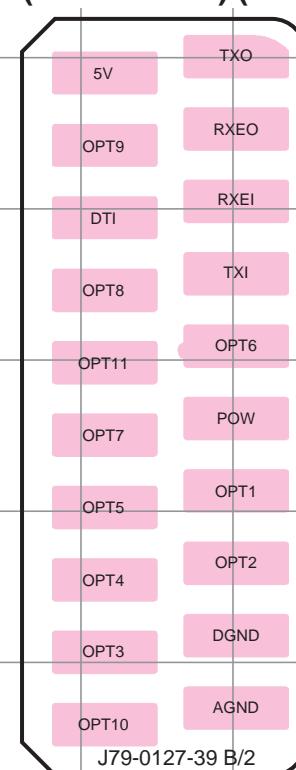

— 1 —

	Component side
Layer 1	
Layer 2	
Layer 3	
Layer 4	
Layer 5	
Layer 6	

Foil side

NX-200(S) PC BOARD

PC BOARD


NX-200(S)

TX-RX UNIT (X57-7820-10) (A/2)
Foil side view (J79-0127-39 A/2)


TX-RX UNIT (X57-7820-10) (A/2)
Foil side view (J79-0127-39 A/2)

TX-RX UNIT
(X57-7820-10) (B/2)


J79-0127-39 B/2

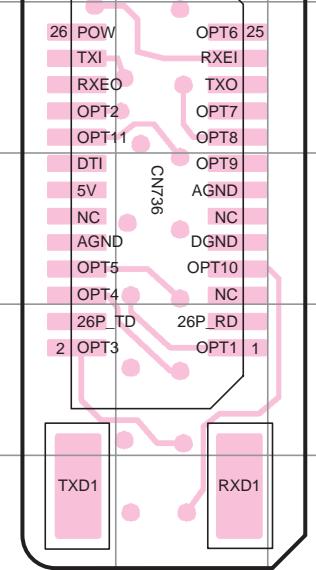


Component side




Ref. No.	Address										
IC201	8H	Q100	7P	Q204	10G	D15	4S	D201	8N	D213	6G
IC403	7D	Q102	6N	Q402	8D	D16	4Q	D204	11I		
Q7	7R	Q103	5N	D8	4Q	D17	4P	D205	10H		
Q8	5P	Q106	4L	D9	4Q	D18	5R	D207	9E		
Q9	6R	Q201	9R	D12	4R	D100	7N	D208	8E		
Q10	6R	Q202	10O	D13	4P	D104	4H	D209	6F		
Q11	7Q	Q203	9K	D14	4R	D105	4H	D211	6F		



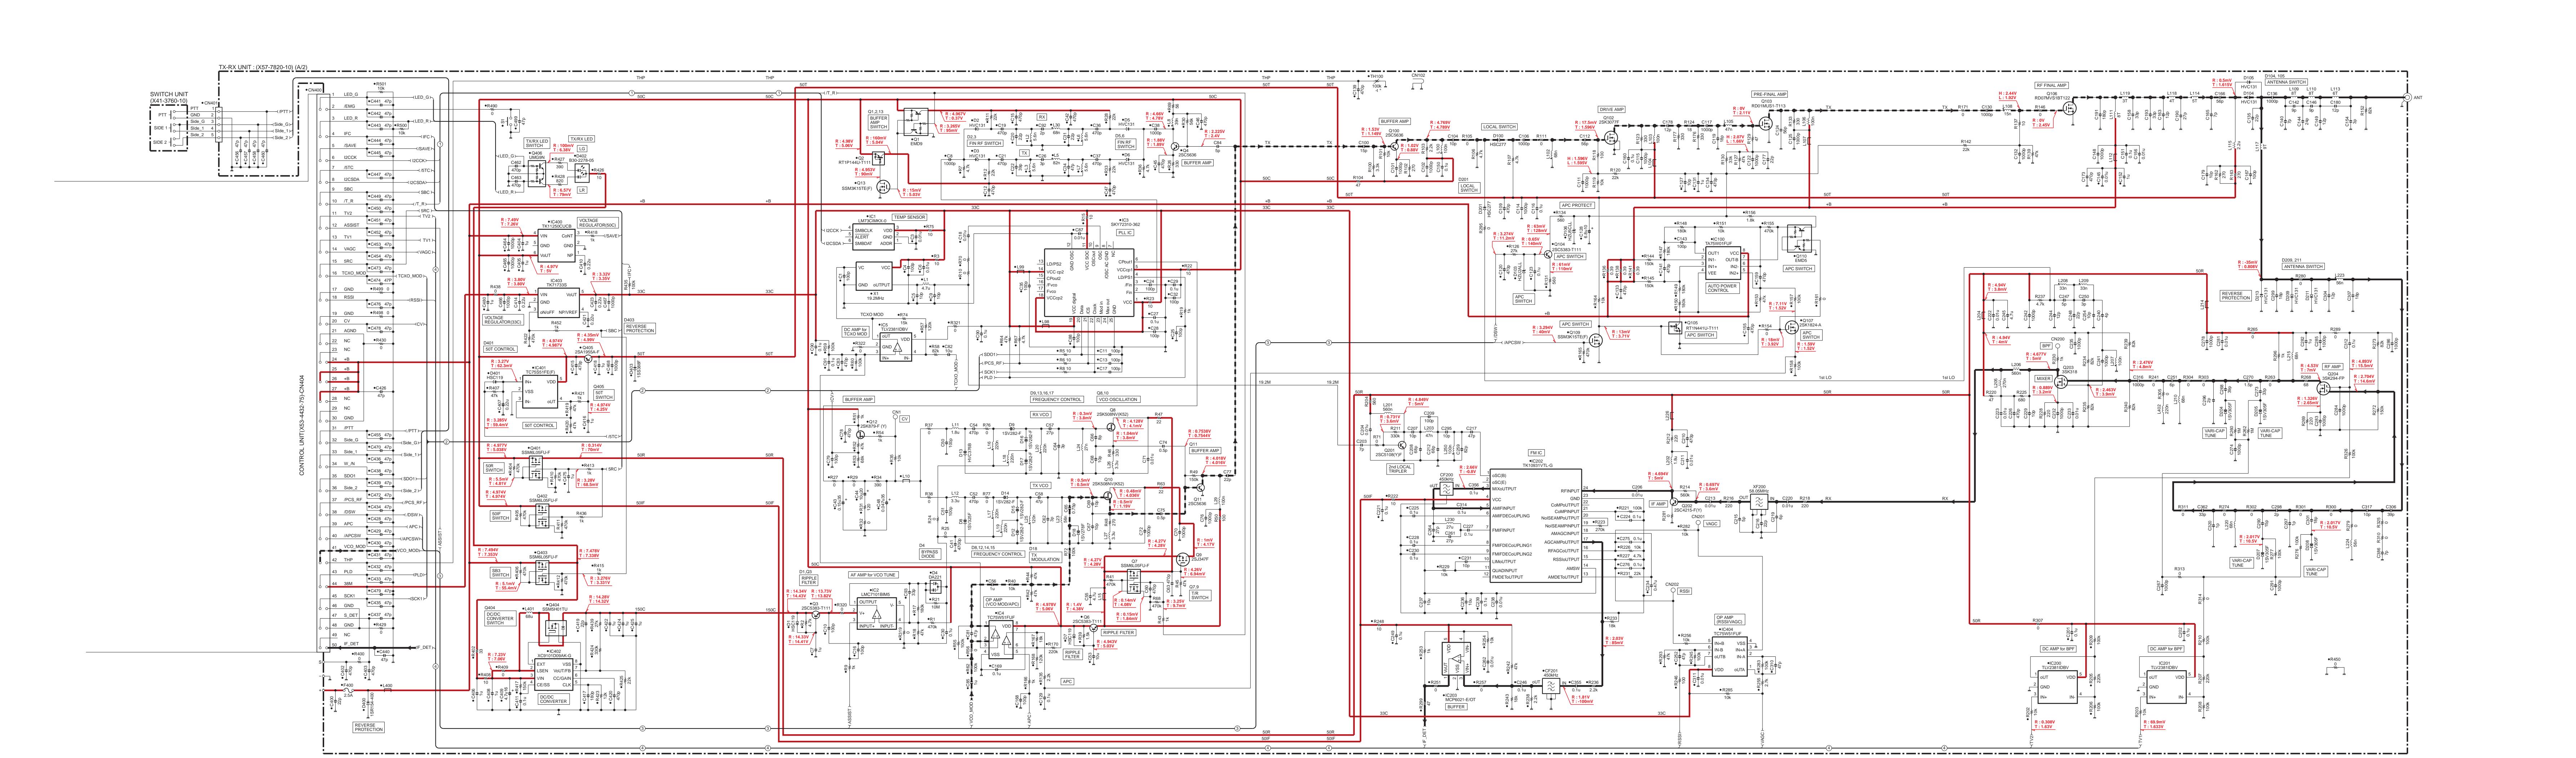

Control unit (X53-4432-75)

CN404 50pin Board to Board

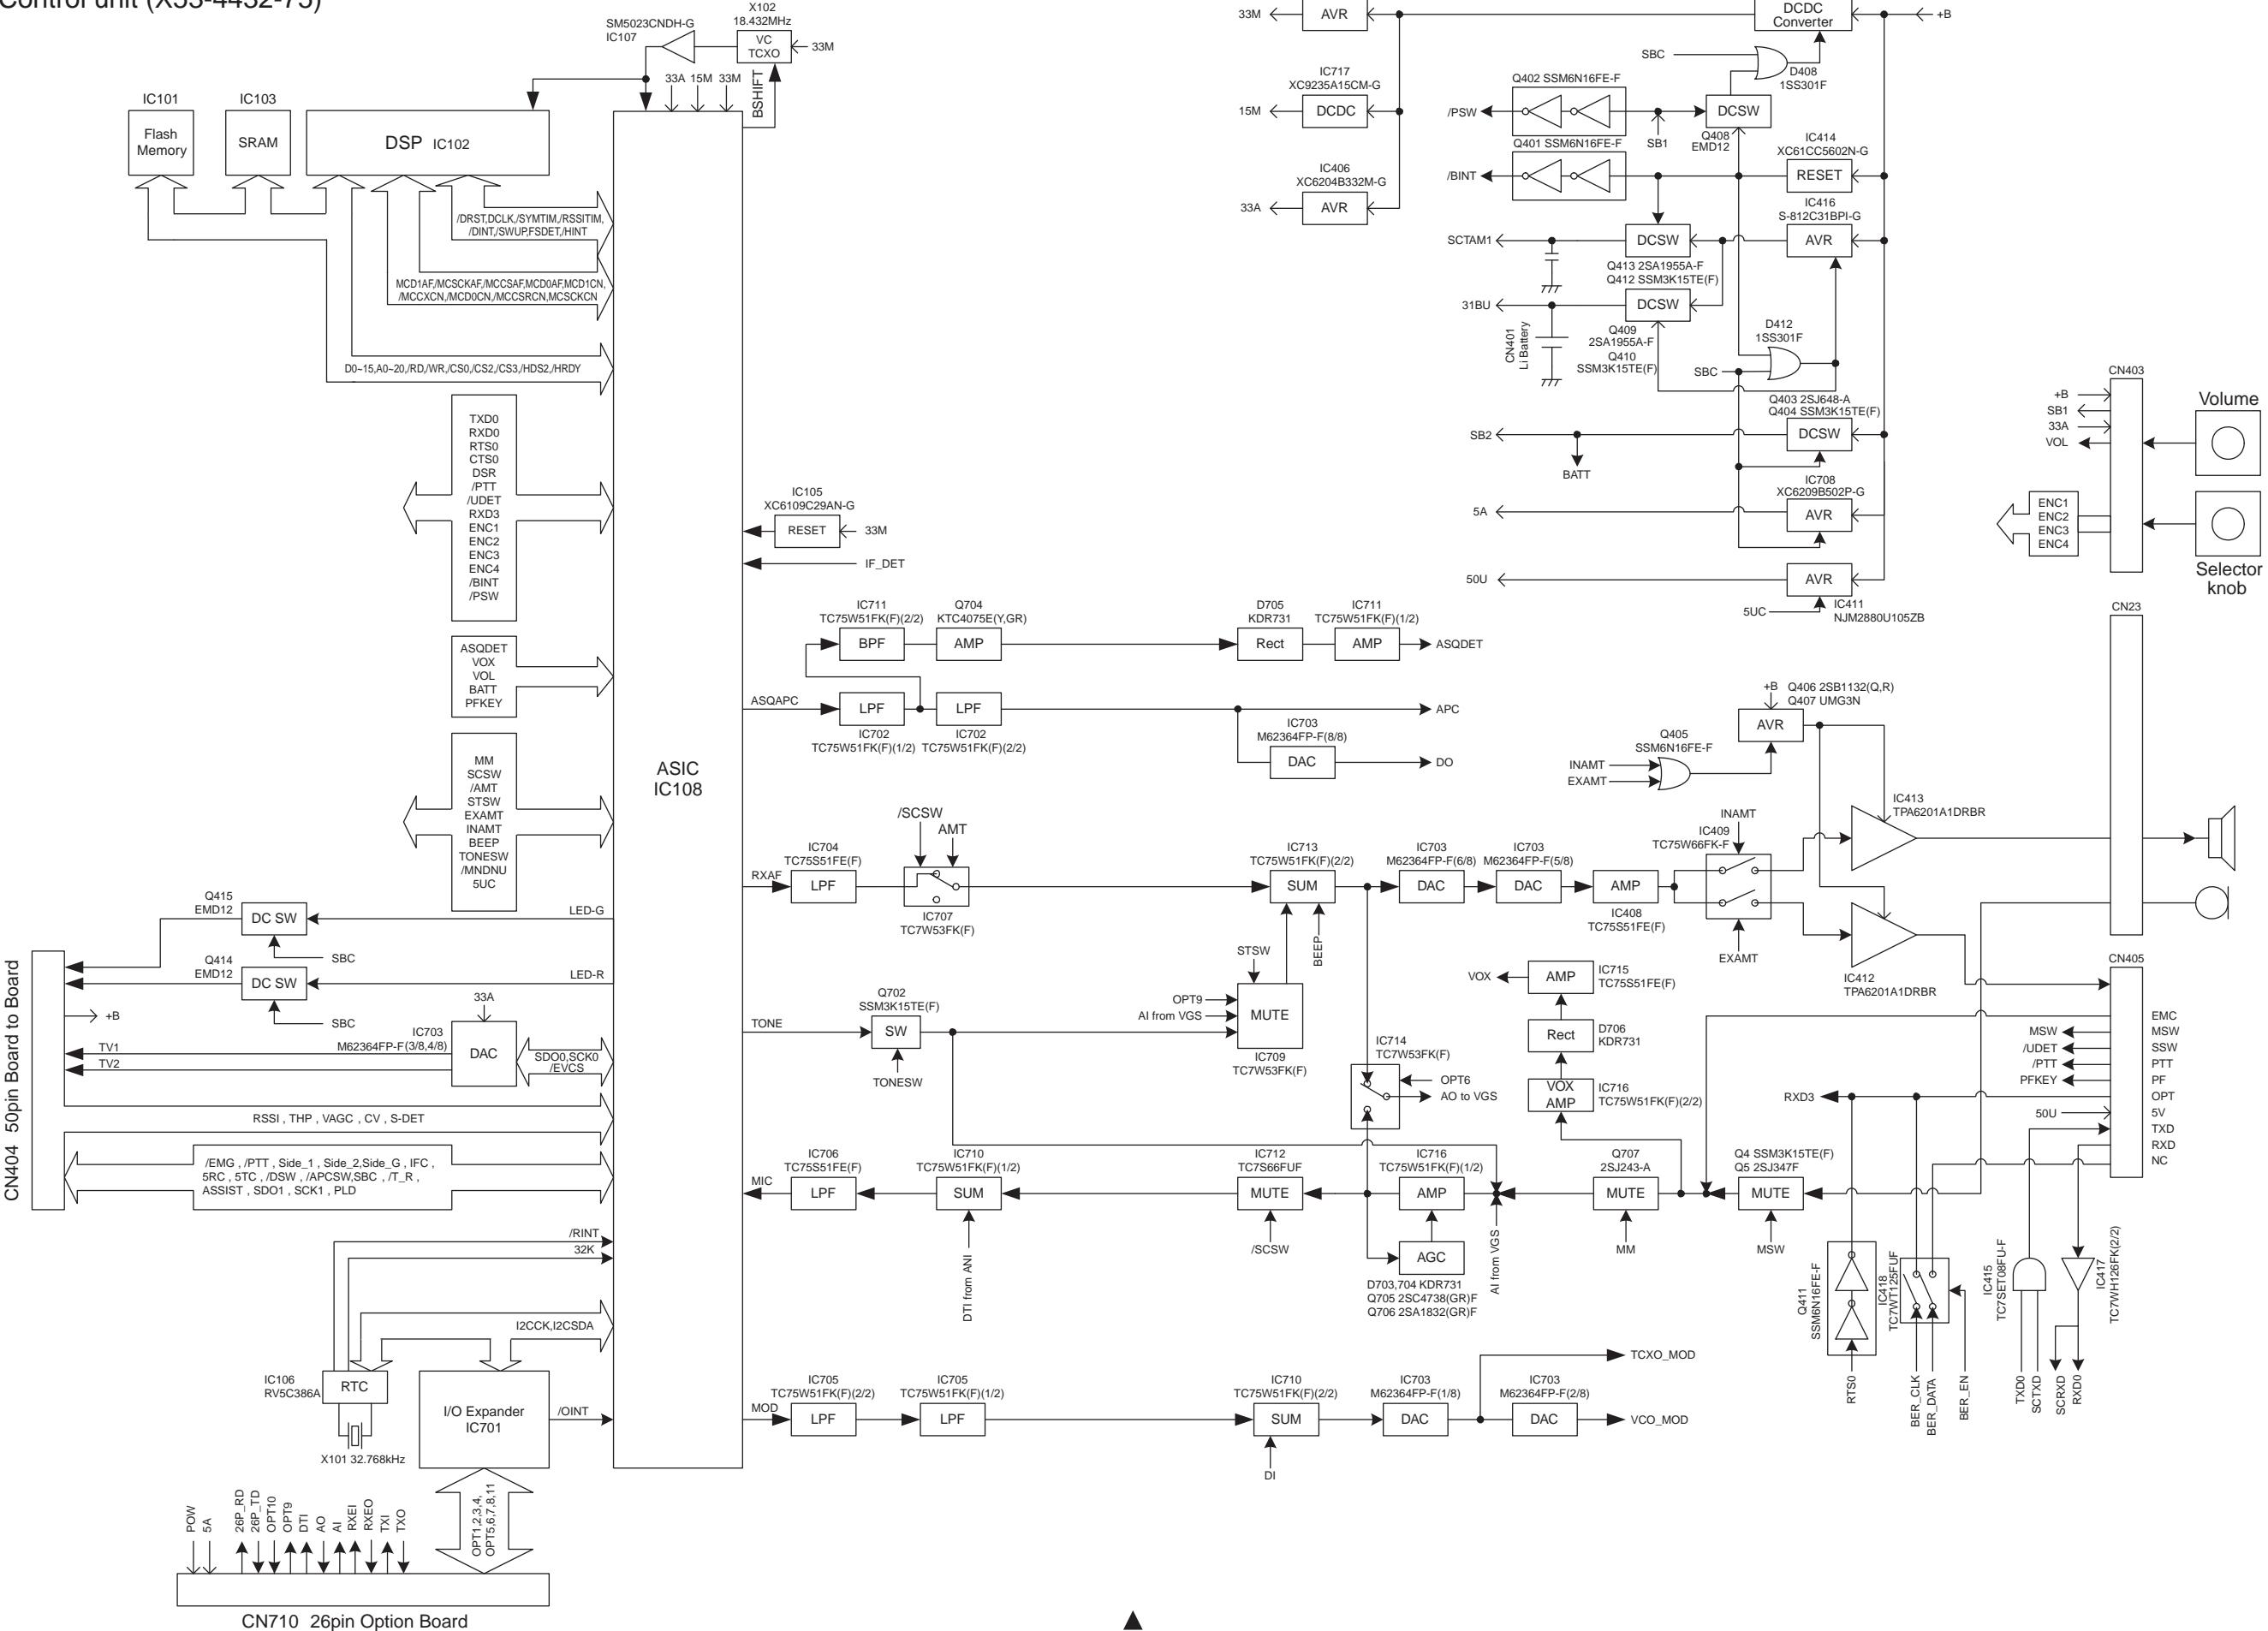

TX-RX unit (X57-7820-10)

